



ERKADO

Every house is fitted with interior doors. This is why approaching doors only from the point of view of their functionality and practicality has long been insufficient. Underlining the best qualities in a perfectly furnished house, today they are an important component of interior design. For this reason, we create modern solutions, introduce attractive design and focus on the quality of workmanship to let you enjoy the choice of the Erkado doors.

We are committed to developing all business areas relevant for creating a product that meets your expectations. We achieve this goal by investing in technologically advanced production lines, staff training and systematic analysis of consumer needs. Our dynamic development would be impossible without the activity of the sales network participants.

Thank you for your inspiring suggestions and friendly feedback.









CONTENTS

STILE DOOF	RS			6
	MISKANT NEW	6	IRYS	32
	LAURENCJA		DAGLEZJA	
	SURMIA		FREZJA	
	BUDLEJA		DEBECJA	
	EPIMEDIUM		NEMEZJA NEW BERBERYS	40
	EWODIA		FLOKS	
	NOLINA		KROKUS	
	MAGNOLIA		KAMELIA	
	PODWOJNIK	24	PETUNIA	50
	JUKA BEST PRICE!		AZALIA	
	FORSYCJA BEST PRICE! LAWENDA BEST PRICE!		HIACYNTFRAGI NEW	
GRAF GLAS	S DOORS			58
	E PANELS NEW			
	D DOORS			
LACQUERE				
	UNO PREMIUM		MILDA NEW	
	MISKANT NEW		ANUBIS	
	NEMEZJA NEW		SYLENA	
	LAURENCJA NEW		3,22,0	7 0
	EW			
FLUSH DOO	RS			82
	UNO PREMIUM	82	LORIENT	92
	BALDUR		MENTON	
	ALTAMURA		SORANO	96
	ANSEDONIA	90		
INTERIOR F	RONT DOORS	•••••		98
	FORTECA RC2		FIXED AND ADJUSTABLE DOOR FRAME	
	FORTECA RC3		FOR THE HERSE SET SERIES	110
	FIXED DOOR FRAME FOR FORTECA		STEEL DOOR FRAMES	
	STEEL DOOR FRAMES FOR FORTECA NEW		FOR THE FORTECA HERSE SET SERIES	112
	HERSE SETHERSE MAX SET		UNITED STEEL DOOR FRAME NEW FOR THE HERSE SET SERIES	כוו
INTERIOR F	IRE PROTECTION FRONT DOORS			
	LEDA EI30	114	STEEL DOOR FRAMES FOR THE LEDA SERIES	116
	LEDA EI60	114	STEEL DOOR FRAMES FOR THE LEDA SERIES DOUBLE-LEAF LEDA EI30 & EI60 HYPERION EI30 RC2	117
	E – HANDLES NEW			
	INFORMATION			
DOOR FRAM	ME EXTENSION PANELS NEW	•••••		134
WALL-MOU	INTED SLIDING DOOR SYSTEMS NEW			135
POCKET SLI	DING DOOR SYSTEMS			141
DOUBLE-LE	AF DOORS			. 144
FOLDING DO	OORS			147
	NCEALED DOOR SYSTEM NEW			
LIGHTING		•••••		151
DOOR FRAM	MES			
	STEEL DOOR FRAME			157
	ADJUSTABLE DOOD FDAME FOR NON-DERATE	בח חחחםכ		17U 17U
	ADJUSTABLE DOOD EDAME FOR NON-DEBATE			



DECORS

COLOURS AVAILABLE FOR INTERIOR DOORS

GREKO, FINISH




GOLDEN GREKO OAK



GREKO WALNUT



SNOW-WHITE GREKO (similar to: RAL 9016, NCS S 0300-N)



WHITE GREKO (similar to: RAL 9010, NCS S 0502-Y50R)



GREKO OAK



WALNUT FINISH



GREKO ELM



MEDIUM GREKO OAK



ACACIA FINISH



GREKO GREY OAK



GREKO SONOMA



LIGHT ACACIA FINISH



SANREMO GREKO



GREKO WHITE PINE

PREMIUM



WALNUT PREMIUM



CONCRETE PREMIUM



GREY MAPLE PREMIUM




HORIZONTAL LARCH



OAK PREMIUM



GRAPHITE ASH PREMIUM



WHITE BARK PREMIUM



NATUR OAK PREMIUM



(similar to: RAL 9003, NCS S 0500-N)

CPL



OAK ST CPL







GREY PINE ST CPL



WHITE ST CPL*) (similar to: RAL 9003, NCS S 0500-N)

NEW

CAPPUCCINO ST CPL*) (similar to: RAL D2 080 80 05 NCS S3005-Y50R)

WHITE CPL 0.2 & 0.7 (similar to: RAL 9003, NCS S 0300-N)





LIGHT-GREY ST CPL*) (similar to: RAL 7037, NCS S 5500-N)

ASH-GEY CPL 0.2 & 0.7 (similar to: RAL 7047, NCS S 2500-N)



VENGE ST CPL



BLACK ST CPL*) (similar to: RAL 9011, NCS S 9000-N)



ANTHRACITE CPL 0.2 & 0.7 (similar to: RAL D2 000 35 00 NCS S7000-N)



0AK CPL 0.2 & 0.7 $^{*)}$

UV-PAINTED

WHITE TITANIUM UV (similar to: RAL 9003, NCS S 0500-N)

Read more on decors on p. 129



REBATED AND NON-REBATED







MISKANT 2, leaf laminate NATUR OAK PREMIUM, frame laminate BLACK ST CPL, handle BELLA slim black matt



MISKANT1



MISKANT 2



MISKANT 3



MISKANT 4



MISKANT 5



MISKANT 6





GREKO GREKO WALNUT GREKO ELM GREKO OAK GREKO GREY OAK GREKO SONOMA GREKO WHITE PINE MEDIUM GREKO OAK GOLDEN GREKO OAK SANREMO GREKO WHITE GREKO 1) SNOW-WHITE GREKO 1) **PREMIUM** WALNUT PREMIUM GREY MAPLE PREMIUM OAK PREMIUM GRAPHITE ASH PREMIUM WHITE BARK PREMIUM WHITE PREMIUM 1) NATUR OAK PREMIUM CPL VENGE ST CPL WHITE ST CPL 1) 4) OAK ST CPL GREY OAK ST CPI NEW GREY PINE ST CPL CAPPUCCINO ST CPL4) LIGHT-GREY ST CPL 4) BLACK ST CPL⁴⁾

Glulam wood stile for the PREMIUM and CPL laminates

without the AntiFinger coating

CONSTRUCTION

- rebated or non-rebated door leaf made in the STILE technology
- MDF board vertical stiles covered with the GREKO and CPL laminate with the AntiFInger coating and vertical glulam stiles covered with thin HDF panels and the PREMIUM or CPL laminate without the Anti-Finger coating NEW
- optionally, against an extra charge, upper panels extending the frame page 134 NEW

HARDWARE

- rebated door leaves: three silver 2-pin hinges adjusted horizontally
- three concealed hinges in a non-rebated leaf, silver (optionally black subject to an additional charge); hinges supplied with and included in the price of the door frame NEW
- deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, against an additional charge, a black, magnetic lock NEW

GLAZING

- toughened transparent or frosted glass with a thickness of 4 mm
- possibility to change the glazing side to REVERSE (OBVERSE standard alazina)
- black lines of 18 mm in width (thickness)

AVAILABLE SOLUTIONS (pp. 135-143)







AVAILABLE DOOR LEAF WIDTHS









ADDITIONAL CHARGES

ventilation cut

plastic woodgrain sleeves (4 pcs)

round and square metal sleeves (4 pcs); brushed nickel or patina finish in white or black

ventilation grille (only for door leaf widths of 80, 90, 100) 80, 90, 100

"100" rebated and non-rebated door leaf

metal hinge casings in the rebated door leaf (brushed nickel, patina, polished chrome, polished brass, white and black)

drop-down gasket 2)

can be replaced with a black magnetic lock for non-rebated door leaves

magnetic stop (buffer) 2) NEW (available in six colours p. 132)

factory-drilled openings for through-mounting applies to double-section handles in our offer 3) pages 120 to 127

STANDARD AWERS (OBVERSE) GLAZING



MADE TO ORDER "REVERSE" GLAZING



MDF stile for the GREKO and CPL

laminates with the AntiFinger coating

NEW 1) plain white laminate imitating a painted surface

²⁾ the stop prevents application of a drop-down gasket and vice versa


³⁾ applies only to the PREMIUM and ST CPL decors

⁴⁾ special AntiFinger coating to reduce dirt and fingerprints





LAURENCJA 1, PREMIUM WHITE laminate, black VSG glass, CUBE PREMIUM handle, black matt

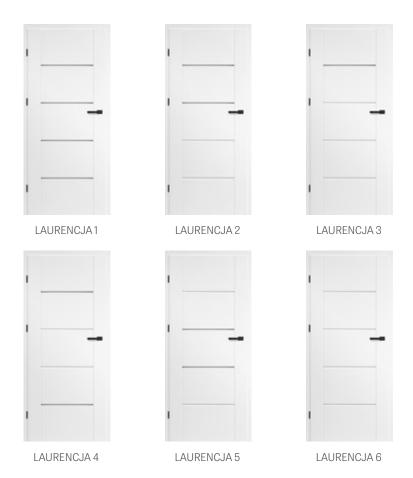



PREMIUI WALNUT PREMIUM GREY MAPLE PREMIUM OAK PREMIUM **GRAPHITE ASH** PRFMILIM NATUR OAK PREMIUM WHITE BARK PREMIUM WHITE PREMIUM 1) CPL







Glulam wood stile for the PREMIUM and CPL laminates without the AntiFinger coating

CONSTRUCTION

- rebated or non-rebated door leaf made in the STILE technology
- MDF board vertical stiles covered with the GREKO and CPL laminate with the AntiFInger coating and vertical glulam stiles covered with thin HDF panels and the PREMIUM or CPL laminate without the Anti-Finger coating NEW
- 4 mm thick HDF panels with CPL or PREMIUM laminate
- very wide crossbar 35 mm
- optionally, against an extra charge, upper panels extending the frame page 134 NEW


HARDWARE

- rebated door leaves: three silver 2-pin hinges adjusted
- three concealed hinges in a non-rebated leaf, silver (optionally black subject to an additional charge); hinges supplied with and included in the price of the door frame NEW
- deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, against an additional charge, a black, magnetic lock **NEW**

GLAZING

- tempered 4 mm glass, frosted or transparent as a standard and, against an additional charge, laminated VSG 221 safety glass frosted or black NEW plain on both sides
- possibility to change the glazing side to REVERSE (OBVERSE standard glazing)

AVAILABLE SOLUTIONS (pp. 135-143)







AVAILABLE DOOR LEAF WIDTHS









ADDITIONAL CHARGES

ventilation cut

plastic woodgrain sleeves (4 pcs)

round and square metal sleeves (4 pcs); brushed nickel or patina finish in white or black

ventilation grille (only for door leaf widths of 80, 90, 100) 80, 90, 100

"100" rebated and non-rebated door leaf

frosted or black VSG 221 laminated safety glass, NEW plain on both sides

metal hinge casings in rebated door leaf (colour: brushed nickel, patina, glossy chrome, glossy brass, white and

drop-down gasket 2)

can be replaced with a black magnetic lock for non-rebated door leaves

magnetic stop (buffer) 2) NEW (available in six colours p. 132)

factory-drilled openings for through-mounting applies to double-section handles in our offer - pages 120 to 127

¹⁾ plain white laminate imitating a painted surface

²⁾ the stop prevents application of a drop-down gasket and vice versa

³⁾ special AntiFinger coating to reduce dirt and fingerprints





SURMIA 1, WENGE ST CPL laminate, CUBE handle - bushed chrome, mat



SURMIA 2







O A TAMO



CONSTRUCTION

- rebated or non-rebated door leaf made in the STILE technology
- MDF board vertical stiles covered with the GREKO and CPL laminate with the AntiFInger coating and vertical glulam stiles covered with thin HDF panels and the PREMIUM or CPL laminate without the Anti-Finger coating NEW
- 22 mm and 4 mm thick HDF panels with CPL or PREMIUM finish
- 35 mm thick, very wide crossbar
- optionally, against an extra charge, upper panels extending the frame page 134 NEW


HARDWARE

- rebated door leaves: three silver 2-pin hinges adjusted
- three concealed hinges in a non-rebated leaf, silver (optionally black subject to an additional charge); hinges supplied with and included in the price of the door frame NEW
- deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, against an additional charge, a black, magnetic lock **NEW**

GLAZING

- · 4 mm frosted or transparent tempered glass as standard, and, against an additional charge, VSG 221 laminated safety glass, frosted, plain on hoth sides
- possibility to change the glazing side to REVERSE (OBVERSE standard glazing)

AVAILABLE SOLUTIONS (pp. 135-143)





AVAILABLE DOOR LEAF WIDTHS



ADDITIONAL CHARGES

ventilation cut

plastic woodgrain sleeves (4 pcs)

round and square metal sleeves (4 pcs); brushed nickel or patina finish in white or black

ventilation grille (only for door leaf widths of 80, 90, 100) 80, 90, 100

"100" rebated and non-rebated door leaf

frosted VSG 221 laminated safety glass, plain on both sides

metal hinge casings in rebated door leaf (colour: brushed nickel, patina, glossy chrome, glossy brass, white and

drop-down gasket 2)

black)

can be replaced with a black magnetic lock for non-rebated door leaves

magnetic stop (buffer) 2) NEW (available in six colours p. 132)

factory-drilled openings for through-mounting applies to double-section handles in our offer - pages 120 to 127 NEW



Presented model: SURMIA 1 in VENGE ST CPL finish with matt brushed chrome CUBE handle



CAPPUCCINO ST CPL3)



GREY PINE ST CPL



BLACK ST CPL 3)

LIGHT-GREY ST CPL3)

Glulam wood stile for the PREMIUM and CPL laminates without the AntiFinger coating

¹⁾ plain white laminate imitating a painted surface

²⁾ the stop prevents application of a drop-down gasket and vice versa

³⁾ special AntiFinger coating to reduce dirt and fingerprints





BUDLEJA 2, OAK ST CPL laminate, TOPAZ INOX handle



BUDLEJA1



BUDLEJA 2



BUDLEJA 3



BUDLEJA 4



BUDLEJA 5



BUDLEJA 6



BUDLEJA 7



BUDLEJA 8



WALNUT PREMIUM GREY MAPLE PREMIUM OAK PREMIUM GRAPHITE ASH PREMIUM NATUR OAK PREMIUM WHITE BARK PREMIUM WHITE PREMIUM WHITE PREMIUM





Presented model: BUDLEJA1 in OAK ST CPL finish with TOPAZ INOX handle



Glulam wood stile for the PREMIUM and CPL laminates without the AntiFinger coating

CONSTRUCTION

- · rebated or non-rebated door leaf made in the STILE technology
- MDF board vertical stiles covered with the GREKO and CPL laminate with the AntiFInger coating and vertical glulam stiles covered with thin HDF panels and the PREMIUM or CPL laminate without the Anti-Finger coating
- · very wide crossbar 35 mm
- optionally, against an extra charge, upper panels extending the frame page 134 NEW

HARDWARE

- rebated door leaves: three silver 2-pin hinges adjusted horizontally
- three concealed hinges in a non-rebated leaf, silver (optionally black-subject to an additional charge); hinges supplied with and included in the price of the door frame
- deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, against an additional charge, a black, magnetic lock


 NEW

GLAZING

- tempered 4 mm glass, frosted or transparent as a standard and, against an additional charge, laminated VSG 221 safety glass frosted or black

 NEW
 plain on both sides
- possibility to change the glazing side to REVERSE (OBVERSE standard glazing)

AVAILABLE SOLUTIONS (pp. 135-143)



AVAILABLE DOOR LEAF WIDTHS



ADDITIONAL CHARGES

ventilation cut

plastic woodgrain sleeves (4 pcs)

round and square metal sleeves (4 pcs); brushed nickel or patina finish in white or black

ventilation grille (only for door leaf widths of 80, 90, 100)

"100" rebated and non-rebated door leaf

frosted or black VSG 221 laminated safety glass, plain on both sides

metal hinge casings in rebated door leaf (colour: brushed nickel, patina, glossy chrome, glossy brass, white and black)

drop-down gasket 2)

can be replaced with a black magnetic lock for non-rebated door leaves

magnetic stop (buffer) 2) NEW (available in six colours p. 132)

factory-drilled openings for through-mounting applies to double-section handles in our offer - pages 120 to 127

 $^{^{\}mbox{\scriptsize 1)}}$ plain white laminate imitating a painted surface

 $^{^{2)}}$ the stop prevents application of a drop-down gasket and vice versa

³⁾ special AntiFinger coating to reduce dirt and fingerprints





EPIMEDIUM 4, laminate GRAFIT PREMIUM ASH, CUBE handle, brushed chrome, matt





EPIMEDIUM 1*)



EPIMEDIUM 2 *)



EPIMEDIUM 3 *)



EPIMEDIUM 4 *)



EPIMEDIUM 5 *)

WIDTH 70



EPIMEDIUM 1*)



EPIMEDIUM 2 *)



EPIMEDIUM 3 *)



EPIMEDIUM 4 *)



EPIMEDIUM 5 *)

The glazing to vertical bars ratio in the other width options differs considerably, whichcan be the key factor regarding the customer's product choice.

For the other width options go to www.erkado.pl

^{*)} The pictures show only the EPIMEDIUM doors with 80 and 70 cm wide leaves.



Presented model: EPIMEDIUM 1 in GRAPHITE PREMIUM finish brushed chrome CUBE handle with matt

GREKO





CAPPUCCINO ST CPL⁴⁾



GREY PINE ST CPL



BLACK ST CPL⁴⁾

LIGHT-GREY ST CPL 4)

MDF stile for the GREKO and CPL laminates with the AntiFinger coating NEW

CONSTRUCTION

- rebated or non-rebated door leaf made in the STILE technology
- MDF board vertical stiles covered with the GREKO and CPL laminate with the AntiFInger coating and vertical glulam stiles covered with thin HDF panels and the PREMIUM or CPL laminate without the Anti-Finger coating NEW
- 4 mm thick HDF panels with GREKO, CPL or PREMIUM finish
- narrow, long crossbar of 22 mm
- optionally, against an extra charge, upper panels extending the frame page 134 NEW

HARDWARE

- rebated door leaves: three silver 2-pin hinges adjusted
- three concealed hinges in a non-rebated leaf, silver (optionally black subject to an additional charge); hinges supplied with and included in the price of the door frame NEW
- deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, against an additional charge, a black, magnetic lock **NEW**

GLAZING

- 4 mm frosted or transparent tempered glass as standard, and, against an additional charge, VSG 221 laminated safety glass, frosted, plain on hoth sides
- possibility to change the glazing side to REVERSE (OBVERSE standard glazing)
- depending on the leaf width, the glazing widths differ. Check at www.erkado.pl

AVAILABLE SOLUTIONS (pp. 135-143)









AVAILABLE DOOR LEAF WIDTHS



ADDITIONAL CHARGES

ventilation cut

plastic woodgrain sleeves (4 pcs)

round and square metal sleeves (4 pcs); brushed nickel or patina finish in white or black

ventilation grille (only for door leaf widths of 80, 90, 100)

"100" rebated and non-rebated door leaf

frosted VSG 221 laminated safety glass, plain on both sides

metal hinge casings in the rebated door leaf (brushed nickel, patina, polished chrome, polished brass, white and black);

drop-down gasket 2)

can be replaced with a black magnetic lock for non-rebated door leaves

magnetic stop (buffer) 2) NEW (available in six colours p. 132)

factory-drilled openings for through-mounting applies to double-section handles in our offer 3) pages 120 to 127 NEW

Glulam wood stile for the PREMIUM and CPL laminates without the AntiFinger coating

¹⁾ plain white laminate imitating a painted surface

²⁾ the stop prevents application of a drop-down gasket and vice versa

³⁾ applies only to the PREMIUM and ST CPL decors

⁴⁾ special AntiFinger coating to reduce dirt and fingerprints





ARALIA 2, laminate WHITE PREMIUM BARK, handle RUMBA antibacterial, black







ARALIA 3



PREMIUM WALNUT PREMIUM GREY MAPLE PREMIUM OAK PREMIUM GRAPHITE ASH PREMIUM NATUR OAK PREMIUM WHITE BARK PREMIUM



Glulam timber stile for PREMIUM and CPL laminates

CONSTRUCTION

- · rebated or non-rebated door leaf made in the STILE technology
- timber stiles covered with thin HDF boards and with PREMIUM surface
- 16 mm thick HDF panels with PREMIUM finish (vertical grain direction)
- optionally, against an extra charge, upper panels extending the frame page 134

 NEW

HARDWARE


- rebated door leaves: three silver 2-pin hinges adjusted horizontally
- three concealed hinges in a non-rebated leaf, silver (optionally black-subject to an additional charge); hinges supplied with and included in the price of the door frame

 NEW
- deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, against an additional charge, a black, magnetic lock

GLAZING

- frosted decor mat glass 4 mm or custom-made frosted VSG 221 laminated safety glass, plain on both sides, against an additional charge
- possibility to change the glazing side to REVERSE (OBVERSE standard glazing)

AVAILABLE SOLUTIONS (pp. 135-143)



AVAILABLE DOOR LEAF WIDTHS



ADDITIONAL CHARGES

ventilation cut

plastic woodgrain sleeves (4 pcs)

round and square metal sleeves (4 pcs); brushed nickel or patina finish in white or black

ventilation grille (only for door leaf widths of 80, 90, 100)

"100" rebated and non-rebated door leaf

frosted VSG 221 laminated safety glass, plain on both sides


metal hinge casings in rebated door leaf (colour: brushed nickel, patina, glossy chrome, glossy brass, white and black)

drop-down gasket 1)

can be replaced with a black magnetic lock for non-rebated door leaves

magnetic stop (buffer) 1) NEW (available in six colours p. 132)

factory-drilled openings for through-mounting applies to double-section handles in our offer - pages 120 to 127 NEW







EWODIA 4, OAK PREMIUM laminate, round matt brushed chrome LUNA PREMIUM handle









EWODIA 1 EWODIA 2 EWODIA 3 EWODIA 4



PREMIUM









OAK PREMIUM

GRAPHITE ASH PREMIUM

NATUR OAK PREMIUM

WHITE BARK PREMIUM



Glulam timber stile for PREMIUM and CPL laminates

CONSTRUCTION

- rebated or non-rebated door leaf made in the STILE technology
- timber stiles covered with thin HDF boards and with PREMIUM surface
- 16 mm thick HDF panels with PREMIUM finish (vertical grain direction)
- optionally, against an extra charge, upper panels extending the frame page 134

 NEW

HARDWARE


- rebated door leaves: three silver 2-pin hinges adjusted horizontally
- three concealed hinges in a non-rebated leaf, silver (optionally black-subject to an additional charge); hinges supplied with and included in the price of the door frame

 NEW
- deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, against an additional charge, a black, magnetic lock

GLAZING

- frosted decor mat glass 4 mm or custom-made frosted VSG 221 laminated safety glass, plain on both sides, against an additional charge
- possibility to change the glazing side to REVERSE (OBVERSE standard glazing)

AVAILABLE SOLUTIONS (pp. 135-143)







AVAILABLE DOOR LEAF WIDTHS



ADDITIONAL CHARGES

ventilation cut

plastic woodgrain sleeves (4 pcs)

round and square metal sleeves (4 pcs); brushed nickel or patina finish in white or black

ventilation grille (only for door leaf widths of 80, 90, 100)

"100" rebated and non-rebated door leaf

frosted VSG 221 laminated safety glass, plain on both sides


metal hinge casings in rebated door leaf (colour: brushed nickel, patina, glossy chrome, glossy brass, white and black)

drop-down gasket 1)

can be replaced with a black magnetic lock for non-rebated door leaves

magnetic stop (buffer) 1) NEW (available in six colours p. 132)

factory-drilled openings for through-mounting applies to double-section handles in our offer - pages 120 to 127 NEW







NOLINA 1, laminate GREY PREMIUM MAPLE, TOPAZ INOX handle







2 NOLINA 3



PREMIUM WALNUT PREMIUM GREY MAPLE PREMIUM OAK PREMIUM GRAPHITE ASH PREMIUM NATUR OAK PREMIUM WHITE BARK PREMIUM



Glulam timber stile for PREMIUM and CPL laminates

CONSTRUCTION

- rebated or non-rebated door leaf made in the STILE technology
- timber stiles covered with thin HDF boards and with PREMIUM surface
- 16 mm thick HDF panels with PREMIUM finish (vertical grain direction)
- optionally, against an extra charge, upper panels extending the frame page 134

 NEW

HARDWARE


- rebated door leaves: three silver 2-pin hinges adjusted horizontally
- three concealed hinges in a non-rebated leaf, silver (optionally black-subject to an additional charge); hinges supplied with and included in the price of the door frame

 NEW
- deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, against an additional charge, a black, magnetic lock

GLAZING

- frosted decor mat glass 4 mm or custom-made frosted VSG 221 laminated safety glass, plain on both sides, against an additional charge
- possibility to change the glazing side to REVERSE (OBVERSE standard glazing)

AVAILABLE SOLUTIONS (pp. 135-143)



AVAILABLE DOOR LEAF WIDTHS



ADDITIONAL CHARGES

ventilation cut

plastic woodgrain sleeves (4 pcs)

round and square metal sleeves (4 pcs); brushed nickel or patina finish in white or black

ventilation grille (only for door leaf widths of 80, 90, 100)

"100" rebated and non-rebated door leaf

frosted VSG 221 laminated safety glass, plain on both sides


metal hinge casings in rebated door leaf (colour: brushed nickel, patina, glossy chrome, glossy brass, white and black)

drop-down gasket 1)

can be replaced with a black magnetic lock for non-rebated door leaves

magnetic stop (buffer) 1) NEW (available in six colours p. 132)

factory-drilled openings for through-mounting applies to double-section handles in our offer - pages 120 to 127 NEW







MAGNOLIA 1, laminate GREKO NUT; DECO handle



MAGNOLIA1



MAGNOLIA 2



MAGNOLIA 3



MAGNOLIA 4



MAGNOLIA 5



MAGNOLIA 6



MAGNOLIA 7



MAGNOLIA 8



CONSTRUCTION

- rebated or non-rebated door leaf made in the STILE technology
- MDF board vertical stiles covered with the GREKO and CPL laminate with the AntiFinger coating and vertical glulam stiles covered with thin HDF panels and the PREMIUM or CPL laminate without the Anti-Finger coating NEW
- 4 mm thick HDF panels with GREKO, CPL or PREMIUM finish
- optionally, against an extra charge, upper panels extending the frame page 134 NEW

HARDWARE

- rebated door leaves: three silver 2-pin hinges adjusted horizontally
- three concealed hinges in a non-rebated leaf, silver (optionally black subject to an additional charge); hinges supplied with and included in the price of the door frame NEW
- deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, against an additional charge, a black, magnetic

GLAZING

- tempered 4 mm glass, frosted or transparent as a standard and, against an additional charge, laminated VSG 221 safety glass frosted or black NEW plain on both sides
- possibility to change the glazing side to REVERSE (OBVERSE standard

AVAILABLE SOLUTIONS (pp. 135-143)

















ADDITIONAL CHARGES

ventilation cut

plastic woodgrain sleeves (4 pcs)

round and square metal sleeves (4 pcs); brushed nickel or patina finish in white or black

ventilation grille (only for door leaf widths of 80, 90, 100)

"100" rebated and non-rebated door leaf

frosted or black VSG 221 laminated safety glass, NEW plain on both sides

metal hinge casings in rebated door leaf (colour: brushed nickel, patina, glossy chrome, glossy brass, white and black)

drop-down gasket 2)

can be replaced with a black magnetic lock for non-rebated door leaves

magnetic stop (buffer) 2) NEW (available in six colours p. 132)

factory-drilled openings for through-mounting applies to double-section in our offer 3), pages 120 to 127



GREKO

GREKO WALNUT GREKO ELM GREKO OAK GREKO GREY OAK GREKO SONOMA GREKO WHITE PINE MEDIUM GREKO OAK GOLDEN GREKO OAK

SANREMO GREKO

Presented model: MAGNOLIA1in GREKO WALNUT finish with DECO handle

WHITE GREKO 1)

SNOW-WHITE GREKO 1)

PREMIUM



CPL WHITE ST CPL 1) 4) OAK ST CPL GREY OAK ST CPL VENGE ST CPL

CAPPUCCINO ST CPL⁴⁾




GREY PINE ST CPL



BLACK ST CPL 4)

LIGHT-GREY ST CPL⁴⁾



¹⁾ plain white laminate imitating a painted surface

with the AntiFinger coating NEW

²⁾ the stop prevents application of a drop-down gasket and vice versa

³⁾ applies only to the PREMIUM and ST CPL decors

⁴⁾ special AntiFinger coating to reduce dirt and fingerprints





PODWOJNIK 5, laminate GREY OAK ST CPL, TOPAZ INOX handle



PODWOJNIK1



PODWOJNIK 2



PODWOJNIK 3



PODWOJNIK 4



PODWOJNIK 5



CONSTRUCTION

- rebated or non-rebated door leaf made in the STILE technology
- MDF board vertical stiles covered with the GREKO and CPL laminate with the AntiFinger coating and vertical glulam stiles covered with thin HDF panels and the PREMIUM or CPL laminate without the Anti-Finger coating NEW
- 4 mm thick HDF panels with CPL or PREMIUM laminate
- central crossbars of 22 mm in thickness and a very wide upper and bottom crossbar of 35 mm
- optionally, against an additional charge, upper panels extending the frame - page 134 NEW


HARDWARE

- rebated door leaves: three silver 2-pin hinges adjusted horizontally
- three concealed hinges in a non-rebated leaf, silver (optionally black subject to an additional charge); hinges supplied with and included in the price of the door frame NEW
- deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, against an additional charge, a black, magnetic lock **NEW**

GLAZING

- · 4 mm frosted or transparent tempered glass as standard, and, against an additional charge, VSG 221 laminated safety glass, frosted, plain on
- possibility to change the glazing side to REVERSE (OBVERSE standard glazing)

AVAILABLE SOLUTIONS (pp. 135-143)



AVAILABLE DOOR LEAF WIDTHS



ADDITIONAL CHARGES

ventilation cut

plastic woodgrain sleeves (4 pcs)

round and square metal sleeves (4 pcs); brushed nickel or patina finish in white or black

ventilation grille (only for door leaf widths of 80, 90, 100)

"100" rebated and non-rebated door leaf

frosted VSG 221 laminated safety glass, plain on both sides

metal hinge casings in rebated door leaf (colour: brushed nickel, patina, glossy chrome, glossy brass, white and black)

drop-down gasket 2)

can be replaced with a black magnetic lock for non-rebated door leaves

magnetic stop (buffer) 2) NEW (available in six colours p. 132)

factory-drilled openings for through-mounting applies to double-section handles in our offer 3) pages 120 to 127





CAPPUCCINO ST CPL4)



GREY PINE ST CPL

Presented model: PODWOJNIK I, GREY OAK ST CPL laminate with a TOPAZ INOX handle



BLACK ST CPL⁴⁾

LIGHT-GREY ST CPL⁴⁾

Glulam wood stile for the PREMIUM and CPL laminates without the AntiFinger coating

¹⁾ plain white laminate imitating a painted surface

²⁾ the stop prevents application of a drop-down gasket and vice versa

³⁾ applies only to the PREMIUM and ST CPL decors

⁴⁾ special AntiFinger coating to reduce dirt and fingerprints





JUKA 4, laminate MEDIUM GREKO OAK, TOPAZ INOX handle



JUKA1



JUKA 2



JUKA 3



JUKA 4



JUKA 5



JUKA 6



JUKA 7



JUKA 8

Presented model: JUKA1 with MEDIUM GREKO OAK laminate and a TOPAZ INOX handle

1

CONSTRUCTION

- · rebated or non-rebated door leaf made in the STILE technology
- MDF board vertical stiles covered with the GREKO and CPL laminate with the AntiFinger coating and vertical glulam stiles covered with thin HDF panels and the PREMIUM or CPL laminate without the Anti-Finger coating
- 4 mm thick HDF panels with GREKO, CPL or PREMIUM finish
- optionally, against an additional charge, upper panels extending the frame - page 134

 NEW


HARDWARE

- rebated door leaves: three silver 2-pin hinges adjusted horizontally
- three concealed hinges in a non-rebated leaf, silver (optionally black-subject to an additional charge); hinges supplied with and included in the price of the door frame
- deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, against an additional charge, a black, magnetic lock

GLAZING

- tempered 4 mm glass, frosted or transparent as a standard and, against an additional charge, laminated VSG 221 safety glass frosted or black
 NEW
 plain on both sides
- possibility to change the glazing side to REVERSE (OBVERSE standard glazing)

AVAILABLE SOLUTIONS (pp. 135-143)



AVAILABLE DOOR LEAF WIDTHS



ADDITIONAL CHARGES

ventilation cut

plastic woodgrain sleeves (4 pcs)

round and square metal sleeves (4 pcs.); finish: brushed nickel, patina white and black

ventilation grille (only for door leaf widths of 80, 90, 100)

"100" rebated and non-rebated door leaf

frosted or black VSG 221 laminated safety glass, plain on both sides

metal hinge casings in the rebated door leaf (brushed nickel, patina, polished chrome, polished brass, white and black)

drop-down gasket 2)

can be replaced with a black magnetic lock for non-rebated door leaves


magnetic stop (buffer) 2) NEW (available in six colours p. 132)

factory-drilled openings for through-mounting applies to double-section handles in our offer ³⁾, pages 120 to 127 **NEW**





PREMIUM



MDF stile for the GREKO and CPL laminates



Glulam wood stile for the PREMIUM and CPL laminates without the AntiFinger coating

with the AntiFinger coating NEW

¹⁾ plain white laminate imitating a painted surface

²⁾ the stop prevents application of a drop-down gasket and vice versa

³⁾ applies only to the PREMIUM and ST CPL decors

⁴⁾ special AntiFinger coating to reduce dirt and fingerprints






FORSYCJA 1, door-leaf laminate WHITE GREKO, door-frame laminate OAK PREMIUM, handle: BELLA slim, black matt





GREKO GREKO WALNUT GREKO ELM GREKO OAK GREKO GREY OAK GREKO SONOMA GREKO WHITE PINE MEDIUM GREKO OAK GOLDEN GREKO OAK SANREMO GREKO WHITE GREKO 1) SNOW-WHITE GREKO 1) **PREMIUM**



MDF stile for the GREKO and CPL laminates with the AntiFinger coating NEW



Glulam wood stile for the PREMIUM and CPL laminates without the AntiFinger coating

CONSTRUCTION

- rebated or non-rebated door leaf made in the STILE technology
- MDF board vertical stiles covered with the GREKO and CPL laminate with the AntiFinger coating and vertical glulam stiles covered with thin HDF panels and the PREMIUM or CPL laminate without the Anti-Finger coating NEW
- 4 mm thick HDF panels with GREKO, CPL or PREMIUM finish
- optionally, against an additional charge, upper panels extending the frame - page 134 NEW

HARDWARE

- rebated door leaves: three silver 2-pin hinges adjusted horizontally
- three concealed hinges in a non-rebated leaf, silver (optionally black subject to an additional charge); hinges supplied with and included in the price of the door frame NEW
- deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, against an additional charge, a black, magnetic

GLAZING

- tempered 4 mm glass, frosted or transparent as a standard and, against an additional charge, laminated VSG 221 safety glass frosted or black NEW plain on both sides
- possibility to change the glazing side to REVERSE (OBVERSE standard

AVAILABLE SOLUTIONS (pp. 135-143)









AVAILABLE DOOR LEAF WIDTHS











ADDITIONAL CHARGES

ventilation cut

plastic woodgrain sleeves (4 pcs)

round and square metal sleeves (4 pcs); brushed nickel or patina finish in white or black

ventilation grille (only for door leaf widths of 80, 90, 100)

"100" rebated and non-rebated door leaf

frosted or black VSG 221 laminated safety glass, NEW plain on both sides

metal hinge casings in the rebated door leaf (brushed nickel, patina, polished chrome, polished brass, white and black)

drop-down gasket 2)

can be replaced with a black magnetic lock for non-rebated door leaves

magnetic stop (buffer) 2) NEW (available in six colours p. 132)

factory-drilled openings for through-mounting applies to double-section handles in our offer 3), pages 120 to 127 NEW



¹⁾ plain white laminate imitating a painted surface

²⁾ the stop prevents application of a drop-down gasket and vice versa

³⁾ applies only to the PREMIUM and ST CPL decors

⁴⁾ special AntiFinger coating to reduce dirt and fingerprints





LAWENDA 7, laminate GREKO OAK, DECO handle



LAWENDA1



LAWENDA 2



LAWENDA 3



LAWENDA 4



LAWENDA 5



LAWENDA 6



LAWENDA 7



LAWENDA 8



LAWENDA 9

0

Presented model: LAWENDA1 with GREKO OAK laminate and a DECO handle

CONSTRUCTION

- rebated or non-rebated door leaf made in the STILE technology
- MDF board vertical stiles covered with the GREKO and CPL laminate with the AntiFinger coating and vertical glulam stiles covered with thin HDF panels and the PREMIUM or CPL laminate without the Anti-Finger coating NEW
- 4 mm thick HDF panels with GREKO, CPL or PREMIUM laminate
- optionally, against an additional charge, upper panels extending the frame - page 134 NEW

HARDWARE

- rebated door leaves: three silver 2-pin hinges adjusted horizontally
- three concealed hinges in a non-rebated leaf, silver (optionally black subject to an additional charge); hinges supplied with and included in the price of the door frame NEW
- deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, against an additional charge, a black, magnetic

GLAZING

- tempered 4 mm glass, frosted or transparent as a standard and, against an additional charge, laminated VSG 221 safety glass frosted or black NEW plain on both sides
- possibility to change the glazing side to REVERSE (OBVERSE standard

AVAILABLE SOLUTIONS (pp. 135-143)









AVAILABLE DOOR LEAF WIDTHS











ventilation cut

plastic woodgrain sleeves (4 pcs)

ADDITIONAL CHARGES

round and square metal sleeves (4 pcs); brushed nickel or patina finish in white or black

ventilation grille (only for door leaf widths of 80, 90, 100)

"100" rebated and non-rebated door leaf

frosted or black VSG 221 laminated safety glass, NEW plain on both sides

metal hinge casings in the rebated door leaf (brushed nickel, patina, polished chrome, polished brass, white and black)

drop-down gasket 2)

can be replaced with a black magnetic lock for non-rebated door leaves


magnetic stop (buffer) 2) NEW (available in six colours p. 132)

factory-drilled openings for through-mounting applies to double-section handles in our offer 3), pages 120 to 127





PREMIUM



MDF stile for the GREKO and CPL laminates

CAPPUCCINO ST CPL⁴⁾



BLACK ST CPL⁴⁾

LIGHT-GREY ST CPL 4)

Glulam wood stile for the PREMIUM and CPL laminates without the AntiFinger coating

with the AntiFinger coating NEW

GREY PINE ST CPL

¹⁾ plain white laminate imitating a painted surface

²⁾ the stop prevents application of a drop-down gasket and vice versa


³⁾ applies only to the PREMIUM and ST CPL decors


⁴⁾ special AntiFinger coating to reduce dirt and fingerprints





WHITE PREMIUM Finish, black CUBE handle

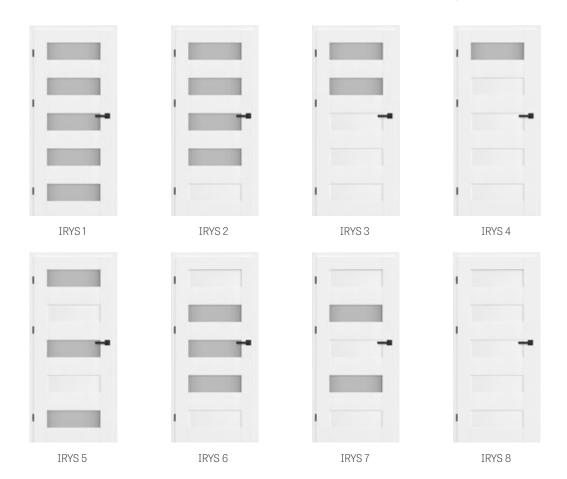

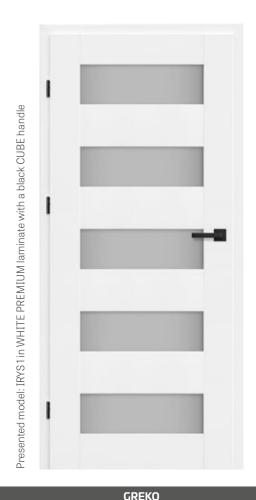

GREKO WALNUT GREKO ELM GREKO OAK GREKO GREY OAK GREKO SONOMA GREKO WHITE PINE MEDIUM GREKO OAK GOLDEN GREKO OAK SANREMO GREKO WHITE GREKO 1) SNOW-WHITE GREKO 1) **PREMIUM** WALNUT PREMIUM GREY MAPLE PREMIUM OAK PREMIUM GRAPHITE ASH PREMIUM WHITE BARK PREMIUM WHITE PREMIUM 1) NATUR OAK PREMIUM CPL WHITE ST CPL 1) 4) OAK ST CPI GREY OAK ST CPI VENGE ST CPI NEW GREY PINE ST CPL CAPPUCCINO ST CPL4) LIGHT-GREY ST CPL⁴⁾ BLACK ST CPL⁴⁾





Glulam wood stile for the PREMIUM and CPL laminates without the AntiFinger coating

with the AntiFinger coating NEW

CONSTRUCTION

- rebated or non-rebated door leaf made in the STILE technology
- MDF board vertical stiles covered with the GREKO and CPL laminate with the AntiFInger coating and vertical glulam stiles covered with thin HDF panels and the PREMIUM or CPL laminate without the Anti-Finger coating NEW
- 4 mm thick HDF panels with GREKO, CPL or PREMIUM laminate
- optionally, against an additional charge, upper panels extending the frame - page 134 NEW

HARDWARE

- rebated door leaves: three silver 2-pin hinges adjusted horizontally
- three concealed hinges in a non-rebated leaf, silver (optionally black subject to an additional charge); hinges supplied with and included in the price of the door frame NEW
- deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, against an additional charge, a black, magnetic

GLAZING

- · 4 mm frosted or transparent tempered glass as standard, and, against an additional charge, VSG 221 laminated safety glass, frosted, plain on
- possibility to change the glazing side to REVERSE (OBVERSE standard glazing)

AVAILABLE SOLUTIONS (pp. 135-143)







AVAILABLE DOOR LEAF WIDTHS









ADDITIONAL CHARGES

ventilation cut

plastic woodgrain sleeves (4 pcs)

round and square metal sleeves (4 pcs); brushed nickel or patina finish in white or black

ventilation grille (only for door leaf widths of 80, 90, 100)

"100" rebated and non-rebated door leaf

frosted VSG 221 laminated safety glass, plain on both sides

metal hinge casings in rebated door leaf

(colour: brushed nickel, patina, glossy chrome, glossy brass, white and black)

drop-down gasket 2)

can be replaced with a black magnetic lock for non-rebated door leaves

magnetic stop (buffer) 2) NEW (available in six colours p. 132)

factory-drilled openings for through-mounting applies to double-section handles in our offer 3), pages 120 to 127 NEW

¹⁾ plain white laminate imitating a painted surface

²⁾ the stop prevents application of a drop-down gasket and vice versa

³⁾ applies only to the PREMIUM and ST CPL decors

⁴⁾ special AntiFinger coating to reduce dirt and fingerprints





DAGLEZJA 1, laminate GREKO GREY OAK, CUBE SLIM handle, square, black matt



DAGLEZJA 1



DAGLEZJA 2



DAGLEZJA 3



DAGLEZJA 4



DAGLEZJA 5



DAGLEZJA 6



DAGLEZJA 7




DAGLEZJA 8




Presented model: DAGLESJA1in GREKO GREY OAK laminate

and a black matt chrome CUBE SLIM handle

GREKO



PREMIUM







MDF stile for the GREKO and CPL laminates with the AntiFinger coating NEW

Glulam wood stile for the PREMIUM and CPL laminates without the AntiFinger coating

CONSTRUCTION

- rebated or non-rebated door leaf made in the STILE technology
- MDF board vertical stiles covered with the GREKO and CPL laminate with the AntiFInger coating and vertical glulam stiles covered with thin HDF panels and the PREMIUM or CPL laminate without the Anti-Finger coating
- · 4 mm thick HDF panels with GREKO, CPL or PREMIUM laminate
- · very wide crossbar
- optionally, against an additional charge, upper panels extending the frame - page 134

 NEW


HARDWARE

- rebated door leaves: three silver 2-pin hinges adjusted horizontally
- three concealed hinges in a non-rebated leaf, silver (optionally black-subject to an additional charge); hinges supplied with and included in the price of the door frame
- deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, against an additional charge, a black, magnetic lock

GLAZING

- tempered 4 mm glass, frosted or transparent as a standard and, against an additional charge, laminated VSG 221 safety glass frosted or black
- possibility to change the glazing side to REVERSE (OBVERSE standard glazing)

AVAILABLE SOLUTIONS (pp. 135-143)



AVAILABLE DOOR LEAF WIDTHS



ADDITIONAL CHARGES

ventilation cut

plastic woodgrain sleeves (4 pcs)

round and square metal sleeves (4 pcs); brushed nickel or patina finish in white or black

ventilation grille (only for door leaf widths of 80, 90, 100) 80, 90, 100

"100" rebated and non-rebated door leaf

frosted or black VSG 221 laminated safety glass, plain on both sides

metal hinge casings in rebated door leaf (colour: brushed nickel, patina, glossy chrome, glossy brass, white and black)

drop-down gasket 2)

can be replaced with a black magnetic lock for non-rebated door leaves

magnetic stop (buffer) 2) NEW (available in six colours p. 132)

factory-drilled openings for through-mounting applies to double section handles in our offer ³⁾, pages 120 to 127 **NEW**

¹⁾ plain white laminate imitating a painted surface

²⁾ the stop prevents application of a drop-down gasket and vice versa

³⁾ applies only to the PREMIUM and ST CPL decors

⁴⁾ special AntiFinger coating to reduce dirt and fingerprints





FREZJA 5, laminate PINE ST CPL, black matt CUBE SLIM handle



FREZJA1



FREZJA 2



FREZJA 3



FREZJA 4



FREZJA 2



FREZJA 4



FREZJA 6



FREZJA 5



FREZJA 6



FREZJA 73)



FREZJA 8

ventilation cut

FREZJA 8

²⁾ FREZJA 8 - 8 mm thick glazing ³⁾ FREZJA 7 - with a mirror only and a selected finish on the other side. Obverse – a mirror fitted on the hinge side (as shown in the photo)

Presented model: FREZJA 1 with GREY PINE ST CPL laminate and a black matt CUBE SLIM handle

GREKO GREKO WALNUT GREKO ELM GREKO OAK GREKO GREY OAK GREKO SONOMA GREKO WHITE PINE MEDIUM GREKO OAK SNOW-WHITE GREKO 1) WHITE GREKO 1) **PREMIUM** GREY MAPLE PREMIUM OAK PREMIUM GRAPHITE ASH WALNUT PREMIUM PRFMILIM







Glulam wood stile for the PREMIUM and CPL laminates with the AntiFinger coating NEW without the AntiFinger coating

- 1) plain white laminate imitating a painted surface
- 2) not available in FREZJA 8
- 3) FREZJA 8 is not available for sliding systems
- 4) the stop prevents application of a drop-down gasket and vice versa
- $^{5)}$ applies only to the PREMIUM and ST CPL decors
- 6) special AntiFinger coating to reduce dirt and fingerprints

CONSTRUCTION

- rebated or non-rebated door leaf made in the STILE technology
- MDF board vertical stiles covered with the GREKO and CPL laminate with the AntiFInger coating and vertical glulam stiles covered with thin HDF panels and the PREMIUM or CPL laminate without the Anti-Finger coating NEW
- 16 mm thick HDF panels (also a 4 mm panel for the FREZJA 2 & 6 models) covered with the GREKO, CPL or PREMIUM laminate; FREZJA 7 is available with a mirror only
- optionally, against an additional charge, upper panels extending the frame - page 134 NEW

HARDWARE

- rebated door leaves: three silver 2-pin hinges adjusted horizontally
- three concealed hinges in a non-rebated leaf, silver (optionally black subject to an additional charge); hinges supplied with and included in the price of the door frame NEW
- deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, against an additional charge, a black, magnetic lock **NEW**

GLAZING

- · 4 mm frosted or transparent tempered glass or a mirror fitted on one side (only Freesia 7) as a standard and a VSG 221 frosted or black NEW safety glass, plain on both sides (does not apply to Freesia 7, 8)
- possibility to change the glazing side to REVERSE (OBVERSE standard glazing)
- fixed glazing widths: FREZJA 1-140 mm, FREESIAO 5 - 70 mm

AVAILABLE SOLUTIONS 3) (pp. 135-143)









AVAILABLE DOOR LEAF WIDTHS





ADDITIONAL CHARGES

ventilation cut

plastic woodgrain sleeves (4 pcs) 2)

round and square metal round and square metal slee ves 2) (4 pcs.); brushed nickel or patina finish white and black

ventilation grille²⁾ (only for door leaf widths of: 80, 90, 100

"100" rebated and non-rebated door leaf

frosted or black VSG 221 laminated safety glass, NEW plain on both sides

metal hinge casings in the rebated door leaf (brushed nickel, patina, polished chrome, polished brass, white and black)

drop-down gasket gasket 4) (not for FREZJA 8)

can be replaced with a black magnetic lock for non-rebated door leaves

magnetic stop (buffer) 4) NEW (available in six colours p. 132)

factory-drilled openings for through-mounting applies to double-section handles in our offer ⁵⁾, pages 120 to 127 **NEW**







DEBECJA 1, laminate CAPPUCCINO ST CPL, handle BELLA brass glossy



DEBECJA1



DEBECJA 2



DEBECJA 3



DEBECJA 4



DEBECJA 5




DEBECJA 6



DEBECJA 7



GREKO WALNUT GREKO ELM GREKO OAK GREKO GREY OAK GREKO SONOMA GREKO WHITE PINE MEDIUM GREKO OAK WHITE GREKO ® SNOW-WHITE GREKO ®







Glulam wood stile for the PREMIUM and CPL laminates without the Anti-Finger coating

CONSTRUCTION

- · rebated or non-rebated door leaf made in the STILE technology
- MDF board vertical stiles covered with the GREKO and CPL laminate with the AntiFInger coating and vertical glulam stiles covered with thin HDF panels and the PREMIUM or CPL laminate without the Anti-Finger coating
- · 4 mm thick HDF panels with GREKO, CPL or PREMIUM laminate
- · very wide crossbar
- optionally, against an additional charge, upper panels extending the frame - page 134

 NEW

HARDWARE

- rebated door leaves: three silver 2-pin hinges adjusted horizontally
- three concealed hinges in a non-rebated leaf, silver (optionally blacksubject to an additional charge); hinges supplied with and included in the price of the door frame

 NEW
- deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, against an additional charge, a black, magnetic lock

 NEW

GLAZING

- 4 mm frosted or transparent tempered glass as standard, and, against an additional charge, VSG 221 laminated safety glass, frosted, plain on both sides
- possibility to change the glazing side to REVERSE (OBVERSE standard glazing)

AVAILABLE SOLUTIONS (pp. 135-143)



AVAILABLE DOOR LEAF WIDTHS



ADDITIONAL CHARGES

ventilation cut

plastic woodgrain sleeves (4 pcs)

round and square metal sleeves (4 pcs); brushed nickel or patina finish in white or black

ventilation grille (only for door leaf widths of 80, 90, 100)

"100" rebated and non-rebated door leaf

frosted VSG 221 laminated safety glass, plain on both sides

metal hinge casings in rebated door leaf (colour: brushed nickel, patina, glossy chrome, glossy brass, white and black)

drop-down gasket 2)

can be replaced with a black magnetic lock for non-rebated door leaves

magnetic stop (buffer) 2) NEW (available in six colours p. 132)

factory-drilled openings for through-mounting applies to double-section handles in our offer ³⁾, pages 120 to 127 **NEW**

¹⁾ plain white laminate imitating a painted surface

²⁾ the stop prevents application of a drop-down gasket and vice versa


³⁾ applies only to the PREMIUM and ST CPL decors

⁴⁾ special AntiFinger coating to reduce dirt and fingerprints





NEMEZJA, round black matt CUBE PREMIUM handle

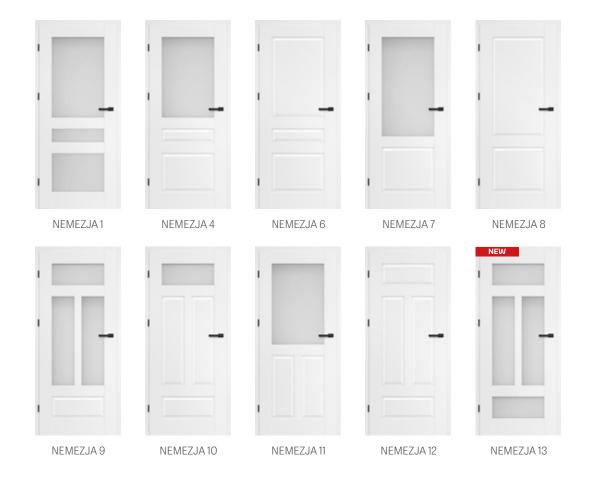

Presented model: NEMEZJA 6 with WHITE PREMIUM laminate and a black CUBE PREMIUM handle

GREKO GREKO WALNUT GREKO ELM GREKO OAK GREKO GREY OAK GREKO SONOMA GREKO WHITE PINE MEDIUM GREKO OAK WHITE GREKO 1) SNOW-WHITE GREKO 1) **PREMIUM** WALNUT PREMIUM GREY MAPLE PREMIUM OAK PREMIUM GRAPHITE ASH PREMIUM WHITE BARK PREMIUM WHITE PREMIUM 1) NATUR OAK PREMIUM CPL WHITE ST CPI 1) 4) OAK ST CPI GREY OAK ST CPI VENGE ST CPI NEW



CAPPUCCINO ST CPL4)



BLACK ST CPL⁴⁾

LIGHT-GREY ST CPL 4)

Glulam wood stile for the PREMIUM and CPL laminates without the AntiFinger coating

with the AntiFinger coating NEW

GREY PINE ST CPL

CONSTRUCTION

- · rebated or non-rebated door leaf made in the STILE technology
- MDF board vertical stiles covered with the GREKO and CPL laminate with the AntiFInger coating and vertical glulam stiles covered with thin HDF panels and the PREMIUM or CPL laminate without the AntiFinger coating

 NEW
- bevelled 16 mm thick HDF panels with a selection of GREKO, CPL or PREMIUM laminate
- optionally, against an additional charge, upper panels extending the frame - page 134

 NEW

HARDWARE

- rebated door leaves: three silver 2-pin hinges adjusted horizontally
- three concealed hinges in a non-rebated leaf, silver (optionally blacksubject to an additional charge); hinges supplied with and included in the price of the door frame

 NEW
- deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, against an additional charge, a black, magnetic lock

 NEW

GLAZING

- 4 mm frosted or transparent tempered glass as standard, and, against an additional charge, VSG 221 laminated safety glass, frosted, plain on both sides
- possibility to change the glazing side to REVERSE (OBVERSE standard glazing)

AVAILABLE SOLUTIONS (pp. 135-143)







AVAILABLE DOOR LEAF WIDTHS



ADDITIONAL CHARGES

ventilation cut

plastic woodgrain sleeves (4 pcs)

round and square metal sleeves (4 pcs); brushed nickel or patina finish in white or black

ventilation grille (only for door leaf widths of 80, 90, 100)

"100" rebated and non-rebated door leaf

frosted VSG 221 laminated safety glass, plain on both sides

metal hinge casings in the rebated door leaf (brushed nickel, patina, polished chrome, polished brass, white and black)

drop-down gasket 2)

can be replaced with a black magnetic lock for non-rebated door leaves

magnetic stop (buffer) 2) NEW (available in six colours p. 132)

factory-drilled openings for through-mounting applies to double-section handles in our offer, pages 120 to 127 **NEW**

¹⁾ plain white laminate imitating a painted surface

²⁾ the stop prevents application of a drop-down gasket and vice versa

³⁾ applies only to the PREMIUM and ST CPL decors

⁴⁾ special AntiFinger coating to reduce dirt and fingerprints





GRAPHITE ASH PREMIUM laminate, TOPAZ INOX handle



BERBERYS 1



BERBERYS 2



BERBERYS 3



BERBERYS 4



BERBERYS 5



BERBERYS 6



BERBERYS 7



BERBERYS 8

Presented model: BERBERYS1 with GRAPHITE ASH PREMIUM laminate and a TOPAZ INOX handle

1

CONSTRUCTION

- rebated or non-rebated door leaf made in the STILE technology
- MDF board vertical stiles covered with the GREKO and CPL laminate with the AntiFInger coating and vertical glulam stiles covered with thin HDF panels and the PREMIUM or CPL laminate without the Anti-Finger coating NEW
- 4 mm thick HDF panels with GREKO, CPL or PREMIUM laminate
- brushed aluminium insert profiles
- optionally, against an additional charge, upper panels extending the frame - page 134 NEW

HARDWARE

- rebated door leaves: three silver 2-pin hinges adjusted
- three concealed hinges in a non-rebated leaf, silver (optionally black subject to an additional charge); hinges supplied with and included in the price of the door frame NEW
- deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, against an additional charge, a black, magnetic lock **NEW**

GLAZING

- · 4 mm frosted or transparent tempered glass as standard, and, against an additional charge, VSG 221 laminated safety glass, frosted, plain on hoth sides
- possibility to change the glazing side to REVERSE (OBVERSE standard glazing)

AVAILABLE SOLUTIONS (pp. 135-143)







AVAILABLE DOOR LEAF WIDTHS



ADDITIONAL CHARGES

ventilation cut

plastic woodgrain sleeves (4 pcs)

round and square metal sleeves (4 pcs); brushed nickel or patina finish in white or black

ventilation grille (only for door leaf widths of 80, 90, 100)

"100" rebated and non-rebated door leaf

frosted VSG 221 laminated safety glass, plain on both sides

metal hinge casings in rebated door leaf

(colour: brushed nickel, patina, glossy chrome, glossy brass, white and black)

drop-down gasket 2)


can be replaced with a black magnetic lock for non-rebated door leaves

magnetic stop (buffer) 2) NEW (available in six colours p. 132)

factory-drilled openings for through-mounting applies to double-section handles in our offer 3), pages 120 to 127








MDF stile for the GREKO and CPL laminates





with the AntiFinger coating NEW 1) plain white laminate imitating a painted surface

²⁾ the stop prevents application of a drop-down gasket and vice versa

³⁾ applies only to the PREMIUM and ST CPL decors

⁴⁾ special AntiFinger coating to reduce dirt and fingerprints





FLOKS 8, laminate OAK ST CPL, brushed chrome CUBE handle, matt







FLOKS 2



FLOKS 3



FLOKS 4



FLOKS 5



FLOKS 6



FLOKS 7



FLOKS 8

Presented model: FLOKS I in OAK ST CPL finish with matt brushed chrome CUBE handle

GREKO GREKO WALNUT GREKO ELM GREKO OAK GREKO GREY OAK



GREY MAPLE PREMIUM

PREMIUM



WALNUT PREMIUM



WHITE PREMIUM 1)

GOLDEN GREKO OAK







MDF stile for the GREKO and CPL laminates with the AntiFinger coating NEW

Glulam wood stile for the PREMIUM and CPL laminates without the AntiFinger coating

CONSTRUCTION

- · rebated or non-rebated door leaf made in the STILE technology
- MDF board vertical stiles covered with the GREKO and CPL laminate with the AntiFInger coating and vertical glulam stiles covered with thin HDF panels and the PREMIUM or CPL laminate without the AntiFinger coating

 NEW
- 4 mm thick HDF panels with GREKO, CPL or PREMIUM laminate
- · brushed aluminium insert profiles
- optionally, against an additional charge, upper panels extending the frame - page 134

 NEW

HARDWARE

- rebated door leaves: three silver 2-pin hinges adjusted horizontally
- three concealed hinges in a non-rebated leaf, silver (optionally blacksubject to an additional charge); hinges supplied with and included in the price of the door frame


 NEW
- deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, against an additional charge, a black, magnetic lock

 NEW

GLAZING

- tempered 4 mm glass, frosted or transparent as a standard and, against an additional charge, laminated VSG 221 safety glass frosted or black
- possibility to change the glazing side to REVERSE (OBVERSE standard glazing)

AVAILABLE SOLUTIONS (pp. 135-143)



AVAILABLE DOOR LEAF WIDTHS



ADDITIONAL CHARGES

ventilation cut

plastic woodgrain sleeves (4 pcs)

round and square metal sleeves (4 pcs); brushed nickel or patina finish in white or black

ventilation grille (only for door leaf widths of 80, 90, 100)

"100" rebated and non-rebated door leaf

frosted or black VSG 221 laminated safety glass, plain on both sides

lain on both sides

metal hinge casings in rebated door leaf (colour: brushed nickel, patina, glossy chrome, glossy brass, white and

drop-down gasket 2)

can be replaced with a black magnetic lock for non-rebated door leaves

magnetic stop (buffer) 2) NEW (available in six colours p. 132)

factory-drilled openings for through-mounting applies to double-section handles in our offer ³⁾, pages 120 to 127 **NEW**


¹⁾ plain white laminate imitating a painted surface

²⁾ the stop prevents application of a drop-down gasket and vice versa

³⁾ applies only to the PREMIUM and ST CPL decors

⁴⁾ special AntiFinger coating to reduce dirt and fingerprints



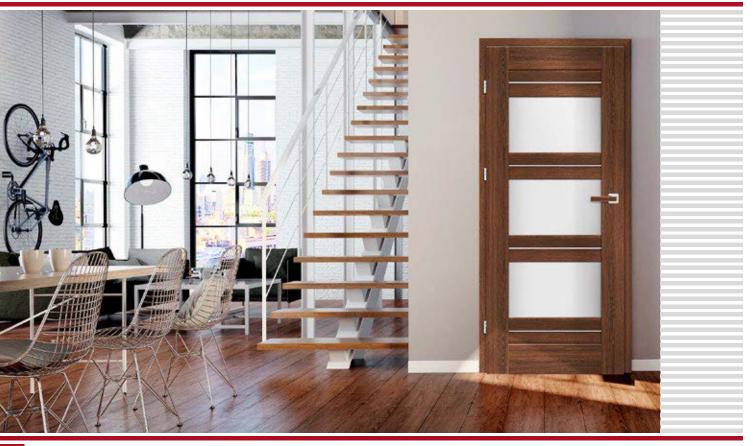

KROKUS 1, laminate GREKO WALNT, DECO handle



KROKUS1



KROKUS 2



KROKUS 3



KROKUS 4



KROKUS 5




KROKUS 6



GREKO



PREMIUM



CAPPUCCINO ST CPL4)

GREY PINE ST CPL



BLACK ST CPL⁴⁾

LIGHT-GREY ST CPL 4)

MDF stile for the GREKO and CPL laminates with the AntiFinger coating

Glulam wood stile for the PREMIUM and CPL laminates without the AntiFinger coating

CONSTRUCTION

- · rebated or non-rebated door leaf made in the STILE technology
- MDF board vertical stiles covered with the GREKO and CPL laminate with the AntiFInger coating and vertical glulam stiles covered with thin HDF panels and the PREMIUM or CPL laminate without the AntiFinger coating

 NEW
- 4 mm thick HDF panels with GREKO, CPL or PREMIUM laminate
- · brushed aluminium insert profiles
- optionally, against an additional charge, upper panels extending the frame - page 134

 NEW

HARDWARE


- rebated door leaves: three silver 2-pin hinges adjusted horizontally
- three concealed hinges in a non-rebated leaf, silver (optionally black-subject to an additional charge); hinges supplied with and included in the price of the door frame
- deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, against an additional charge, a black, magnetic lock

 NEW

GLAZING

- 4 mm frosted or transparent tempered glass as standard, and, against an additional charge, VSG 221 laminated safety glass, frosted, plain on both sides
- possibility to change the glazing side to REVERSE (OBVERSE standard glazing)

AVAILABLE SOLUTIONS (pp. 135-143)



AVAILABLE DOOR LEAF WIDTHS



ADDITIONAL CHARGES

ventilation cut

plastic woodgrain sleeves (4 pcs)

round and square metal sleeves (4 pcs); brushed nickel or patina finish in white or black

ventilation grille (only for door leaf widths of 80, 90, 100)

"100" rebated and non-rebated door leaf

frosted VSG 221 laminated safety glass, plain on both sides

metal hinge casings in rebated door leaf (colour: brushed nickel, patina, glossy chrome, glossy brass, white and black)

drop-down gasket 2)

can be replaced with a black magnetic lock for non-rebated door leaves

magnetic stop (buffer) 2) NEW (available in six colours p. 132)

factory-drilled openings for through-mounting applies to double-section handles in our offer ³⁾, pages 120 to 127 **NEW**

¹⁾ plain white laminate imitating a painted surface

²⁾ the stop prevents application of a drop-down gasket and vice versa

³⁾ applies only to the PREMIUM and ST CPL decors

⁴⁾ special AntiFinger coating to reduce dirt and fingerprints





KAMELIA 1, laminate GRAPHITE PREMIUM ASH, brushed chrome CUBE handle, matt



KAMELIA1



KAMELIA 2



KAMELIA 3



KAMELIA 4



KAMELIA 5



KAMELIA 6



KAMELIA 7



KAMELIA 8



Presented model: KAMELIA 1 with GRAPHITE ASH PREMIUM laminate and a brushed chrome CUBE handle, matt

GREKO GREKO WALNUT GREKO ELM GREKO OAK GREKO GREY OAK GREKO SONOMA GREKO WHITE PINE MEDIUM GREKO OAK GOLDEN GREKO OAK SANREMO GREKO WHITE GREKO 1) SNOW-WHITE GREKO 1) **PREMIUM** WALNUT PREMIUM GREY MAPLE PREMIUM OAK PREMIUM GRAPHITE ASH PRFMIIIM NATUR OAK PREMIUM WHITE BARK PREMIUM WHITE PREMIUM 1) **CPL** WHITE ST CPL 1) 4) OAK ST CPL GREY OAK ST CPL VENGE ST CPL GREY PINE ST CPL CAPPUCCINO ST CPL⁴⁾ LIGHT-GREY ST CPL 4) BLACK ST CPL⁴⁾





Glulam wood stile for the PREMIUM and CPL laminates without the AntiFinger coating

¹⁾ plain white laminate imitating a painted surface

CONSTRUCTION

- rebated or non-rebated door leaf made in the STILE technology
- MDF board vertical stiles covered with the GREKO and CPL laminate with the AntiFInger coating and vertical glulam stiles covered with thin HDF panels and the PREMIUM or CPL laminate without the AntiFinger coating

 NEW
- · 4 mm thick HDF panels with GREKO, CPL or PREMIUM laminate
- optionally, against an additional charge, upper panels extending the frame - page 134

 NEW

HARDWARE


- rebated door leaves: three silver 2-pin hinges adjusted horizontally
- three concealed hinges in a non-rebated leaf, silver (optionally black-subject to an additional charge); hinges supplied with and included in the price of the door frame
- deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, against an additional charge, a black, magnetic lock

GLAZING

- 4 mm frosted or transparent tempered glass as standard, and, against an additional charge, VSG 221 laminated safety glass, frosted, plain on both sides
- possibility to change the glazing side to REVERSE (OBVERSE standard glazing)

AVAILABLE SOLUTIONS (pp. 135-143)







AVAILABLE DOOR LEAF WIDTHS









ADDITIONAL CHARGES

ventilation cut

plastic woodgrain sleeves (4 pcs)

round and square metal sleeves (4 pcs); brushed nickel or patina finish in white or black

ventilation grille (only for door leaf widths of 80, 90, 100)

"100" rebated and non-rebated door leaf

frosted VSG 221 laminated safety glass, plain on both sides

metal hinge casings in rebated door leaf (colour: brushed nickel, patina, glossy chrome, glossy brass, white and black)

drop-down gasket 2)

can be replaced with a black magnetic lock for non-rebated door leaves $\,$

magnetic stop (buffer) 2) NEW (available in six colours p. 132)

factory-drilled openings for through-mounting applies to double-section handles in our offer $^{3)}$, pages 120 to 127 $$\tt NEW$$

²⁾ the stop prevents application of a drop-down gasket and vice versa

³⁾ applies only to the PREMIUM and ST CPL decors

⁴⁾ special AntiFinger coating to reduce dirt and fingerprints





PETUNIA 1, laminate OAK PREMIUM, TOPAZ INOX handle



PETUNIA1



PETUNIA 2



PETUNIA 3



PETUNIA 4



PETUNIA 5



PETUNIA 6



PETUNIA 7



PETUNIA 8



GREKO



PREMIUM



CAPPUCCINO ST CPL4)



GREY PINE ST CPL



BLACK ST CPL⁴⁾

LIGHT-GREY ST CPL⁴⁾

MDF stile for the GREKO and CPL laminates with the AntiFinger coating NEW

Glulam wood stile for the PREMIUM and CPL laminates without the AntiFinger coating

- 1) plain white laminate imitating a painted surface
- 2) the stop prevents application of a drop-down gasket and vice versa
- 3) applies only to the PREMIUM and ST CPL decors
- ⁴⁾ special AntiFinger coating to reduce dirt and fingerprints

CONSTRUCTION

- rebated or non-rebated door leaf made in the STILE technology
- MDF board vertical stiles covered with the GREKO and CPL laminate with the AntiFInger coating and vertical glulam stiles covered with thin HDF panels and the PREMIUM or CPL laminate without the AntiFinger coating

 NEW
- · 4 mm thick HDF panels with GREKO, CPL or PREMIUM laminate
- optionally, against an additional charge, upper panels extending the frame - page 134

 NEW

HARDWARE

- rebated door leaves: three silver 2-pin hinges adjusted horizontally
- three concealed hinges in a non-rebated leaf, silver (optionally blacksubject to an additional charge); hinges supplied with and included in the price of the door frame


 NEW
- deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, against an additional charge, a black, magnetic lock

 NEW

GLAZING

- 4 mm frosted or transparent tempered glass as standard, and, against an additional charge, VSG 221 laminated safety glass, frosted, plain on both sides
- possibility to change the glazing side to REVERSE (OBVERSE standard glazing)

AVAILABLE SOLUTIONS (pp. 135-143)



AVAILABLE DOOR LEAF WIDTHS



ADDITIONAL CHARGES

ventilation cut

plastic woodgrain sleeves (4 pcs)

round and square metal sleeves (4 pcs); brushed nickel or patina finish in white or black

ventilation grille (only for door leaf widths of 80, 90, 100)

"100" rebated and non-rebated door leaf

frosted VSG 221 laminated safety glass, plain on both sides

metal hinge casings in rebated door leaf

(colour: brushed nickel, patina, glossy chrome, glossy brass, white and black) $\,$

drop-down gasket 2)

can be replaced with a black magnetic lock for non-rebated door leaves

magnetic stop (buffer) 2) **NEW** (available in six colours p. 132)

factory-drilled openings for through-mounting applies to double-section handles in our offer ³⁾, pages 120 to 127 **NEW**





AZALIA 1, laminate OAK ST CPL, CUBE handle - bushed chrome, matt



AZALIA1



AZALIA 2



AZALIA 3



AZALIA 4



AZALIA 5



AZALIA 6



AZALIA 7



AZALIA 8


Presented model: AZALIA1 with OAK ST CPL laminate and a brushed chrome CUBE handle, matt

1

GREKO



PREMIUM



CAPPUCCINO ST CPL4)



GREY PINE ST CPL



BLACK ST CPL⁴⁾

MDF stile for the GREKO and CPL laminates with the AntiFinger coating NEW

Glulam wood stile for the PREMIUM and CPL laminates without the AntiFinger coating

CONSTRUCTION

- rebated or non-rebated door leaf made in the STILE technology
- MDF board vertical stiles covered with the GREKO and CPL laminate with the AntiFInger coating and vertical glulam stiles covered with thin HDF panels and the PREMIUM or CPL laminate without the Anti-Finger coating NEW
- 4 mm thick HDF panels with GREKO, CPL or PREMIUM laminate
- optionally, against an additional charge, upper panels extending the frame - page 134 NEW

HARDWARE

- rebated door leaves: three silver 2-pin hinges adjusted horizontally
- three concealed hinges in a non-rebated leaf, silver (optionally black subject to an additional charge); hinges supplied with and included in the price of the door frame NEW
- deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, against an additional charge, a black, magnetic

GLAZING

- · 4 mm frosted or transparent tempered glass as standard, and, against an additional charge, VSG 221 laminated safety glass, frosted, plain on
- possibility to change the glazing side to REVERSE (OBVERSE standard glazing)

AVAILABLE SOLUTIONS (pp. 135-143)







AVAILABLE DOOR LEAF WIDTHS









ADDITIONAL CHARGES

ventilation cut

plastic woodgrain sleeves (4 pcs)

round and square metal sleeves (4 pcs); brushed nickel or patina finish in white or black

ventilation grille (only for door leaf widths of 80, 90, 100)

"100" rebated and non-rebated door leaf

frosted VSG 221 laminated safety glass, plain on both sides

metal hinge casings in rebated door leaf (colour: brushed nickel, patina, glossy chrome, glossy brass, white and black)

drop-down gasket 2)

can be replaced with a black magnetic lock for non-rebated door leaves

magnetic stop (buffer) 2) NEW (available in six colours p. 132)

factory-drilled openings for through-mounting applies to double-section handles in our offer 3), pages 120 to 127 NEW

¹⁾ plain white laminate imitating a painted surface

²⁾ the stop prevents application of a drop-down gasket and vice versa

³⁾ applies only to the PREMIUM and ST CPL decors

⁴⁾ special AntiFinger coating to reduce dirt and fingerprints





HIACYNT 6, laminate MEDIUM GREKO OAK, TOPAZ INOX handle



HIACYNT1



HIACYNT 2



HIACYNT 3



HIACYNT 4



HIACYNT 5



HIACYNT 6



HIACYNT 7




HIACYNT 8

Presented model: HIACYNT1 with MEDIUM GREKO OAK laminate and a TOPAZ INOX handle 1

GREKO



PREMIUM



CAPPUCCINO ST CPL⁴⁾

GREY PINE ST CPL



BLACK ST CPL⁴⁾

MDF stile for the GREKO and CPL laminates with the AntiFinger coating NEW

Glulam wood stile for the PREMIUM and CPL laminates without the AntiFinger coating

CONSTRUCTION

- rebated or non-rebated door leaf made in the STILE technology
- MDF board vertical stiles covered with the GREKO and CPL laminate with the AntiFInger coating and vertical glulam stiles covered with thin HDF panels and the PREMIUM or CPL laminate without the Anti-Finger coating NEW
- 22mm thick HDF panels with GREKO, CPL or PREMIUM laminate
- optionally, against an additional charge, upper panels extending the frame - page 134 NEW


HARDWARE

- rebated door leaves: three silver 2-pin hinges adjusted horizontally
- three concealed hinges in a non-rebated leaf, silver (optionally black subject to an additional charge); hinges supplied with and included in the price of the door frame NEW
- deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, against an additional charge, a black, magnetic

GLAZING

- · 4 mm frosted or transparent tempered glass as standard, and, against an additional charge, VSG 221 laminated safety glass, frosted, plain on
- possibility to change the glazing side to REVERSE (OBVERSE standard glazing)

AVAILABLE SOLUTIONS (pp. 135-143)



AVAILABLE DOOR LEAF WIDTHS



ADDITIONAL CHARGES

ventilation cut

plastic woodgrain sleeves (4 pcs)

round and square metal sleeves (4 pcs); brushed nickel or patina finish in white or black

ventilation grille (only for door leaf widths of 80, 90, 100)

"100" rebated and non-rebated door leaf

frosted VSG 221 laminated safety glass, plain on both sides

metal hinge casings in the rebated door leaf (brushed nickel, patina, polished chrome, polished brass, white and black)

drop-down gasket 2)

can be replaced with a black magnetic lock for non-rebated door leaves

magnetic stop (buffer) 2) NEW (available in six colours p. 132)

factory-drilled openings for through-mounting applies to double section handles in our offer 3), pages 120 to 127

¹⁾ plain white laminate imitating a painted surface

²⁾ the stop prevents application of a drop-down gasket and vice versa

³⁾ applies only to the PREMIUM and ST CPL decors

⁴⁾ special AntiFinger coating to reduce dirt and fingerprints



REBATED INTERIOR STILE DOORS



WHITE ST CPL Finish, black matt CUBE handle, black VSG glass



FRAGI1



FRAGI 4 DECORMAT



FRAGI 5 TRANSPARENT



FRAGI 7 DECORMAT GRAFIT



FRAGI 9



FRAGI 10




FRAGI 15 Frosted VSG/ESG



FRAGI 16 Black VSG/ESG



GREKO GREKO WALNUT GREKO ELM GREKO OAK GREKO GREY OAK GREKO SONOMA GREKO WHITE PINE MEDIUM GREKO OAK GOLDEN GREKO OAK SNOW-WHITE GREKO 1) SANREMO GREKO WHITE GREKO 1) **PREMIUM** GRAPHITE ASH WALNUT PREMIUM GREY MAPLE PREMIUM OAK PREMIUM PRFMILIM







Glulam wood stile for the PREMIUM and CPL laminates without the AntiFinger coating

CONSTRUCTION

- rebated door leaf made in STILE technology
- MDF board vertical stiles covered with the GREKO and CPL laminate with the AntiFInger coating and vertical glulam stiles covered with thin HDF panels and the PREMIUM or CPL laminate without the Anti-Finger coating NEW
- optionally, against an additional charge, upper panels extending the frame - page 134 NEW

HARDWARE

- rebated door leaves: three silver 2-pin hinges adjusted horizontally
- a deadbolt lock, euro profile cylinder, economy lock or with a thumb turn

GLAZING

- · 8 mm tempered or tempered and VSG/ESG 441 laminated safety glass, frosted or black NEW , plain on both sides (for Fragi 15 & Fragi 16
- possibility to change the glazing side to REVERSE (OBVERSE standard glazing)

AVAILABLE SOLUTIONS (pp. 144-146)



AVAILABLE DOOR LEAF WIDTHS









ADDITIONAL CHARGES

ventilation cut

metal hinge casings in rebated door leaf

(colour: brushed nickel, patina, glossy chrome, glossy brass, white and


factory-drilled openings for through-mounting applies to double-section handles in our offer 2), pages 120 to 127

magnetic stop (buffer) NEW (available in six colours p. 132)


Note:

The picture shows only an 80cm-wide door leaf. The proportion in the picture differ slightly for the other FRAGI 1 model widths. For further details and photos go to our website: www.erkado.pl

STANDARD "OBVERSE" GLAZING



"REVERSE" GLAZING MADE TO ORDER



¹⁾ plain white laminate imitating a painted surface

²⁾ applies only to the PREMIUM and ST CPL decors

³⁾ special AntiFinger coating to reduce dirt and fingerprints



GRAF GLASS DOORS

INTERIOR GLASS DOORS



























CONSTRUCTION

- 8 mm tempered glass, 8 mm tinted glass (GRAF 26)
- possibility to change the glazing side to REVERSE (OBVERSE standard glazing)
- frosted glass with black or white painted decorative patterns
- the line width (thickness) of the GRAF 1, 6, 17, 35, 36, 38 models is 30 mm
- optionally, against an additional charge, upper panels extending the frame - page 134

 NEW

FIXED AND ADJUSTABLE FRAMES

- for prices of fixed and adjustable frames for rebated doors go to pp. 161-163
- · no electric strike possible
- 10 mm pin hinge for glass panes frames
- ONLY REBATED FRAMES IN ALL AVAILABLE DECORS, STEEL FRAMES AND THE WHITE PAINTED TITANIUM UV FRAME ARE AVAILABLE FOR GLASS GRAF DOORS

NOTE: For the extended Glass Door Collection and a variety of available models go to our website: www.erkado.pl. You can also order the available models through the B2B panel.

See more at www.erkado.pl



AVAILABLE DOOR LEAF WIDTHS



ADDITIONAL CHARGES

"90" door leaf

ventilation cut





WALL-MOUNTED



Decorative panel: decorative strip OAK STC PL, adapter BLACK ST CPL, skirting board OAK ST CPL, door BALDUR 3 OAK ST CPL, black VSG glass

Decorative panels are mounted on the wall as a decorative element and at the same time improve the acoustics in the room.

Mounting is possible in several ways - the decorative skirting board can be mounted to the wall by means of a mounting strip only or with the use of adapters which constitute a base for the panels.

Decorative panels are available in the PREMIUM and ST CPL laminates, which can be put together in combinations of your choice.



composition of decorative panels with the skirting board OAK ST CPL



components of the decorative panel

DECORATIVE STRIP MOUNTING END STRIP 10 13 15.4 Space for mounting strip ADAPTER 28 169.7 182.7 LAMINATE

decorative strip mounting strip adapter end strip Top view wall

DECORATIVE PANEL



The individual elements of the decorative panel system are commercially available in a length of 2750 mm, however each product has a production length of 28 00 mmm and is delivered in this length, where 25 mm per side is a margin for free trimming before installation and also a reserve in case of transport damage.

The wall panels can also be mounted without an adapter directly to the wall using only a mounting strip on which we mount the decorative strip.


adapter - quantity in pack 1 piece end strip - package quantity 1 piece decorative strip + mounting strip - pack of 3 sets



SKIRTING BOARDS

SKIRTING BOARD

- · length: 2.40 running metres.
- the skirting board is made of moisture resistant MDF board. Available variants: WHITE TITANIUM UV paint, laminates: GREKO, ST CPL, PREMIUM and in base laminate to be paint coated.
- · fitting method: bonding to wall



¹⁾ plain white laminate imitating a painted surface

²⁾ special AntiFinger coating to reduce dirt and fingerprints



REBATED, NON-REBATED AND REVERSE PAINTED DOORS



Presented model: UNO PREMIUM with black matt CUBE handle










PAINTED



AVAILABLE SOLUTIONS (pp. 135-143)



AVAILABLE DOOR LEAF WIDTHS



CONSTRUCTION

- · rebated, non-rebated or reverse door leaf
- internal timber stile (sides and top, bottom -MDF) covered with two HDF boards
- honeycomb stabilising filling or solid core filling against an additional charge
- optionally, against an additional charge, upper panels extending the frame - page 134

 NEW

FINISHING

- door leaves and door frames coated with water-based UV hardened varnish for high resistance to adverse use conditions
- · door leaf edge made in standard technology

HARDWARE

- · three pin mortise hinges in a rebated door leaf
- three concealed hinges in the non-adjacent leaf and two hinges in the reverse leaf in silver (black against an extra charge); hinges are supplied and priced with the door frame

 NEW
- a deadbolt lock in the rebated door leaf and a key-locked magnetic lock in the non-rebated and reverse door leaves, thumb turn cylinder, economy or silver with a blockade or, optionally, against an additional charge, a black magnetic lock

ADDITIONAL CHARGES

reverse door leaf NEW

solid core filling

ventilation cut

"100" rebated and non-rebated door leaf

additional bottom rail (can be cut by customer up to max 8 cm)

metal hinge casings in the rebated door leaf (brushed nickel, patina, polished chrome, polished brass, white and black)

drop-down gasket 1)

can be replaced with a black magnetic lock for non-rebated and reverse leaves

magnetic stop (buffer) 1) NEW (available in six colours p. 132)

stainless steel porthole: "chrome" polished or "satine" brushed; frosted decormat glass, non-tinted glass; porthole ID 235 mm; external 350 mm)








REBATED, NON-REBATED PAINTED DOORS



TURAN 4, black matt CUBE handle

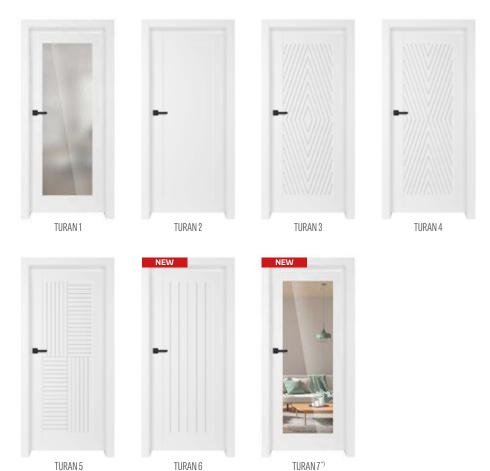



PAINTED



AVAILABLE SOLUTIONS (pp. 135-143)



AVAILABLE DOOR LEAF WIDTHS



CONSTRUCTION

- rebated or non-rebated door leaf made in the STILE technology
- timber stiles covered with thin HDF boards and laminated and coated with UV resistant varnish
- 16 mm thick HDF panels, moulded and coated with UV resistant
- optionally, against an additional charge, upper panels extending the frame - page 134 NEW

FINISHING

door leaves and door frames coated with water-based UV hardened varnish for high resistance to adverse use conditions

HARDWARE

- rebated door leaves: three silver 2-pin hinges adjusted horizontally
- three concealed hinges in a non-rebated leaf, silver (optionally black subject to an additional charge); hinges supplied with and included in the price of the door frame NEW
- a deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, against an additional charge, a black, magnetic lock NEW

GLAZING

- TURAN 1 model, 4 mm tempered glass or, against an additional charge, frosted or black VSG441 laminated safety glass, plain on
- TURAN 7 model available with a mirror on one side. Other side varnished board WHITE TITANIUM UV. Obverse - mirror on the hinge side.

MOULDING



ADDITIONAL CHARGES

ventilation cut

"100" rebated and non-rebated door leaf

metal hinge casings in the rebated door leaf (brushed nickel, patina, polished chrome, polished brass, white and black)

frosted or black VSG 221 laminated safety glass, plain on both sides (for TURAN 1)

drop-down gasket1)

can be replaced with a black magnetic lock for non-rebated door leaves

magnetic stop (buffer) 1) NEW (available in six colours p. 132)

factory-drilled openings for through-mounting applies to double-section handles in our offer, pages 120 to 127 NEW



REBATED, NON-REBATED PAINTED DOORS



MISKANT 2, BELLA slim black matt handle



MISKANT1



MISKANT 2



MISKANT 3



MISKANT 4



MISKANT 5




MISKANT 6

Presented model: MISKANT 2 with a black matt BELLA slim handle

PAINTED



AVAILABLE SOLUTIONS (pp. 135-143)



AVAILABLE DOOR LEAF WIDTHS



CONSTRUCTION

- · rebated or non-rebated door leaf made in the STILE technology
- timber stiles covered with thin HDF boards and laminated and coated with UV resistant varnish
- 16 mm thick HDF panels, moulded and coated with UV resistant varnish
- optionally, against an additional charge, upper panels extending the frame - page 134

 NEW

FINISHING

 door leaves and door frames coated with water-based UV hardened varnish for high resistance to adverse use conditions

HARDWARE

- rebated door leaves: three silver 2-pin hinges adjusted horizontally
- three concealed hinges in a non-rebated leaf, silver (optionally blacksubject to an additional charge); hinges supplied with and included in the price of the door frame

 NEW
- a deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, against an additional charge, a black, magnetic lock

 NEW

GLAZING

- toughened transparent or frosted glass with a thickness of 4 mm
- possibility to change the glazing side to REVERSE (OBVERSE standard glazing)
- black lines of 18 mm in width (thickness)

STANDARD "OBVERSE" GLAZING



"REVERSE" GLAZING MADE TO ORDER



ADDITIONAL CHARGES

ventilation cut

"100" rebated and non-rebated door leaf

metal hinge casings in the rebated door leaf (brushed nickel, patina, polished chrome, polished brass, white and black)

drop-down gasket1)

can be replaced with a black magnetic lock for non-rebated door leaves

magnetic stop (buffer) 1) NEW (available in six colours p. 132)

factory-drilled openings for through-mounting applies to double-section handles in our offer, pages 120 to 127

NEW



REBATED, NON-REBATED PAINTED DOORS



NEMEZJA 6, BELLA handle slim brass glossy



Presented model: NEMEZJA 6 with a black brass BELLA PREMIUM handle

CONSTRUCTION

- rebated or non-rebated door leaf made in the STILE technology
- timber stiles covered with thin HDF boards and laminated and coated with UV resistant varnish
- 16 mm thick HDF panels, moulded and coated with UV resistant varnish
- optionally, against an additional charge, upper panels extending the frame - page 134

 NEW

FINISHING

 door leaves and door frames coated with water-based UV hardened varnish for high resistance to adverse use conditions

HARDWARE

- rebated door leaves: three silver 2-pin hinges adjusted horizontally
- three concealed hinges in a non-rebated leaf, silver (optionally blacksubject to an additional charge); hinges supplied with and included in the price of the door frame

 NEW
- a deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, against an additional charge, a black, magnetic lock

 NEW

GLAZING

- frosted or transparent tempered glass as standard, and custom-made frosted VSG 221 laminated safety glass, plain on both sides
- possibility to change the glazing side to REVERSE (OBVERSE standard glazing)

PAINTED



AVAILABLE SOLUTIONS (pp. 135-143)



AVAILABLE DOOR LEAF WIDTHS



ADDITIONAL CHARGES

ventilation cut

"100" rebated and non-rebated door leaf

metal hinge casings in the rebated door leaf (brushed nickel, patina, polished chrome, polished brass, white and black)

frosted VSG 221 laminated safety glass, plain on both sides

drop-down gasket 1)

can be replaced with a black magnetic lock for non-rebated door leaves

magnetic stop (buffer) 1) NEW (available in six colours p. 132)


factory-drilled openings for through-mounting applies to double-section handles in our offer, pages 120 to 127 NEW



REBATED, NON-REBATED PAINTED DOORS



LAURENCJA 1, black VSG glass, matt BELLA handle, black

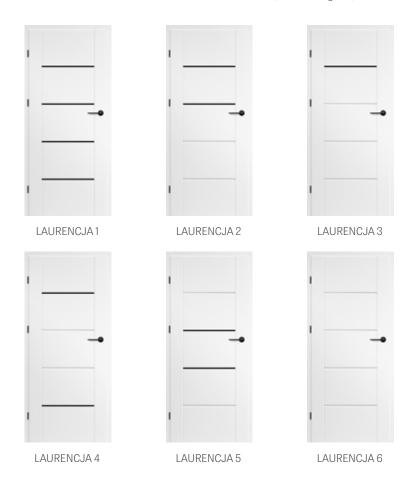




PAINTED



AVAILABLE SOLUTIONS (pp. 135-143)



AVAILABLE DOOR LEAF WIDTHS



CONSTRUCTION

- rebated or non-rebated door leaf made in the STILE technology
- timber stiles covered with thin HDF boards and laminated and coated with UV resistant varnish
- 4 mm thick HDF panels, moulded and coated with UVresistant varnish
- optionally, against an additional charge, upper panels extending the frame - page 134 NEW

FINISHING

door leaves and door frames coated with water-based UV hardened varnish for high resistance to adverse use conditions

HARDWARE

- rebated door leaves: three silver 2-pin hinges adjusted horizontally
- three concealed hinges in a non-rebated leaf, silver (optionally black subject to an additional charge); hinges supplied with and included in the price of the door frame NEW
- a deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, against an additional charge, a black, magnetic lock **NEW**

GLAZING

- frosted or transparent tempered glass as a standard, and custommade frosted or black VSG 221 laminated safety glass against an additional charge, plain on both sides
- possibility to change the glazing side to REVERSE (OBVERSE standard

ADDITIONAL CHARGES

ventilation cut

"100" rebated and non-rebated door leaf

metal hinge casings in the rebated door leaf (brushed nickel, patina, polished chrome, polished brass, white and black)

frosted or black VSG 221 laminated safety glass, NEW plain on both sides

drop-down gasket 1)

can be replaced with a black magnetic lock for non-rebated door leaves

magnetic stop (buffer) 1) NEW (available in six colours p. 132)

factory-drilled openings for through-mounting applies to double-section handles in our offer, pages 120 to 127





REBATED, NON-REBATED AND REVERSE PAINTED DOORS



MILDA 4, CUBE PREMIUM handle, black






PAINTED



AVAILABLE SOLUTIONS (pp. 135-143)



AVAILABLE DOOR LEAF WIDTHS



CONSTRUCTION

- · rebated, non-rebated or reverse door leaf
- internal timber stile (sides and top, bottom -MDF) covered with two HDF boards
- honeycomb stabilising filling or solid core filling against an additional charge
- optionally, against an additional charge, upper panels extending the frame - page 134

 NEW

FINISHING

- door leaves and door frames coated with water-based UV hardened varnish for high resistance to adverse use conditions
- · door leaf edge made in standard or non-rebated technology

HARDWARE

- · three pin mortise hinges in a rebated door leaf
- three concealed hinges in the non-adjacent leaf and two hinges in the reverse leaf in silver (black against an extra charge); hinges are supplied and priced with the door frame

 NEW
- a deadbolt lock in the rebated door leaf and a key-locked magnetic lock in the non-rebated and reverse door leaves, thumb turn cylinder, economy or silver with a blockade or, optionally, against an additional charge, a black magnetic lock

 NEW

MOULDING



ADDITIONAL CHARGES

reverse door leaf NEW

solid core filling

ventilation cut

"100" rebated and non-rebated door leaf

additional bottom rail (can be cut by customer up to max 8 cm)

metal hinge casings in the rebated door leaf (brushed nickel, patina, polished chrome, polished brass, white and black)

drop-down gasket 1)

can be replaced with a black magnetic lock for non-rebated and reverse leaves

magnetic stop (buffer) 1) NEW (available in six colours p. 132)





BALDUR 1 with a CUBE PREMIUM handle and black VSG 441 laminated glass






PAINTED



AVAILABLE SOLUTIONS 1)3) (pp. 135-143)





VSG/ESG laminated and tempered glass as a standard, frosted or black

CONSTRUCTION

- · rebated, non-rebated or reverse door leaf
- internal timber stile (sides and top, bottom -MDF) covered with two HDF boards
- honeycomb stabilising filling or solid core filling against an additional charge
- optionally, against an additional charge, upper panels extending the frame - page 134

 NEW

FINISHING

- door leaves and door frames coated with water-based UV hardened varnish for high resistance to adverse use conditions
- · door leaf edge made in standard or non-rebated technology
- the BALDUR1 sliding systems have a 17 mm high aluminium or black coloured profile in the lower part of the glass pane

HARDWARE

- · three pin mortise hinges in a rebated door leaf
- three concealed hinges in the non-adjacent leaf and two hinges in the reverse leaf in silver (black against an extra charge); hinges are supplied and priced with the door frame

 NEW
- a deadbolt lock in the rebated door leaf and a key-locked magnetic lock in the non-rebated and reverse door leaves, thumb turn cylinder, economy or silver with a blockade or, optionally, against an additional charge, a black magnetic lock

GLAZING

- BALDUR 1, 3, 5: SG/ESG 441 laminated and tempered safetyglass as a standard, frosted or black, plain on both sides
- fixed glazing widths: BALDUR 1 50 mm, BALDUR 3, 5 210 mm

ADDITIONAL CHARGES

reverse door leaf NEW

solid core filling

ventilation cut

"100" rebated and non-rebated door leaf

additional bottom bar to enable the customer to shorten the leaf by themselves drop-down gasket (not for the BALDUR 1, 3, 5 models)


metal hinge casings in the rebated door leaf (brushed nickel, patina, polished chrome, polished brass, white and black)

drop-down gasket 2) (not for the BALDUR 1, 3, 5 models)

can be replaced with a black magnetic lock for non-rebated and reverse leaves

magnetic stop (buffer) 2) **NEW** (available in six colours p. 132)

VENTILATION CUT



 $^{^{\}mbox{\tiny 1)}}$ the BALDUR 1, 3, 5 models are not available with sliding systems or double-leaf doors

 $^{^{\}rm 2)}$ the stop prevents application of a drop-down gasket and vice versa

³⁾ the BALDUR 1 model is not available with pocket systems





ANUBIS 2, handle: BELLA slim, shiny barass






PAINTED



AVAILABLE SOLUTIONS (pp. 135-143)



AVAILABLE DOOR LEAF WIDTHS



CONSTRUCTION

- · rebated, non-rebated or reverse door leaf
- internal timber stile (sides and top, bottom -MDF) covered with two HDF boards
- honeycomb stabilising filling or solid core filling against an additional charge
- optionally, against an additional charge, upper panels extending the frame - page 134

 NEW

FINISHING

- door leaves and door frames coated with water-based UV hardened varnish for high resistance to adverse use conditions
- · door leaf edge made in standard or non-rebated technology

HARDWARE

- · three pin mortise hinges in a rebated door leaf
- three concealed hinges in the non-adjacent leaf and two hinges in the reverse leaf in silver (black against an extra charge); hinges are supplied and priced with the door frame

 NEW
- a deadbolt lock in the rebated door leaf and a key-locked magnetic lock in the non-rebated and reverse door leaves, thumb turn cylinder, economy or silver with a blockade or, optionally, against an additional charge, a black magnetic lock

 NEW

MOULDING



ADDITIONAL CHARGES

reverse door leaf NEW

solid core filling

ventilation cut

"100" rebated and non-rebated door leaf

additional bottom rail (can be cut by customer up to max 8 cm)

metal hinge casings in the rebated door leaf (brushed nickel, patina, polished chrome, polished brass, white and black)

drop-down gasket 1)

can be replaced with a black magnetic lock for non-rebated and reverse leaves $% \left(1\right) =\left(1\right) \left(1\right) \left($

magnetic stop (buffer) 1) NEW (available in six colours p. 132)





SYLENA 2, CUBE handle, black, matt






PAINTED



AVAILABLE SOLUTIONS (pp. 135-143)



AVAILABLE DOOR LEAF WIDTHS



CONSTRUCTION

- · rebated, non-rebated or reverse door leaf
- internal timber stile (sides and top, bottom -MDF) covered with two HDF boards
- honeycomb stabilising filling or solid core filling against an additional charge
- optionally, against an additional charge, upper panels extending the frame - page 134

 NEW

FINISHING

- door leaves and door frames coated with water-based UV hardened varnish for high resistance to adverse use conditions
- · door leaf edge made in standard or non-rebated technology

HARDWARE

- · three pin mortise hinges in a rebated door leaf
- three concealed hinges in the non-adjacent leaf and two hinges in the reverse leaf in silver (black against an extra charge); hinges are supplied and priced with the door frame

 NEW
- a deadbolt lock in the rebated door leaf and a key-locked magnetic lock in the non-rebated and reverse door leaves, thumb turn cylinder, economy or silver with a blockade or, optionally, against an additional charge, a black magnetic lock

 NEW

MOULDING



ADDITIONAL CHARGES

reverse door leaf NEW

solid core filling

ventilation cut

"100" rebated and non-rebated door leaf

additional bottom rail (can be cut by customer up to max 8 cm)

metal hinge casings in the rebated door leaf (brushed nickel, patina, polished chrome, polished brass, white and black)

drop-down gasket 1)

can be replaced with a black magnetic lock for non-rebated and reverse leaves

magnetic stop (buffer) 1) NEW (available in six colours p. 132)





DECORATIVE INSERT FLUSH WITH THE LAMINATE SURFACE

LUX INLAY **OAK**



LUX INLAY **BLACK**



LUX INLAY BRUSHED STEEL













inlay LUX 315 door frame OAK CPL 0,2 door leaf WHITE ST CPL



inlay LUX 214

inlay LUX 114



inlay LUX 207

door frame and leaf: LIGHT-GREY ST CPL

inlay LUX 109

INLAYS are located on both sides of the leaf and are flush with its surface.

The inlay width is 8 mm and 220 mm (LUX 315 inlay).

Available colours of the LUX INLAY: brushed steel, black, oak (compatible with OAK CPL 0,2 and 0,7).

The presented INLAYS can be optionally used in the following models against an additional charge:

- **UNO PREMIUM laminate**
- ALTAMURA 1
- FORTECA RC2 & RC3
- HERSE SET 32 dB
- HERSE SET AKUSTIC 39 dB
- LEDA EI30, EI60
- HYPERION EI30 RC2





UNO PREMIUM inlay 313, door-leaf with WHITE PREMIUM laminate, door-frame laminate OAK CPL, LUNA PREMIUM handle round, black matt







PREMIUM 7 7



AVAILABLE DOOR LEAF WIDTHS



EDGE FINISH TYPES





EDGE FINISH





CONSTRUCTION

- rebated, non-rebated or reverse door leaf
- internal timber stile (sides and top, bottom -MDF) covered with two HDF boards
- stabilizing "honeycomb" filling
- solid core filling, against an additional charge
- optionally, against an additional charge, upper panels extending the frame page 134 NEW

FINISHING


- · HDF board with PREMIUM laminate
- door leaf edge made in standard rebated or non-rebated technology
- the edge laminated in the same colour as the door leaf surface or, optionally, in plain black (the decor options include transverse larch with a black edge with a horizontal structure)
- inserts (inlay) colour: brushed steel, black and OAK CPL with a width of 8 mm or 200 mm (LUX inlay315) flush with the leaf, on both sides of the leaf

HARDWARE

- · three pin mortise hinges in a rebated door leaf
- three concealed hinges in the non-adjacent leaf and two hinges in the reverse leaf in silver (black against an extra charge); hinges are supplied and priced with the door frame

bolt lock in the rebate leaf and a magnetic lock in the non-rebate and reverse leaf: with a key, thumb turn cylinder, economy or with silver, with a blockade; optionally, against an extra charge, a black magnetic lock NEW

AVAILABLE SOLUTIONS (pp. 135-143)



ADDITIONAL CHARGES

reverse door leaf NEW

solid core filling

door closer reinforcement

arm door closer (silver, black, white, brown)

additional bottom bar (can be cut by customer up to max8 cm)

round and square metal sleeves (4 pcs);

brushed nickel or patina finish, white and black

plastic woodgrain sleeves (4 pcs)

ventilation door cut or grille

"100" rebated and non-rebated door leaf

"110" rebated and non-rebated door leaf

drop-down gasket 2)

metal hinge casings in the rebated door leaf (brushed nickel, patina, polished chrome, polished brass, white and black)

stainless steel porthole: "chrome" polished or "satine" brushed; frosted decormat glass, non-tinted glass; porthole ID 235 mm external 350 mm)

black door leaf edge finish

can be replaced with a black magnetic lock for non-rebated and reverse leaves

magnetic stop (buffer) 2) NEW (available in six colours p. 132)

LUX inlay; available versions p. 80-81

¹⁾ plain white laminate imitating a painted surface

²⁾ the stop prevents application of a drop-down gasket and vice versa





BALDUR 1, leaf laminate BLACK ST CPL, frame laminate OAK NATUR PREMIUM, handle BELLA brass glossy





BALDUR1 BALDUR 3





CPL 7 7 OAK ST CPL GREY OAK ST CPL VENGE ST CPL GREY PINE ST CPL WHITE ST CPI 1) 2) CAPPUCCINO ST CPL² LIGHT-GREY ST CPL² BLACK ST CPL² WHITE CPL 0,2 ANTHRACITE CPL 0,2 ASH GREY CPI 0.2 OAK CPL 0.2 PREMIUM 7 7 WALNUT PREMIUM GREY MAPLE PREMIUM OAK PREMIUM WHITE BARK PREMIUM GRAPHITE ASH PREMILIM CONCRETE PREMIUM HORIZONTAL LARCH NATUR OAK PREMIUM WHITE PREMIUM 1)

AVAILABLE SOLUTIONS 3) (pp. 135-143)



EDGE FINISH TYPES





LEAF EDGE FINISH



LEAF EDGE FINISH

CONSTRUCTION

- · rebated, non-rebated or reverse door leaf
- internal timber stile (sides and top, bottom -MDF) covered with two HDF boards
- honeycomb stabilising filling or solid core filling against an additional charge
- optionally, against an additional charge, upper panels extending the frame page 134
 New

FINISHING

- · HDF board in PREMIUM or CPL laminate
- leaf edge made in the standard rebated or non-rebated technology with CPL 0.2 laminates, laminated with the ABS edging, and in the same colour as the leaf only or, against an additional charge, with a standard black edge
- reverse door leaf only in with the STANDARD edge and with the GREKO, PREMIUM and ST CPL decors
- The edge laminated in the same colour as the door leaf surface or, optionally, in plain black (transverse larch, black edge with a transverse structure) black, partial edge finish (two vertical and a top one) and by the glass.
- door-leaf BALDUR 1 rebated and non-rebated only for the WHITE ST CPL decor made optionally in the soft technology (no visible longitudinal laminate joints)
- the BALDUR 1 sliding systems have a 17 mm high aluminium or black coloured profile in the lower part of the glass pane

 NEW

HARDWARE

- · two pin mortise hinges or three hinges (PREMIUM finish) in a rebated door leaf
- three concealed hinges in the non-adjacent leaf and two hinges in the reverse leaf in silver (black against an extra charge); hinges are supplied and priced with the door frame
- a deadbolt lock in the rebated door leaf and a key-locked magnetic lock in the non-rebated and reverse door leaves, thumb turn cylinder, economy or silver with a blockade or, optionally, against an additional charge, a black magnetic lock

GLAZING

BALDUR 1, 3: 8 mm tempered frosted glass or VSG/ESG 441 safety glass, frosted or black NEW , plain on both sides

AVAILABLE DOOR LEAF WIDTHS



ADDITIONAL CHARGES

reverse door leaf NEW

(not available with CPL 0.2 finishing and for Baldur 1 with 'SOFT' edge)

solid core filling

ventilation cut

"100" rebated and non-rebated door leaf

additional hinge in the rebated door leaf and used always as per Czech standard (not applicable to solid core board, GREKO & PREMIUM decors and the "100" leaf)

frosted or black VSG/ESG 441 glazing

metal hinge casings in the rebated door leaf (brushed nickel, patina, polished chrome, polished brass, white and black)

black door leaf edge finish NEW

can be replaced with a black magnetic lock for non-rebated and reverse leaves

magnetic stop (buffer) NEW (available in six colours p. 132)

VENTILATION CUT



¹⁾ plain white laminate imitating a painted surface

²⁾ special AntiFinger coating to reduce dirt and fingerprints NEW

³⁾ the BALDUR 3 model not available in sliding systems or double-leaf doors

⁴⁾ only BALDUR 1 rebated and non-rebated in WHITE ST CPL laminate





BALDUR 3, laminate CAPPUCCINO ST CPL, handle CUBE







BALDUR 1, LIGHT-GREY ST CPL laminate, TOPAZ INOX handle









ALTAMURA 5, laminate OAK ST CPL, LINEA handle



ALTAMURA 1



ALTAMURA 2



ALTAMURA 3



ALTAMURA 4



Middle panel



ALTAMURA 5



ALTAMURA 6



ALTAMURA 7



ALTAMURA 8



grille panel



Bottom panel

CONSTRUCTION

- · rebated, non-rebated or reverse door leaf
- MDF stiles and rails covered with two HDF boards in GREKO and FINISH laminates
- internal timber stile (sides and top, bottom -MDF) covered with two HDF boards in CPL and PREMIJIM laminate
- · honeycomb stabilising filling or solid core filling against an additional charge
- optionally, against an additional charge, upper panels extending the frame page 134

NEVV

FINISHING

- · laminated HDF board
- door leaf edge made in the SOFT (FINISH & GREKO) or the STANDARD (FINISH, GREKO, PREMIUM & CPL) technology
- CPL 0.2 & 0.7 laminates available only with the STANDARD edge with the ABS edging in the same colour as the door leaf only or, against an additional charge, with a standard black edge
- · reverse door leaf only in the STANDARD edge and in GREKO, PREMIUM and ST CPL decors
- edge (in STANDARD or non-rebated finish) laminated in edging in the same colour as the surface or, optionally, in plain black (black edging with transverse larch decor and a black edge with a transverse structure)
- for ALTAMURA 1 double-sided inlays available against an additional charge, as shown on pages 80-81

HARDWARE

- two pin mortise hinges or three hinges (GREKO & PREMIUM decors) in a rebated door leaf
- three concealed hinges in the non-adjacent leaf and two hinges in the reverse leaf in silver (black against an extra charge); hinges are supplied and priced with the door frame
- a deadbolt lock in the rebated door leaf and a key-locked magnetic lock in the non-rebated and reversedoor leaves, thumb turn cylinder; economy or silver with a blockade or, optionally, against an additional charge, a black magnetic lock

GLAZING

CONCRETE PREMIUM

HORIZONTAL LARCH

- frosted decormat glass as standard, transparent or, charged extra, frosted VSG 221 safety glass, plain on both sides
- possibility to change the glazing side to REVERSE (OBVERSE standard glazing)

FINISH ファコ ACACIA FINISH WAI NUT FINISH LIGHT ACACIA FINISH GREKO ファ GREKO WALNUT SANREMO GREKO GREKO SONOMA MEDIUM GREKO OAK GREKO ELM GOLDEN GREKO OAK GREKO GREY OAK GREKO WHITE PINE WHITE GREKO 1) 2) SNOW-WHITE GREKO 1) 2 GREKO OAK CPL 7 7 GREY DAK ST CPI VENGE ST CPI WHITE ST CPI 1) 4) DAK ST CPI GREY PINE ST CPI BLACK ST CPI CAPPLICCING ST CPI 4 LIGHT-GREVIST CPL 4 WHITE CPL 0.2 & 0.7 ASH GREY CPL 0.2 & 0.7 ANTHRACITE CPL 0.2 & 0.7 0AK CPL 0 2 & 0 7 PREMIUM 7 7 WALNUT PREMIUM GREY MAPLE PREMIUM OAK PREMIUM WHITE BARK PREMIUM GRAPHITE ASH PRFMIUM

NATUR OAK PREMIUM

WHITE PREMIUM 13

ADDITIONAL CHARGES

reverse door leaf NEW (unavailable for CPL 0,2 and 0,7)

solid core filling (price includes a third hinge used in the rebated door leaf as standard)

door closer reinforcement

arm door closer (silver, black, white, brown)

additional bottom bar (can be cut by customer up to max 8 cm)

ventilation door cut or grille

metal round or square ventilation sleeves (4 pcs); brushed nickel or patina finish in white or black

plastic sleeves

rebated and non-rebated leaf "100" rebated and non-rebated leaf "110" solid core filling (price includes a third hinge used in the rebated door leaf as standard)

frosted VSG 221 laminated glass

additional hinge in the rebated door leaf and used always as per Czech standard (not applicable to solid core leaf, GREKO & PREMIUM decors and "100" leaf)

drop-down gasket 3)

metal hinge casings in the rebated door leaf (brushed nickel, patina, polished chrome, polished brass, white and black)

ALTAMURA 1: stainless steel porthole: polished "chrome" or brushed "satin" and black matt; frosted decormat glass, non-tinted glass; portholedimeter: internal: 235 mm; external 350 mm)


stainless steel panel (fitted on both sides in the rebated STANDARD door leaves only), height $300\,\mathrm{mm}$

black door leaf edge finish NEW

can be replaced with a black magnetic lock for non-rebated and reverse leaves

magnetic stop (buffer) 3) NEW (available in six colours p. 132)

ALTAMURA 1 model: LUX inlay; available versions p. 80-81

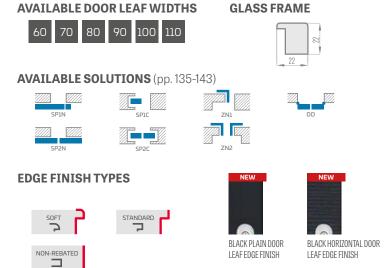

- 1) plain white laminate imitating a painted surface
- 2) available only in STANDARD
- $^{\mbox{\tiny 3)}}$ the stop prevents application of a drop-down gasket and vice versa
- 4) special AntiFinger coating NEW to reduce dirt and fingerprints





GREY OAK ST CPL laminate, TOPAZ INOX handle



ANSEDONIA1



ANSEDONIA 2



ANSEDONIA 3



ANSEDONIA 4



ANSEDONIA 5



ANSEDONIA 6



ANSEDONIA 7



ANSEDONIA 8



ANSEDONIA 9



ANSEDONIA 10



ANSEDONIA 11



ANSEDONIA 12

CONSTRUCTION

- rebated, non-rebated or reverse door leaf
- MDF stiles and rails covered with two HDF boards in GREKO and FINISH laminates
- internal timber stile (sides and top, bottom -MDF) covered with two HDF boards in CPL and
- honeycomb stabilising filling or solid core filling against an additional charge
- optionally, against an additional charge, upper panels extending the frame page 134

FINISHING

- laminated HDF board
- door leaf edge made in the SOFT or STANDARD technology.
- CPL 0.2 & 0.7 laminates available only with the STANDARD edge with the ABS edging in the same colour as the door leaf only or, against an additional charge, with a standard black edge
- reverse door leaf only in the STANDARD edge and in GREKO, PREMIUM and ST CPL decors
- edge (in STANDARD or non-rebated finish) laminated in edging in the same colour as the surface or, optionally, in plain black (black edging with transverse larch decor and a black edge with a transverse structure)

HARDWARE

- two pin mortise hinges or three hinges (GREKO & PREMIUM decors) in a rebated door leaf
- three concealed hinges in the non-adjacent leaf and two hinges in the reverse leaf in silver (black against an extra charge); hinges are supplied and priced with the door frame
- bolt lock in the rebated leaf and magnetic lock in the non-rebated leaf and reverse leaf: with a key, thumb turn, economy or with silver, with a blockade; optionally, against an extra charge, a black magnetic lock NEW

GLAZING

- frosted decormat glass as standard, transparent or, charged extra, frosted VSG 221safety glass, plain on both sides
- possibility to change the glazing side to REVERSE (OBVERSE standard glazing)

ADDITIONAL CHARGES

reverse door leaf NEW

(not available in CPL 0.2 & 0.7)

solid core filling (price includes a third hinge used in the rebated door leaf as standard)

door closer reinforcement

arm door closer (silver, black, white, brown)

additional bottom bar (can be cut by customer up to max8 cm)

ventilation door cut or grille

plastic sleeves

metal round or square ventilation sleeves (4 pcs); brushed nickel or patina finish in white or black

"100" rebated and non-rebated door leaf (price includes a third hinge used in the door leaf as standard)

frosted VSG 221 laminated glass, plain on both sides

additional hinge in the rebated door leaf and used always as per Czech standard (not applicable to solid core leaf, GREKO & PREMIUM decors and "100" leaf)

drop-down gasket 3)

metal hinge casings in the rebated door leaf (brushed nickel, patina, polished chrome, polished brass, white and black)

black door leaf edge finish NEW


can be replaced with a black magnetic lock for non-rebated and reverse leaves

magnetic stop (buffer) 3) NEW (available in six colours p. 132)









AVAILABLE DOOR LEAF WIDTHS






GLASS FRAME



AVAILABLE SOLUTIONS (pp. 135-143)



EDGE FINISH TYPES







¹⁾ plain white laminate imitating a painted surface

²⁾ available only in STANDARD

³⁾ the stop prevents application of a drop-down gasket and vice versa

⁴⁾ special AntiFinger coating NEW to reduce dirt and fingerprints





LORIENT 1, GREY MAPLE PREMIUM laminate, TOPAZ INOX handle



CONSTRUCTION

- rebated, non-rebated or reverse door leaf
- MDF stiles and rails covered with two HDF boards in GREKO and FINISH laminates
- internal timber stile (sides and top, bottom -MDF) covered with two HDF boards in CPL and
- honeycomb stabilising filling or solid core filling against an additional charge
- optionally, against an additional charge, upper panels extending the frame page 134

FINISHING

- laminated HDF board
- door leaf edge made in the SOFT or STANDARD technology.
- reverse door leaf only in the STANDARD edge and in GREKO, PREMIUM and ST CPL decors
- edge (in STANDARD or non-rebated finish) laminated in edging in the same colour as the surface or, optionally, in plain black (black edging with transverse larch decor and a black edge with a transverse structure)

HARDWARE

- two pin mortise hinges or three hinges (GREKO & PREMIUM decors) in a rebated door leaf
- three concealed hinges in the non-adjacent leaf and two hinges in the reverse leaf in silver (black against an extra charge); hinges are supplied and priced with the door frame

bolt lock in the rebated leaf and magnetic lock in the non-rebated leaf and reverse leaf: with a key, thumb turn, economy or with silver, with a blockade; optionally, against an extra charge, a black magnetic lock NEW

GLAZING

- frosted decormat glass as standard, transparent or, charged extra, frosted VSG 221 safety glass, plain on both sides
- possibility to change the glazing side to REVERSE (OBVERSE standard glazing)

ADDITIONAL CHARGES

reverse door leaf NEW

solid core filling (price includes a third hinge used in the rebated door leaf as standard)

door closer reinforcement

arm door closer (silver, black, white, brown)

additional bottom bar (can be cut by customer up to max 8 cm)

ventilation door cut or grille

plastic sleeves

metal round or square ventilation sleeves (4 pcs); brushed nickel or patina finish in white or black

"100" rebated and non-rebated door leaf (price includes a third hinge used in the door leaf as standard)

frosted VSG 221 laminated glass, plain on both sides

additional hinge in the rebated door leaf and used always as per Czech standard (not applicable to solid core leaf, GREKO & PREMIUM decors and "100" leaf)

drop-down gasket 3)

metal hinge casings in the rebated door leaf (brushed nickel, patina, polished chrome, polished brass, white and black)

black door leaf edge finish NEW

can be replaced with a black magnetic lock for non-rebated and reverse leaves

magnetic stop (buffer) 3) NEW (available in six colours p. 132)










AVAILABLE DOOR LEAF WIDTHS





GLASS FRAME

AVAILABLE SOLUTIONS (pp. 135-143)



EDGE FINISH TYPES







¹⁾ plain white laminate imitating a painted surface

²⁾ available only in STANDARD

³⁾ the stop prevents application of a drop-down gasket and vice versa

⁴⁾ special AntiFinger coating **NEW** to reduce dirt and fingerprints





MENTON 1, GREY GREKO OAK laminate, black matt TOPAZ





MENTON 2



MENTON 3



MENTON 4



MENTON 5



MENTON 6



MENTON 7



MENTON 8



MENTON 9



MENTON 10



MENTON 11



MENTON 12

CONSTRUCTION

- · rebated, non-rebated or reverse door leaf
- MDF stiles and rails covered with two HDF boards in GREKO and FINISH laminates
- internal timber stile (sides and top, bottom -MDF) covered with two HDF boards in CPL and PREMIUM laminate
- · honeycomb stabilising filling or solid core filling against an additional charge
- optionally, against an additional charge, upper panels extending the frame page 134

FINISHING

- · door leaf edge made in the SOFT or STANDARD technology.
- CPL 0.2 & 0.7 laminates available only with the STANDARD edge with the ABS edging in the same colour as the door leaf only or, against an additional charge, with a standard black edge
- · reverse door leaf only in the STANDARD edge and in GREKO, PREMIUM and ST CPL decors
- edge (in STANDARD or non-rebated finish) laminated in edging in the same colour as the surface or, optionally, in plain black (black edging with transverse larch decor and a black edge with a transverse structure)

HARDWARE

- two pin mortise hinges or three hinges (GREKO & PREMIUM decors) in a rebated door leaf.
- three concealed hinges in the non-adjacent leaf and two hinges in the reverse leaf in silver (black against an extra charge); hinges are supplied and priced with the door frame
- bolt lock in the rebated leaf and magnetic lock in thenon-rebated leaf and reverse leaf: with a key, thumb turn, economy or with silver, with a blockade; optionally, against an extra charge, a black magnetic lock

GLAZING

- frosted decormat glass as standard, transparent or, charged extra, frosted VSG 221 safety glass, plain on both sides
- · possibility to change the glazing side to REVERSE (OBVERSE standard glazing)

ADDITIONAL CHARGES

reverse door leaf NEW

(Not available in CPL 0.2 & 0.7)

solid core filling (price includes a third hinge used in the rebated door leaf as standard)

door closer reinforcement

arm door closer (silver, black, white, brown)

additional bottom bar (can be cut by customer up to max 8 cm)

ventilation door cut or grille

metal round or square ventilation sleeves (4 pcs);

brushed nickel or patina finish in white or black

plastic sleeves

"100" rebated and non-rebated door leaf (price includes a third hinge used in the door leaf as standard)

frosted VSG 221 laminated glass

additional hinge in the rebated door leaf and used always as per Czech standard (not applicable to solid core leaf, GREKO & PREMIUM decors and "100" leaf)

drop-down gasket 3)

metal hinge casings in the rebated door leaf (brushed nickel, patina, polished chrome, polished brass, white and black)

black door leaf edge finish NEW


can be replaced with a black magnetic lock for non-rebated and reverse leaves

magnetic stop (buffer) 3) NEW (available in six colours p. 132)










AVAILABLE DOOR LEAF WIDTHS



22

GLASS FRAME

AVAILABLE SOLUTIONS (pp. 135-143)



EDGE FINISH TYPES







¹⁾ plain white laminate imitating a painted surface

²⁾ available only in STANDARD

 $^{^{\}mbox{\tiny 3)}}$ the stop prevents application of a drop-down gasket and vice versa





SORANO 1, WENGE ST CPL laminate, TOPAZ INOX handle



CONSTRUCTION

- · rebated, non-rebated or reverse door leaf
- MDF stiles and rails covered with two HDF boards in GREKO and FINISH laminates
- internal timber stile (sides and top, bottom -MDF) covered with two HDF boards in the CPL & PREMIUM laminate
- · honeycomb stabilising filling or solid core filling against an additional charge
- optionally, against an additional charge, upper panels extending the frame page 134

FINISHING

- · door leaf edge made in the SOFT or STANDARD technology.
- CPL 0.2 & 0.7 laminates available only with the STANDARD edge with the ABS edging in the same colour as the door leaf only or, against an additional charge, with a standard black edge
- · reverse door leaf only in the STANDARD edge and in GREKO, PREMIUM and ST CPL decors
- edge (in STANDARD or non-rebated finish) laminated in edging in the same colour as the surface or, optionally, in plain black (black edging with transverse larch decor and a black edge with a transverse structure)

HARDWARE

- two pin mortise hinges or three hinges (GREKO & PREMIUM decors) in a rebated door leaf
- three concealed hinges in the non-adjacent leaf and two hinges in the reverse leaf in silver (black against an extra charge); hinges are supplied and priced with the door frame
- bolt lock in the rebated leaf and magnetic lock in thenon-rebated leaf and reverse leaf: with a key, thumb turn, economy or with silver, with a blockade; optionally, against an extra charge, a black magnetic lock

GLAZING

- frosted decormat glass as standard, transparent or, charged extra, frosted VSG 221 safety glass, plain on both sides
- possibility to change the glazing side to REVERSE (OBVERSE standard glazing)

ADDITIONAL CHARGES

reverse door leaf NEW

(not available in CPL 0.2 & 0.7)

solid core filling (price includes a third hinge used in the rebated door leaf as standard)

door closer reinforcement

arm door closer (silver, black, white, brown)

additional bottom bar (can be cut by customer up to max8 cm)

ventilation door cut or grille

metal round or square ventilation sleeves (4 pcs);

brushed nickel or patina finish in white or black

plastic sleeves

"100" rebated and non-rebated door leaf (price includes a third hinge used in the door leaf as standard)

frosted VSG 221 laminated glass

additional hinge in the rebated door leaf and used always as per Czech standard (not applicable to solid core leaf, GREKO & PREMIUM decors and "100" leaf)

drop-down gasket 3)

metal hinge casings in the rebated door leaf (brushed nickel, patina, polished chrome, polished brass, white and black)

black door leaf edge finish NEW


can be replaced with a black magnetic lock for non-rebated and reverse leaves

magnetic stop (buffer) 3) NEW (available in six colours p. 132)










AVAILABLE DOOR LEAF WIDTHS



GLASS FRAME

AVAILABLE SOLUTIONS (pp. 135-143)



EDGE FINISH TYPES







¹⁾ plain white laminate imitating a painted surface


²⁾ available only in STANDARD

 $^{^{\}mbox{\scriptsize 3)}}$ the stop prevents application of a drop-down gasket and vice versa

⁴⁾ special AntiFinger coating NEW to reduce dirt and fingerprints



OPENING INWARDS/OUTWARDS RC2 & RC3 BURGLARPROOF REBATED DOORS

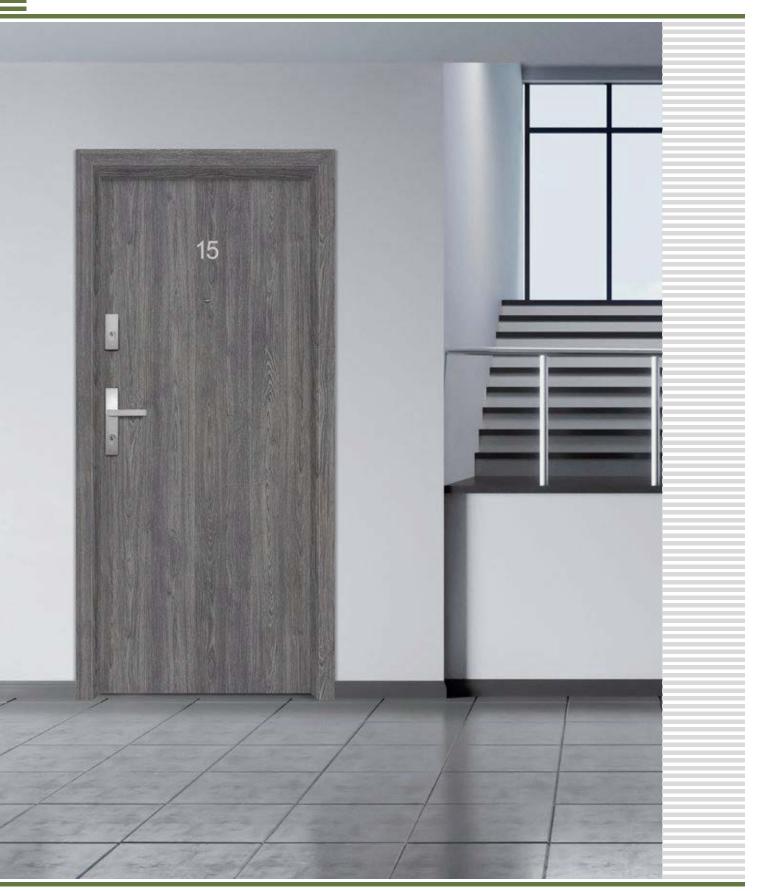

FORTECA RC 3, laminate: GRAPHITE ASH PREMIUM





2 HOOK BOLTS



UPPER AND LOWER SECURITY LOCKS



FOUR DOOR STRIKER PLATES Adjustable



DOOR LEAF 46 mm Steel sheet reinforced



FORTECA RC2



MULTIPOINT LOCK



FORTECA RC3





DOOR VIEWER



FOUR 2-PIN HINGES; Ø16, 3D ADJUSTABLE



4 HINGE BOLTS



FIXED DOOR FRAME Timber frame in RC2; Reinforced frame in RC3





HARDWOOD TRESHOLD (lacquer)




STAINLESS STEEL TRESHOLD

FORTECA DOOR LEAF CROSS-SECTION









OPENING INWARDS/OUTWARDS RC2 & RC3 BURGLARPROOF REBATED DOORS





FORTECA RC2, laminate NATUR OAK PREMIUM, handle black matt

F	ORTECA RC 2 NEW	
	SILVED DACKACE	
GOLD PACKAGE	SILVER PACKAGE	DOOR LEAF

F	FORTECA RC 3 NEW	
GOLD PACKAGE	SILVER PACKAGE	DOOR LEAF

RC2 - Important:

For compliance with RC2 burglary resistance class as per the PN-EN 1627:2012, the hardware should meet the following requirements:

Min Class 2 as per PN-EN 1906:2012 – for handles and door face plates

Min Class 4 and 1 as per PN-EN 1303:2015 – for lock cylinders

RC3 - Important:

For compliance with RC3 burglary resistance class as per PN-EN 1627:2012, the hardware should meet the following requirements:

Min Class 3 as per PN-EN 1906:2012 – for handles and door face plates

Min Class 4 and 1 as per PN-EN 1303:2015 – for lock cylinders

GENRAL INFORMATION

- the FORTECA inwards/outwards opening burglar-proof doors are rated for sound insulation at Rw=38 Db, have a burglary resistance class of RC2 OR RC3 as per PN EN 1627:2012 and class 5 for mechanical durability.
- available in the GOLD and SILVER packages with optional installation kit and steel door frame.
- · designed to be used as an internal front door.

CONSTRUCTION

- · timber stile covered with glulam HDF boards
- specially designed solid core filling
- · whole door leaf reinforced with a steel panel
- door leaf thickness of 46 mm

FINISHING

- leaf edge made in the STANDARD technology (with CPL 0.2 & 0.7 laminates, with the ABS edging in the same colour as the leaf only or with a standard black edge against an additional charge)
- 8 mm or 220 mm wide black brushed steel or OAK CPL inserts (inlays) flush with the door leaf, on both sides of the leaf

 NEW
- the edge laminated in the same colour as the door leaf or, optionally plain black (transverse larch, black edge with a transverse structure)
- HDF board covered with the FINISH, GREKO or PREMIUM laminate
- side and top panels glued to the wall (only with a masonry wall installed door frame and an 8 cm clip-on square) made to order for additional charge - page 134

 NEW

HARDWARE

- four silver 2-pin hinges; Ø16; 3D adjustable (2D with steel frame)
- · four-point security hook bolt lock as standard for two lock cores
- · four-hinge bolts on the hinge side
- · possibility to apply an arm door closer
- · lower lock PZ centre is 92 mm

FIXED REBATED DOOR FRAME

- fixed timber door frame covered with MDF boards;
 Internally reinforced with a steel square on the door striker plates side for FORTECA RC3
- installation in the range of 90-450 mm every 40 mm
- adjustable main grip in the door frame and two adjustable grips for the bolt hook and additional lock

GOLD PACKAGE

 the GOLD PACKAGE FORTECA doors are complete with a steel or timber threshold, with a multipoint lock, and pre-drilled holes for a security handle and upper face plate. They come with a door viewer (hole to be drilled by the customer) and certified security handles and lock cores.

SILVER PACKAGE NEW

the SILVER PACKAGE FORTECA doors are complete with a steel or timber threshold, and a multipoint lock. We recommend ordering a door viewer and certified hardware from the ERKADO range or ordering the same from an external supplier keeping in mind the important note on compliance with the anti-burglary requirements (p. 100).

ADDITIONAL CHARGES

"100" door

black door leaf edge finish

handle PZ centre of 92 mm with the top face plate for RC 2 doors, silver F9 or black (Class 2 as per the PN-EN 1906:2012 standard)

handle with lock core protection and the rosette plate for the RC3 door; F9 silver (Class 3 as per PN-EN 1906:2012)

two silver lock cores set (one with a thumbturn) in a master key system for RC2 and RC3 doors (Class 4 & 1 as per PN-EN 1303:2015)

door viewer (nickel or black)

metal hinge covers (satin nickel, patina)

cutting the door with the wooden frame to 8 cm and with steel frame to $1\,\mathrm{cm}$

LUX inlay; available versions p. 80-81

arm door closer (silver, black, white, brown)


magnetic stop (buffer) NEW (available in six colours p. 132)



FINISH



PREMIUM



CPL



 $^{^{\}mbox{\tiny 1)}}$ plain white laminate imitating a painted surface


²⁾ special AntiFinger coating to reduce dirt and fingerprints



FIXED DOOR FRAME


FORTECA

FORTECA RC3 FIXED DOOR FRAME



MASONRY WALL every 40 mm

(the clip-on square not included, charged extra)



Range (mm)
90-130 130-170
170-210 210-250
250-290 290-330 330-370 370-410 410-450

The wall cladding is available with a 6 cm or 8 cm internal angle and with a choice of 6 cm or 8 cm external angle against an extra charge.

ADDITIONAL CHARGES


frame joints at 90 degrees

clip-on square with 60 mm or 80 mm clips NEW (the clip-on square with three clips extends the adjustment range by 20 mm)

cutting the door with the wooden frame to 8 cm in 1 cm increments


side and top panels glued to the wall available (only with a wall installed door frame and an 8 cm square) NEW

headband and quarter round

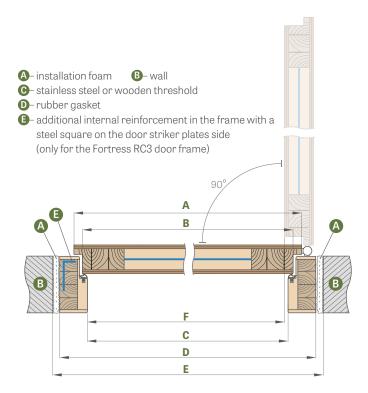


Door Width	A	В	С	D	E	F
"80N"	804	778	764	852	892	759
"80"	848	822	808	896	936	803
"90"	948	922	908	996	1036	903
"100"	1048	1022	1008	1096	1136	1003


FIXED DOOR FRAME



MASKING STRIP



Clip-on SQUARE 6 cm and 8 cm with clips NEW



16

QUARTER ROUND






STEEL DOOR FRAMES

FORTECA

NEW

ADJUSTABLE STEEL DOOR FRAME (OVERLAPPING)

Welded and coated in RAL 9003, 9010, 9016, 8003, 8017, 7016, 7022, 7047,



Door width	A	В	C	D	E	F	G
"80N"	804	778	761	787	877	865	754.5
"80"	848	822	805	831	921	910	798.5
"90E"	960	934	917	943	1033	1022	910
"100" 1)	1048	1022	1005	1031	1121	1110	998.5


"90E" - investment width

FORTECA RC2 ADJUSTABLE STEEL DOOR FRAME
Adjustment Range min-max (mm)
95-125
125-155
155-185
185-215
215-245
245-275
275-305
305-335
335-365

FORTECA RC3 ADJUSTABLE STEEL DOOR FRAME
Adjustment Range min-max (mm)
95-125
125-155
155-185
185-215
215-245
245-275
275-305
305-335
335-365


SQUARE STEEL DOOR FRAME, LARGE VERSION

Welded and coated in RAL 9003, 9010, 9016, 8003, 8017, 7016, 7022, 7047,

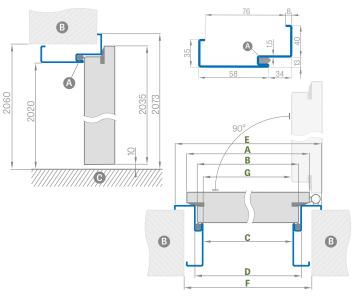

Door width	A	В	C	D	E	F	G
"80N"	804	778	761	787	867	840	754.5
"80"	848	822	805	831	911	885	798.5
"90E"	960	934	917	943	1023	997	910
"100" ¹⁾	1048	1022	1005	1031	1111	1085	998.5

FITTING THE SQUARE FRAME



ADDITIONAL CHARGES

G– Floor

"100" Square frame, large version

door closer reinforcement

stainless steel threshold

cutting the door with the steel frame to 6 cm in 1 cm increments

galvanised sheet steel


non-typical RAL (intensive, pearly and metallic colours not included)





HERSE SET AKUSTIC 39 dB

FRONT DOORS WITH BURGLAR-PROOF LOCKS OR STRIP LOCKS

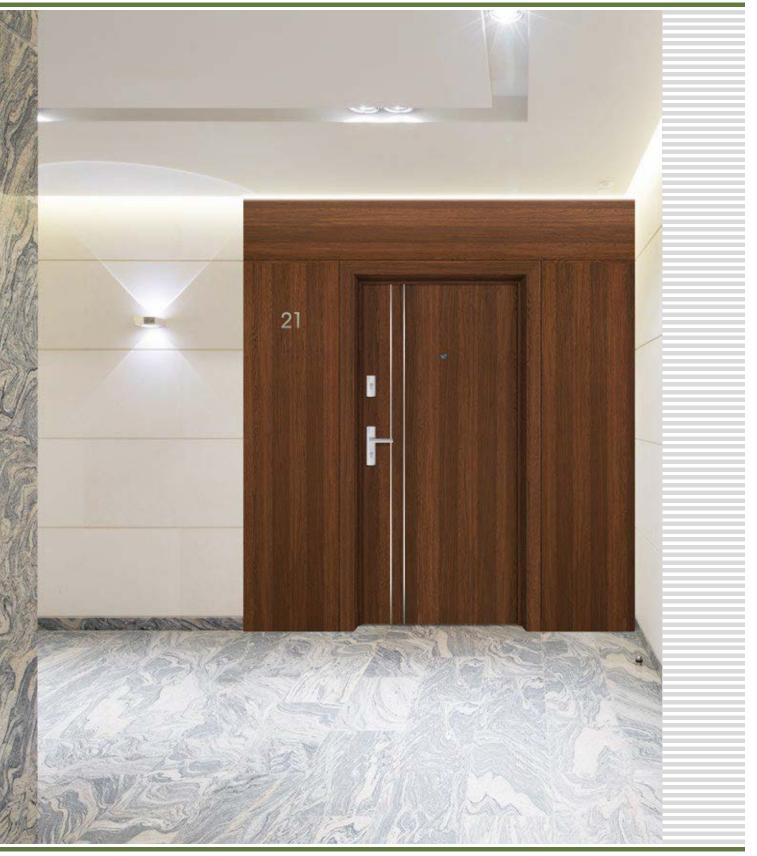

Presented model: HERSE LUX SET 4 in WALNUT GREKO finish with an ESSEN handle



UPPER SECURITY LOCK



LOWER SECURITY LOCK



ADJUSTABLE MAIN KEEPER IN FRAME



ESSEN HANDLE



LEAF 46 mm HERSE SET AKUSTIC 39 dB reinforced with sheet steel



46 mm HERSE SET 32 dB door leaf with channel reinforced





DOOR VIEWER



DROP-DOWN gasket with pressure adjustment



THREE 2-PIN HINGES; Ø16, 3D ADJUSTABLE



3 HINGE BOLTS



FIXED WOODEN DOOR FRAME




HARDWOOD TRESHOLD (lacquer)




STAINLESS STEEL TRESHOLD

HERSE DOOR LEAF CROSS-SECTION









HERSE SET 32dB

HERSE SET AKUSTIC 39 dB

NEW

FRONT DOORS WITH BURGLAR-PROOF LOCKS OR STRIP LOCKS



GOLD PACKAGE SILVER PACKAGE

GENRAL INFORMATION

- HERSE SET Doors are designed for housing and public utility building as an entrance internal door (excluding the "80N" width).
- the HERSE SET leaf with fixed and adjustable door frame with each of threshold available is rated for sound insulation at Rw = 32dB
- HERSE SET Doors in GOLD and SILVER Packages are fully
 preassembled with a threshold fitted, and pre-drilled holes for handle
 and face plate installation for the GOLD version.

CONSTRUCTION

- · timber and MDF stile covered with two HDF boards
- specially designed solid core filling
- · robust steel channel section reinforced
- door leaf thickness of 46 mm
- · additional gasket in the door leaf

FINISHING

- · door leaf edge made in the SOFT or STANDARD technology
- CPL 0.2 & 0.7 laminates available only with the STANDARD edge with the ABS edging in the same colour as the door leaf only or, against an additional charge, with a standard black edge
- 8 mm or 200 mm wide brushed steel, black or OAK CPL inlays flush with the door leaf, on both leaf sides
- the STANDARD edge laminated in the same colour as the door leaf or, optionally, plain black edging (transverse larch, black edge with a transverse structure)

 NEW
- pre-cut up to 8 cm as an option
- · custom order with the lower lock only as an option
- side and top panels glued to the wall (only with the adjustable door frame and an 8 cm square) - page 134

 NEW

HARDWARE

- three silver 2-pin hinges; Ø16; 3D adjustable (2D with a steel frame)
- two 3-pin Class 2 rated security locks with a thumb turn (optionally only lower)
- three hinge bolts on the hinge side
- · possibility to apply an arm door closer
- · lower lock PZ centre is 72 mm
- optionally, a bolt strip lock with two cores, against an extra charge

REBATED FIXED AND ADJUSTABLE DOOR FRAMES

- optionally, an electric door strike can be used in the door frame for the lower lock with no upper lock in the door leaf.
- · adjustable main keeper in frames
- the **80N** NEW width is available on the fixed door frame only

AVAILABLE DOOR LEAF WIDTHS



EDGE FINISH TYPES





GOLD PACKAGE SILVER PACKAGE Door leaf with fixed timber door frame, stainless steel threshold and hardware 4)

DOOR LEAF

Door leaf with fixed timber door frame, stainless steel threshold, w/o hardware 4)

ADDITIONAL CHARGES

door viewer

hardwood threshold (lacquer) for adjustable frames 55 mm or stainless steel threshold with gasket

hardwood threshold (lacquer) for adjustable frames

arm door closer (silver, black, white, brown)

door closer reinforcement

drop-down gasket 2)

cutting the door leaf with a wooden frame up to 8 cm every and up to 6 cm with a steel frame in the CZ standard

black door leaf edge finish

"100" Door leaf or package

30/45 lock core

30G/45 or 30/45G cylinder-holder

 $30/45\,\mathrm{lock}$ core and $30\mathrm{G}/45\,\mathrm{or}\,30/45\mathrm{G}$ cylinder-holder in the master key system

metal covers of the hinge (satin nickel, patina, black)

ESSEN handle (nickel, satin, patina, black)

ESSEN upper face plate (nickel, satin, patina, black)

LUX inlay; available versions p. 80-81


additional charge for HERSE SET AKUSTIC 39 dB door (added to the GOLD and SILVER packages or leaves)

clip-on square, 3 pcs (The clip-on square extends the adjustment range by $20\ \mbox{mm})$

magnetic stop (buffer) 2) NEW (available in six colours p. 132)

multi-point bolt strip lock with two locks



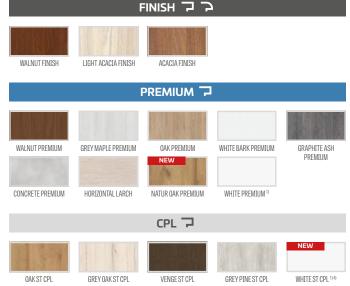

BLACK ST CPL

ASH GREY CPL 0.2 & 0.7 ANTHRACITE CPL 0.2 & 0.7

- 1) plain white laminate imitating a painted surface
- $^{2)}$ the stop prevents application of a drop-down gasket and vice versa

LIGHT-GREY ST CPL⁴⁾

3) available only in STANDARD

CAPPUCCINO ST CPL4

WHITE CPL 0.2 & 0.7

GREKO OAK

 $^{\rm 4)}$ special Anti-Finger coating to reduce dirt and fingerprints





HERSE MAX SET 32dB

HERSE MAX SET AKUSTIC 39 dB

NEW

FRONT DOORS WITH BURGLAR-PROOF LOCKS OR STRIP LOCKS



GENRAL INFORMATION

- HERSE MAX SET Doors are designed for housing and public utility building as an entrance internal door (excluding the "80N" width).
- The HERSE MAX SET leaf with fixed and adjustable door frame with each of threshold available is rated for sound insulation at Rw = 32dB or, against an additional charge, Rw-39dB
- HERSE MAX SET Doors in GOLD and SILVER Packages are complete with a threshold, and have pre-drilled holes for handle and face plate installation for the GOLD version.

CONSTRUCTION

- timber and MDF stile covered with two HDF boards
- · specially designed solid core filling
- · robust steel channel section reinforced
- · door leaf thickness of 46 mm
- · additional gasket in the door leaf

FINISHING

- the STANDARD edge laminated in the same colour as the door leaf or, optionally, plain black edging (transverse larch, black edge with a transverse structure)
- · moulded HDF board covered with PREMIUM laminate
- pre-cut up to 8 cm as an option
- side and top panels glued to the wall (only with the adjustable door frame and an 8 cm square) - page 134

HARDWARE

- three silver 2-pin hinges; Ø16; 3D adjustable
- two 3-pin Class 2 rated security locks with a thumb turn (optionally only lower)
- · three hinge bolts on the hinge side
- · possibility to apply an arm door closer
- · lower lock PZ centre is 72 mm
- · optionally, a bolt strip lock with two cores, against an extra charge


REBATED FIXED AND ADJUSTABLE DOOR FRAMES

- optionally, an electric door strike can be used in the door frame for the lower lock with no upper lock in the door leaf.
- · adjustable main keeper in frames
- The 80N NEW width is available on the fixed door frame only

GOLD PACKAGE SILVER PACKAGE DOOR LEAF

MOULDING





AVAILABLE DOOR LEAF WIDTHS



EDGE FINISH TYPES



GOLD PACKAGE Door leaf with fixed timber door frame, stainless steel threshold and hardware ⁴⁾ **SILVER PACKAGE** Door leaf with fixed timber door frame, stainless steel threshold, w/o hardware ⁴⁾

ADDITIONAL CHARGES

door viewer

black door leaf edge finish

hardwood threshold (lacquer) for adjustable frames 55 mm or stainless steel threshold with gasket

hardwood threshold (lacquer) for adjustable frames

arm door closer (silver, black, white, brown)

door closer reinforcement

drop-down gasket 1)

cutting the door leaf with a wooden frame up to 8 cm every and up to 6 cm with a steel frame in the CZ standard

"100" door leaf or package

30/45 lock core

30G/45 or 30/45G cylinder-holder

30/45 lock core and 30G/45 or 30/45G cylinder-holder in the master

metal covers of the hinge (satin nickel, patina, black)

ESSEN handle (nickel, satin, patina, black)

ESSEN upper face plate (nickel, satin, patina, black)

additional charge for the door HERSE MAX SET AKUSTIC39 dB (added to GOLD and SILVER packages or wing)

clip-on square, 3 pcs (The clip-on square extends the adjustment range $\,$

magnetic stop (buffer) 1) NEW

(available in six colours p. 132)

multi-point bolt strip lock with two locks



HERSE MAX SET 24



HERSE MAX SET 25



HERSE MAX SET 26



HERSE MAX SET 27



HERSE MAX SET 28



HERSE MAX SET 29



HERSE MAX SET 30



HERSE MAX SET 31






FIXED AND ADJUSTABLE FRAMES

HERSE SET, HERSE MAX SET


HERSE SET FIXED DOOR FRAME

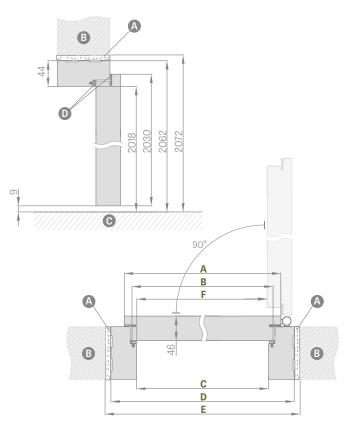

Door width	A	В	С	D	E	F
"80N"	804	777	764	852	872	756
"80"	844	817	804	892	912	796
"90E"	948	921	908	996	1016	900
"100"	1044	1017	1004	1092	1112	996

"90E" - investment width

HERSE SET ADJUSTABLE DOOR FRAME

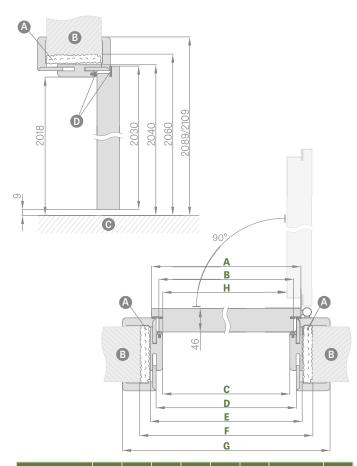


Door width	A	В	С	D	E	F	G	Н
"80"	844	817	804	826	848	888	946*/986**	796
"90E"	948	921	908	930	952	992	1050*/1090**	900
"100"	1044	1017	1004	1026	1048	1088	1146*/1186**	996

^{*} strip 6 cm / ** strip 8 cm







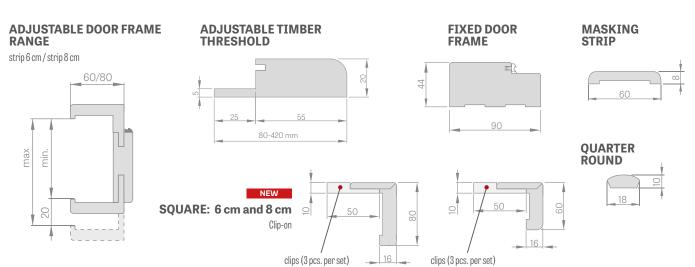

FIXED AND ADJUSTABLE DOOR FRAMES

	Adjustment range min-max (mm)	
	80-100	
	100-120	
	120-140	
	140-160	
nent	160-180	
Component	180-200	
3	200-220	
	220-240	
	240-260	
	260-280	
L	260-300	
	280-300	
S	300-320	
onen	320-340	
z components	340-360	
7 _	360-380	
	380-400	
	400-420	
omponents		

FIXED HARDWOOD TRESHOLD, COLOURLESS LACQUER 55mm



- The fixed frame, architrave and clip-on square in CPL 0.2 are also used in the set for door leaves in CPL 0.7
- Joints at 90 degrees of the adjustable frame possible with the 8 cm architraves only.
- Electric door strike
- Door closer reinforcement for adjustable door frame –
 Square with three clips NEW (square with clips extends the adjustment range by 20 mm)
- Strip and guarter round
- Side and top panels glued to the wall available (only with an adjustable door frame and an 8 cm strip)
- Cutting the door (leaf and frame) up to 8 cm every 1 cm or the product as per the CZ standard




STEEL DOOR FRAMES

HERSE SET, HERSE MAX SET

HERSE SET ADJUSTABLE STEEL DOOR FRAME (OVERLAPPING)

Welded and coated in RAL 9010, 9016, 8003, 8017, 7016, 7047, 1001

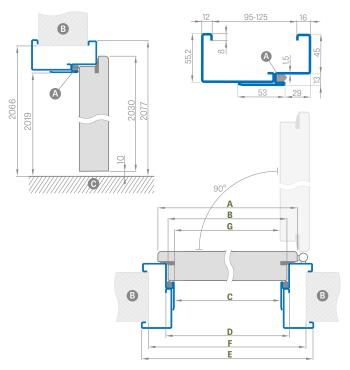

Door width	A	В	C	D	E	F	G
"80N"	804	777	761	787	877	855	756
"80"	844	817	801	827	917	895	796
"90E"	948	921	905	931	1021	999	900
"100"	1044	1017	1001	1027	1117	1095	996


"90E" - investment width

Adjustment Range min-max (mm)
95-125
125-155
155-185
185-215
215-245
245-275
275-305




HERSE SET ADJUSTABLE STEEL DOOR FRAME (OVERLAPPING)

Welded and coated in RAL 9003, 9010, 9016, 8003, 8017, 7016, 7022, 7047, 1001

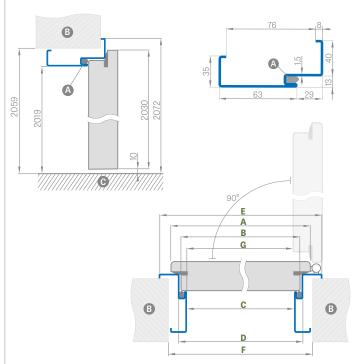

Door width	A	В	C	D	E	F	G
"80N"	804	777	761	787	867	841	756
"80"	844	817	801	827	907	881	796
"90E"	948	921	905	931	1011	985	900
"100"	1044	1017	1001	1027	1107	1081	996

FITTING THE SQUARE FRAME



ADDITIONAL CHARGES

A-gasket

G-floor

"100" Square frame, large version electric door strike door closer reinforcement cutting the door with the steel frame to 6 cm in 1 cm increments stainless steel threshold galvanised sheet steel


non-typical RAL (intensive, pearly and metallic colours not included)



UNITED STEEL DOOR FRAME

HERSE SET, HERSE MAX SET

UNITED STEEL DOOR FRAME DIAGRAM

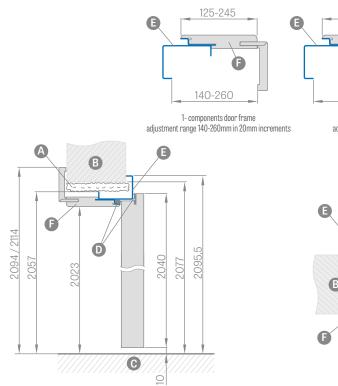

Door width	A	В	C	D	E	F	G	Н
"80"	844	817	791.5	859	933.5 / 973.5	899	790	935
"90E"	960	933	907.5	975	1049.5 / 1089.5	1015	906	1051
"100"	1044	1017	991.5	1059	1133.5 / 1173.5	1099	990	1135


"90E" - investment width

A-installation foam B-wall C-floor D-rubber gasket

E-steel part painted in RAL colour

6-part MDF laminate

	Adjustment range min-max (mm)
П	140-160
t l	160-180
bone	180-200
1 component	200-220
_	220-240
Ц	240-260
Н	260-280
	280-300
nent	300-320
2 Components	320-340
2 Co	340-360
	360-380
Ц	380-400

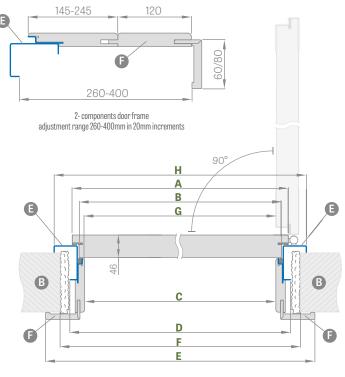

ADDITIONAL CHARGES

electric door strike

door closer reinforcement

shortening of a leaf with a UNITED steel door frame up to 6 cm in 1 cm increments

stainless steel threshold, height: 20 mm

galvanised sheet steel

non-typical RAL (intensive, pearly and metallic colours not included)





LEDA EI30, EI60

FIRE INTERNAL FRONT DOORS MADE IN HALSPAN TECHNOLOGY
















LEDA Type 3 glazing

ADJUSTABLE STEEL DOOR FRAME (OVERLAPPING)

Adjustment Range min-max (mm)
95-125
125-155
155-185
185-215
215-245
245-275
275-305





CPL

 $^{^{\}mbox{\scriptsize 1)}}$ plain white laminate imitating a painted surface

²⁾ special AntiFinger coating to reduce dirt and fingerprints

GENRAL INFORMATION

Fire protection, smoke control and sound insulation are ensured only when a complete doorset is installed, including a fire door leaf (with gaskets, lock, hinges and drop-down gasket pre-assembled), door frame, door closer, as well as a lock core and handle in compliance with the Polish Standard.

The sound insulation of the HALSPAN door system supplied with a drop-down gasket as per PN-B-02151-03:1999 is rated at Rw=32 dB The door leaves are marketed complete with a timber or steel door frame only.

CONSTRUCTION

- filled with a special HALSPAN board with a thickness of 44 mm for Type EI30 and 54 mm for EI60
- · overall door leaf thickness 50 mm in EI30 and 60 mm in EI60
- · softwood door frame
- · fire rated and smoke intumescent door gasket
- · drop-down gasket
- transparent fire-resistant glass; the glass width is fixed (not dependent on) the door leaf width

FINISHING

- leaf edge made in the STANDARD technology (with CPL 0.2 & 0.7 laminates, laminated with the ABS edging in the same colour as the leaf only) or with a standard black edge against an additional charge
- 8 mm or 200 mm wide brushed steel, black or OAK CPL inlays flush with the door leaf, on both leaf sides Applies to LEDA full only.
 Inlay types shown on pages 80-81
- two-sided inlays only in full leaf and on only on the active leaf in double-leaf doors
- the edge laminated in the same colour as the door leaf or, optionally plain black (transverse larch, black edge with a transverse structure)
- side and top panels glued to the wall (only when fitted with an 8 cm square) page 134

 NEW

HARDWARE

- four hinges; Ø16; 3D adjustable (2D for the steel frame)
- · thumb turn cylinder lock
- · door closer against an additional charge

DOOR FRAMES

- · fire rated fixed door frame
- fire rated gasket
- · adjustable door striker plate
- adjustable steel, square large or welded frames in RAL 9010, 8003, 8017, 7035, 7016, 1005
- fixed frame made of black sheet metal, thickness 1.5 mm, RAL powder painted, welded in the corners, fitted with a fire rated gasket and door closer reinforcement as standard.

ADDITIONAL CHARGES

fire rated door closer with scissor arm colours: silver, black, white, brown

fire rated cam-action door closer

(For frames with or without housing with a clip-on square) colours: silver, black, white, brown

fire rated ventilation grille

JOVE INOX handle, long face plate, lock core, see p. 127

30/40 lock core (EI30) or 30/50 (EI60)

fire-proof door viewer, satin, chrome

fire rated upper deadbolt lock

black door leaf edge finish

housing for EI30 from 100 to 460 and housing for EI60 from 120 to 480 every 40 mm double door housing

fire rated electric door strike (standard) 12/24V (not for the steel door frame)

steel door frame in RAL not in the range (intensive, pearl and metallic colours not included)

steel door frame made of galvanised sheet steel

EI30

Extra charge for Type 3, 4, 4, 5, 6, 8 glazing

EI60

Extra charge for Type 4, 6, 8 glazing

LUX INLAY: available versions p. 80-81

(on both sides on a full door leaf, and on an active double-leaf only)

CPL 0.2 laminate (for doors w/o housing)

CPL 0.7 laminate (for doors w/o housing)

clip-on square 1) NEW

(the clip-on square extends the adjustment range by 20 mm)

additional charge for the "110" leaf

side and top panels glued to the wall available (only with a wall installed door frame and an 8 cm square)

NEW






LEDA EI30, EI60

SINGLE-LEAF DOOR


FIXED WOODEN DOOR FRAME



Door width	A	В	C	D	E
"80"	860	817	925	955	805
"90"	960	917	1025	1055	905
"100"	1060	1017	1125	1155	1005
"110"	1160	1117	1225	1255	1105

- A fire-resistant installation foam
- **B** wall
- **G** floor
- D drop-down gasket

FIRE RATED DOOR FRAME CROSS-SECTION IN MASONRY AND WITH CLIP-ON SQUARE




FIRE RATED DOOR FRAME CROSS-SECTION IN BASIC MASONRY



CLIP-ON SQUARE, 6 cm and 8 cm with clips







FIRE RATED FIXED DOOR

DOOR CLOSER TRACK MOUNTED DOOR CLOSER¹⁾




DOOR CLOSER WITH SCISSOR ARM



ADJUSTABLE STEEL FIRE DOOR FRAME (OVERLAPPING)


Welded and coated in RAL 9003, 9010, 9016, 8003, 8017, 7016, 7022, 7047, 1001

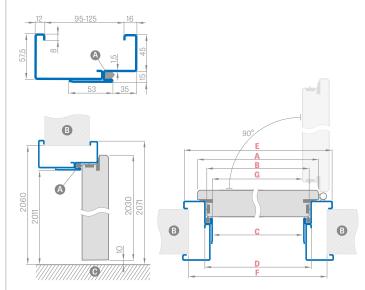

Door width	A	В	C	D	E	F	G
"80"	860	834	813	843	933	910	802
"90"	960	934	913	943	1033	1010	902
"100"	1060	1034	1013	1043	1133	1110	1002
"110"	1160	1134	1113	1143	1233	1210	1102

LARGE STEEL FIRE SQUARE DOOR FRAME (OVERLAPPING)

Welded and coated in RAL 9003, 9010, 9016, 8003, 8017, 7016, 7022, 7047, 1001

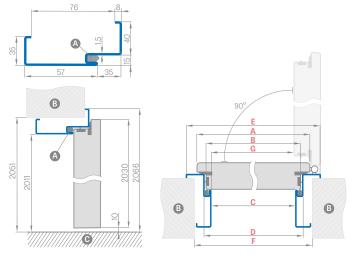

Door width	A	В	C	D	E	F	G
"80"	860	834	813	843	923	890	802
"90"	960	934	913	943	1023	990	902
"100"	1060	1034	1013	1043	1123	1090	1002
"110"	1160	1134	1113	1143	1223	1190	1102

RAL										
RAI 90032)	RAI 9010	RAI 9016	RAI 8003	RAI 8017	RAI 7016	RAI 7022 2)	RAI 7047	RAI 1001		

²⁾ additional charge +10%



LEDA EI30, EI60

DOUBLE-LEAF DOORS







LEDA 6 "90" + passive "80" door leaf



LEDA 4 "90"

+ "40" side panel

LEDA EI30 & EI60 DOUBLE-LEAF DOORS

- The double-leaf doors are made within the LEDA EI30 and EI60 ranges with prices depending on the colour and finish (STANDARD);
- The passive leaf is made in two versions:
 - Plain; widths: "60", "70", "80"
 - glazed in types 5, 6, 7, 8 for EI30 and glazed in types 6 and 8 for EI 60
- Side panel for the widths of "30", "40" and "50"; fully plain in each
- The passive leaf and side panel are supplied with shootbolt locks and bolt keepers; w/o edging strips.

AVAILABLE ACTIVE DOOR LEAF WIDTHS FOR DIFFERENT FIRE DOOR TYPES

LEDA Type 3 glazing EL30 90 100 EL30 EL60 80 90 100

LEDA Type 4 glazing EL30 EL60 90 100

LEDA Type 5 glazing EL30 80 90 100

LEDA Type 6 glazing

EL30 EL60 80 90 100

LEDA Type 7 glazing EL30 80 90 100

LEDA Type 8 glazing EL30 EL60 80 90 100

LEDA Type 6 glazing

AVAILABLE PASSIVE DOOR LEAF WIDTHS FOR DIFFERENT FIRE DOOR TYPES

I FDA LEDA Type 5 glazing EL30 EL60 60 70 80

LEDA Type 7 glazing

EL30 70 80 EL30 EL60 70 80

LEDA Type 8 glazing EL30 70 80 EL30 EL60 70 80

DOUBLE-LEAF DOOR PRICE

The price includes

- Active part = price of full single leaf door, plus possible extra charges as for single leaf doors
- Passive part = price for the full version (also side panel), plus possible extra charges as for single leaf doors

AVAILABLE DOOR LEAF WIDTHS


active leaf 80 90 100 + passive leaf 60 70 80

active leaf 80 90 100 + full, plain side panel 30 40 50

		DOUBLE FIRE DOOR TIMBER DOOR FRAME									
	"110"	"120"	"130"	"140"	"150"	"160"	"170"	"180"			
A Active door leaf width	860	860 960	860 960 1060	860 960 1060	860 960 1060	860 960 1060	960 1060	1060			
B Passive door leaf/Side panel widths	347	447 347	547 447 347	647 547 447	747 647 547	847 747 647	847 747	847			
C Frame opening width	1170	1270	1370	1470	1570	1670	1770	1870			
F Frame outer width	1278	1378	1478	1578	1678	1778	1878	1978			
E Opening width in the wall	1310	1410	1510	1610	1710	1810	1910	2010			

ADJUSTABLE STEEL FIRE DOOR FRAME (OVERLAPPING)


Welded and coated in RAL 9010, 9016, 8003, 8017, 7016, 7047, 1001



Door Width	Α	В	С	D	E	F
"110"	860	347	1166	1196	1270	1287
"120"	860 960	447 347	1266	1296	1370	1387
"130"	860 960 1060	547 447 347	1366	1396	1470	1487
"140"	860 960 1060	647 547 447	1466	1496	1570	1587
"150"	860 960 1060	747 647 547	1566	1596	1670	1687
"160"	860 960 1060	847 747 647	1666	1696	1770	1787
"170"	960 1060	847 747	1766	1796	1870	1887
"180"	1060	847	1866	1896	1970	1987

LARGE STEEL FIRE SQUARE DOOR FRAME (OVERLAPPING)

Welded and coated in RAL 9010, 9016, 8003, 8017, 7016, 7047, 1001




Door Width	Α	В	С	D	E	F
"110"	860	347	1166	1196	1236	1276
"120"	860 960	447 347	1266	1296	1336	1376
"130"	860 960 1060	547 447 347	1366	1396	1436	1476
"140"	860 960 1060	647 547 447	1466	1496	1536	1576
"150"	860 960 1060	747 647 547	1566	1596	1636	1676
"160"	860 960 1060	847 747 647	1666	1696	1736	1776
"170"	960 1060	847 747	1766	1796	1836	1876
"180"	1060	847	1866	1896	1936	1976



HYPERION EI30 RC2 39dB

INTERNAL FRONT FIRE AND BURGLAR-PROOF DOORS MADE IN THE ERKADO TECHNOLOGY

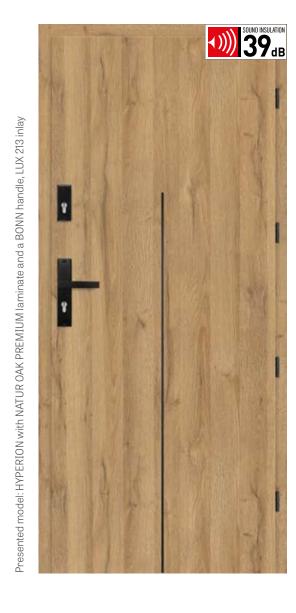

AVAILABLE DOOR LEAF WIDTHS

GREY OAK ST CPL



OAK ST CPL

NEW

DOOR LEAF WITH FIXED TIMBER DOOR FRAME

HYPERION EI30 Leaf + fixed timber door frame									
"80"	"90"	"100"							

CPL

VENGE ST CPL

GREY PINE ST CPL

WHITE ST CPL 1) 2)



CAPPUCCINO ST CPL²⁾ LIGHT-GREY ST CPL²⁾ BLACK ST CPL²⁾ OAK CPL 0.2 & 0.7 WHITE CPL 0.2 & 0.7 ASH GREY CPL 0.2 & 0.7 ANTHRACITE CPL 0.2 & 0.7 (charged extra) (charged extra) (charged extra) **PREMIUM** GRAPHITE ASH PREMIUM WALNUT PREMIUM GREY MAPLE PREMIUM OAK PREMIUM WHITE BARK PREMIUM CONCRETE PREMIUM HORIZONTAL LARCH NATUR OAK PREMIUM WHITE PREMIUM 1)

 $^{^{\}rm 1)}$ plain white laminate imitating a painted surface

²⁾ special AntiFinger coating to reduce dirt and fingerprints

GENRAL INFORMATION

Fire protection, smoke control and sound insulation are ensured only when a complete doorset is installed, including a fire door leaf (with gaskets, lock, hinges and drop-down gasket pre-assembled), door frame, door closer, as well as a lock core and handle in compliance with the Polish Standard.

The sound insulation of the door with a drop-down gasket as per PN-B-02151-03:1999 is rated at Rw=39 dB

The door leaves are sold complete with a wooden door frame only.

The doors have an anti-burglary RC2 certificate for inward opening doors.

CONSTRUCTION

- special 44 mm thick filling
- total door leaf thickness of 50 mm
- softwood door frame
- fire rated and smoke intumescent door gasket
- drop-down gasket

FINISHING

- leaf edge made in the STANDARD technology (with CPL 0.2 & 0.7 laminates, laminated with the ABS edging in the same colour as the leaf only) or with a standard black edge against an additional charge
- 8 mm or 200 mm wide brushed steel, black or OAK CPL inlays flush with the door leaf, on both leaf sides NEW
- the edge laminated in the same colour as the door leaf or, optionally plain black (transverse larch, black edge with a transverse structure)
- side and top panels glued to the wall (only when fitted with an 8 cm square) - page 134 NEW


HARDWARE

- four hinges; Ø16; 3D adjustable
- multi-point bolt strip lock with two locks
- door closer against an additional charge


DOOR FRAMES

- fixed wooden fire protection door frame optionally with cladding
- fire rated gasket
- adjustable door striker plate

FIRE RATED DOOR FRAME **CROSS-SECTION** IN MASONRY AND WITH **CLIP-ON SQUARE**



FIRE RATED DOOR FRAME **CROSS-SECTION IN BASIC MASONRY**



CAM-ACTION DOOR CLOSER 2)

(silver, black, white, brown)



ARM DOOR CLOSER

(silver, black, white, brown)



ADDITIONAL CHARGES

fire rated door closer with scissor arm colours: silver, black, white, brown

fire rated cam-action door closer

(For frames with or without housing with a clip-on square) colours: silver, black, white, brown

BONN handle, long face plate, lock core, see p. 127

BONN face plate (page 127)

core 30/40 (EI30)

fire-proof door viewer, satin, chrome

black door leaf edge finish

cladding for EI30 from 100 to 480 mm

LUX inlay; available versions p. 80-81

CPL 0.2 laminate (for doors w/o housing)


CPL 0.7 laminate (for doors w/o housing)

clip-on square 1) NEW

(the clip-on square extends the adjustment range by 20 mm)

side and top panels glued to the wall available (only with a wall installed door frame and an 8 cm square)

FIXED WOODEN DOOR FRAME

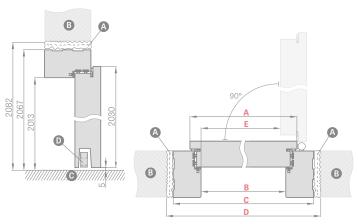

Door width	A	В	C	D	E
"80"	860	817	925	955	805
"90"	960	917	1025	1055	905
"100"	1060	1017	1125	1155	1005



CLIP-ON SOUARE.


6 cm and 8 cm with clips

clips (3 pcs. per set)









¹⁾ in the version with housing, the clip-on square is included ²⁾ use the cam-action door closer for a fixed door frame only or for frames with a clip-on square





The handle not to be used for panel door leaves with casing frames, see p. 158

NEW

RUMBA handle with antibacterial coating with active silver ions

black matt



black matt



key face plate face plate anti-bacterial toilet sign knob





NEW

METAL-BUD LUNA PREMIUM handle, SQUARE

glossy chrome, brushed matt chrome, glossy brass, black matt

Metal-Bud

PRODUCENT KLAMEK



Glossy chrome



brushed matt chrome



glossy brass



black matt





















HANDLE CLASS **PREMIUM**



METAL-BUD LUNA PREMIUM handle, ROUND

glossy chrome, brushed matt chrome, glossy brass, black matt





glossy chrome



brushed matt chrome



glossy brass



black matt













HANDLE CLASS
PREMIUM













key face plate face plate face plate for toilet door

The handle not to be used for panel door leaves with casing frames, see p. 158

NEW

METAL-BUD CUBE SLIM handle (face plate width 6 mm)

Metal-Bud PRODUCENT KLAMEK

glossy chrome, brushed matt chrome, glossy brass, black matt







glossy chrome

brushed matt chrome

glossy brass

black matt















HANDLE CLASS
PREMIUM

key face plate face plate face plate for toilet door

METAL-BUD CUBE handle

glossy chrome, brushed matt chrome, brushed matt nickel, black matt







brushed matt chrome



brushed matt nickel



black matt



glossy chrome

















key face plate face plate face plate for toilet door

METAL-BUD CUBE PREMIUM handle

glossy chrome, brushed matt chrome, brushed matt nickel, black matt



glossy chrome



brushed matt chrome



brushed matt nickel



black matt































key face plate face plate face plate for toilet door

The handle not to be used for panel door leaves with casing frames, see p. 158

NEW

METAL-BUD BELLA SLIM SQUARE (prestige face plate of 6 mm in thickness)

Metal-Bud PRODUCENT KLAMEK

HANDLE CLASS
PREMIUM

glossy chrome, brushed matt chrome, glossy brass, black matt









glossy chrome

brushed matt chrome

glossy brass

black matt



















METAL-BUD BELLA SLIM ROUND (prestige face plate of 6 mm in thickness)

glossy chrome, brushed matt chrome, glossy brass, black matt









glossy chrome

brushed matt chrome

glossy brass

black matt















key face plate face plate face plate for toilet door



Nickel satin, graphite/chrome, glossy chrome



Nickel satin



Graphite/chrome



glossy chrome

























key face plate face plate face plate for toilet door

The handle not to be used for panel door leaves with casing frames, see p. 158

METAL-BUD DECO texture handle

glossy chrome, nickel satin





decor: MEDIUM GREKO OAK



decor: GREKO SONOMA



decor: SANREMO GREKO



decor: BLACK



decor: GREKO WALNUT



decor: WHITE GREKO



decor: GREKO OAK

METAL-BUD IBIZA handle

glossy chrome, nickel satin, graphite/chrome, white matt, black matt



glossy chrome



White matt



Graphite/chrome



black matt



nickel satin

METAL-BUD LINEA handle

Glossy chrome, graphite/chrome, nickel, satin



glossy chrome



Graphite/chrome



nickel satin

FACE PLATE glossy chrome, nickel satin, graphite/chrome, white matt, black matt for the DECO, IBIZA, LINEA models

































The handle not to be used for panel door leaves with casing frames, see p. 158

NEW

METAL-BUD QUBIK handlenickel velvet, chrome glossy, white matt, black matt

Metal-Bud PRODUCENT KLAMEK



NEW

QUBIK handle nickel, velvet



QUBIK handle chrome glossy



QUBIK handle, white matt



QUBIK handle, black matt

METAL-BUD BARCELONA handle

nickel, velvet, glossy chrome, black matt



BARCELONA handle nickel, velvet



BARCELONA handle glossy chrome



BARCELONA handle, black matt

FACE PLATE nickel, velvet, glossy chrome, white matt, black matt for the QUBIK, BARCELONA models

















stainless steel







face plate











Key face plate



Key face plate









face plate for toilet door



face plate for toilet door

The handle not to be used for panel door leaves with casing frames, see p. 158

METAL-BUD ERKADO handle black matt



TOPAZ handle, black matt



face plate



Key face plate



face plate for toilet door

METAL-BUD SIRIUS handle

black matt



SIRIUSZ handle, black



face plate



Key face plate



face plate for toilet door

NEW

APRILE handles

polished chrome, satin chrome, black, gold, matt gold, copper



PINA handle, polished chrome



PINA handle chrome, satin



PINA handle, black



PINA handle gold



PINA handle, matt gold



PINA handle, copper



JUKA handle, polished chrome



JUKA handle chrome, satin



JUKA handle, black

FACE PLATE polished chrome, satin chrome, black, gold, matt gold, copper for PINA, JUKA models



face plate,



face plate for toilet door



face plate,







face plate for toilet door

























face plate,

face plate for toilet door



face plate for toilet door

The handle not to be used for panel door leaves with casing frames, see p. 158

GAMET handles

brushed chrome, glossy chrome, brushed nickel, antique brass



MISTICO handle glossy chrome



MISTICO handle brushed nickel











face plate for key and lock core face plate for toilet door



ERBA handle brushed nickel



FRBA handle antique brass











face plate for key and lock core face plate for toilet door



CASCADA handle brushed nickel



CASCADA handle antique brass











NEW

QUBIK handle long face plate

Key face plate

face plate for key and lock core face plate for toilet door

HANDLES FOR PLATE, STILE LEAVES, WITH LONG FACE PLATE

The handle not to be used for panel door leaves with casing frames, see p. 158 (DOES NOT APPLY TO SYDNEY and QUBIK handles, long face plate). The handles with a long face plate are not to be used for non-rebated doors

METAL-BUD ASTRA, SYDNAY and QUBIK handles, long face plate, spacing 72 mm

- the SYDNEY and QUBIK handles not to be used for panel door leaves with casing frames, see p. 158



nickel, patina













QUBIK handle, black face plate



QUBIK handle, black face plate for toilet door



ASTRA and SYDNEY handles, nickel, patina face plate for toilet door



ASTRA handle, nickel, satin face plate



ASTRA handle, nickel, satin face plate, economy

HANDLES FOR PLATE, STILE LEAVES, WITH LONG FACE PLATE

The handle not to be used for panel door leaves with casing frames, see p. 158

(DOES NOT APPLY TO SYDNEY and QUBIK handles, long face plate). The handles with a long face plate are not to be used for non-rebated doors (see p. 132)

NEW

METAL-BUD JOVE INOX handles, long face plate (10 mm thick)

Metal-Bud PRODUCENT KLAMEK

CERTIFIED FOR USE IN LEDA EI30 AND EI 60 FIRE AND FRONT DOORS

Stainless steel, investment









METAL-BUD TOPAZ INOX handle, long face plate (10 thick), spacing 72 mm

stainless steel









HANDLES FOR HERSE SET, HERSE LUX SET, HERSE MAX SET

 $handle\ METAL-BUD\ ERKADO\ BONN\ and\ ESSEN\ (face\ plate\ thickness\ ESSEN\ -10\ mm,\ BONN\ -8\ mm),\ spacing\ 72\ mm$













ESSEN handle and face plate

LOCK CORES





Lock core with thumbturn Nickel satin

Lock cores in the master key system 30/45 + 30G/45 Outwards opening doors	
Lock cores in the master key system 30/45 + 30/45G Inwards opening doors	

LOCK CORE	LOCK CORE WITH Thumbturn
Size	Size
26/36	G30/40
30/30	G40/30
30/45	G30/50
30/50	G50/30
	30/45G
	30G/45




₽


TECHNICAL INFORMATION

DOOR OPENING DIRECTIONS










REBATED, NON-REBATED, REVERSE DOORS

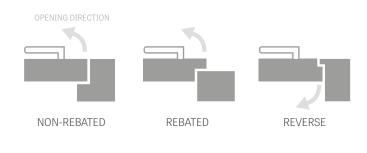


DOUBLE DOORS



DOOR FRAME JOINTS



HOW TO SELECT A LOCK CORE



Example of calculating the lock core size for the flush and stile doors (40mm) with the face plate thickness of G = 7 mm $\,$


A/B = (C+G+3)/(D+G+3)A/B = (15+7+3)/(25+7+3)

A/B = 25/35

Door type	Door leaf thickness	Proportion of lock setting in door (C/D)	Recommended lock core size (A/B)*
Flush, stile (rebated)	40 mm	15/25	26/36
Flush, stile (non-rebated)	40 mm	20/20	30/30
HERSE	46 mm	15/31	30/45
LEDA EI 30	50 mm	19/31	30/40
LEDA EI 60	60 mm	19/41	30/50
FORTECA RC2 & RC3	46 mm	20/26	30/40
HYPERION EI30 RC2	50 mm	19/31	30/40

^{*} Recommended lock core size for the escutcheon thickness of 7 mm and play of 2 mm to 4 mm

HOW TO CALCULATE DOOR PRICE

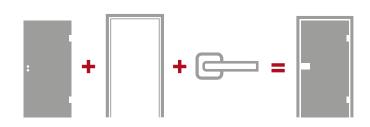

AVAILABLE SOLUTIONS (pp. 135-143)

wall-mounted sliding door systems, single door	SPIN
wall-mounted sliding door systems, double-leaf doors	SP2N
pocket sliding door systems, single-leaf doors	SPIC
pocket sliding door systems, double-leaf doors	SP2C
supplementary system ZN1	ZN1
supplementary system ZN2	ZN2
double-leaf doors	

FINISH

The Finish laminate is pre-impregnated, which means printing and then coating with paint with required properties. Using the performance finishing coats adds to the surface's basic resistance.

GREKO

The Greko laminate is also pre-impregnated, which means printing and then coating with paint with required properties. Using the performance finishing coats adds to the surface's resistance and flexibility of the product. The paint's silicon content ensures the film resistance is enhanced.

The Greko laminate is manufactured on a high density Japanese base layer which is not resin coated. This makes the film ecological, healthy and safe for people and environment both in the production process and during use, as well as for disposal. No formaldehyde or other harmful ingredients is used.

Its distinctive patterns are what distinguishes the Greko film. The laminates bear striking resemblance to wood, as the high quality surface comes with a 3D natural wood effect. Woodgrain decors look just like wood

PREMIUM

The Premium laminate is a product based on Polypropylene (PP), a material of very high resistance to abrasion and scratching, plus top quality appearance. It adds a refined looks and individual character to the doors, as it imitates natural wood perfectly.

Not only does the Premium laminate attracts with its appearance but with its functionality, as it resists scratching better than average products and is fire-retardant and abrasion resistant.

These properties ensure the extended longevity and maintenance-free use of the PREMIUM range products even in most adverse conditions.

ST CPL, CPL 0,2 and CPL 0,7

The CPL laminate is composed of a decorative layer impregnated in resins, and a base layer ensuring flexibility. Following the lamination process, the top resin layer is hardened for high resistance to scratching and abrasion. It is characterised by high resistance to impact, abrasion, scratching, heat and UV radiation

Thanks to using this type of material, the door can be installed in so-called "difficult" interiors [exposed to heat, moisture or extraordinary use]. Approx. laminate thickness: ST CPL - 0,15 mm, CPL 0,2 - 0,2 mm and CPL 0 CPL 0,7 - 0,7 mm. The CPL 0.7 laminate is used to cover only one leaf plane thanks to its unique hardness. The CPL 0,2 and CPL 0,7 laminated door leaves come with the leaf edge made of the so-called ABS, a highly durable PVC.

ST CPL laminate in decors white, light grey, cappuccino, black has been refined in the AntiFinger coating limiting dirt and fingerprints.

UV VARNISH

The door surface has several coats of the WHITE TITANIUM UV modern UV hardened varnish.

The flat surfaces are covered with a specialist base membrane in the first phase, and then coated twice with a top quality paint and hardened with UV.

The moulded surfaces cannot be covered with the membrane for technological reasons, so they are coated with three paint layers and hardened with UV.

The fully automatic coating process follows scanning to ensure ideal quality of the surface. Hardening the paint with the cutting-edge method involving UV light source ensures very high mechanical resistance.

EDGE FINISH TYPES

EDGE **SOFT**







The SOFT door leaf comes with a chamfered edges, which lends an aesthetic and modern look to it. The leaf is finished with a laminate of an improved resistance to scratching, which dramatically enhances its resistance during use.



STANDARD EDGE




It involves covering the flat plane with the 0.15 mm ST CPL laminate, CPL 0.2, CPL 0,7 laminates, polypropylene PREMIUM laminate, GREKO laminate or FINISH film.

The door leaf made in STANDARD technology has unchamfered edges, which is where the face panel is joined with edging laminate, as shown in the diagram. The laminate in the CPL 0.2 and CPL 0,7 laminates is made of very durable PVC, the so-called ABS. The joining method of the laminate is also identical for the non-rebated doors and non-rebated sliding systems.



STILE DOOR LEAF

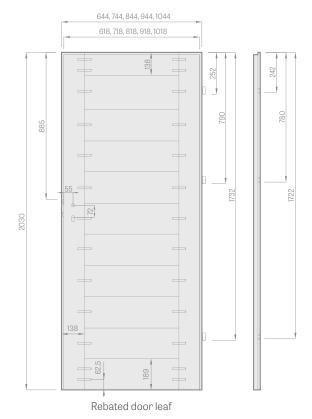



- A MDF or timber stiles in PREMIUM laminate
- B MDF rails



Solid 35 mm or 22 mm thick rail



Aesthetic frameless tongueand-groove glazing without bars




MDF stile for GREKO and CPL laminates with the AntiFinger coating NEW




coating

PANEL DOOR LEAF

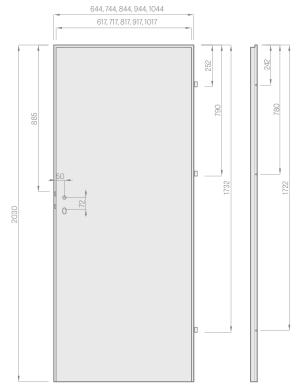

Rebated door leaf



- A MDF board; B gasket; C HDF board; D filling;
- MDF or timber stiles in Herse SET and UNO PREMIUM

FILLING TYPES






solid core filling




Glulam timber stile for PREMIUM and Honeycomb and solid core filling in the panel doors ONLY. CPL surfaces without the AntiFinger For the flush doors we add a third hinge as standard.


GRAF GLASS PANEL


FIRE DOOR LEAF

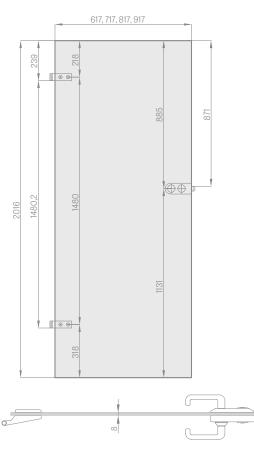

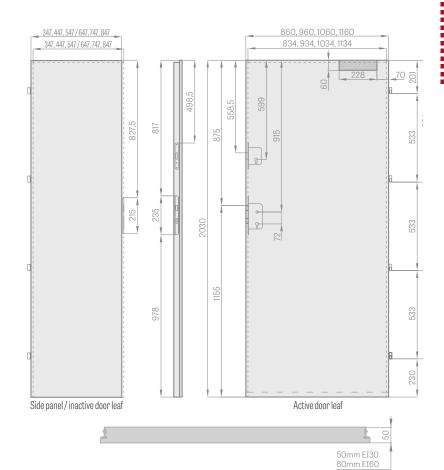

BATHROOM TURN & RELEASE





A Corridor; B Bathroom; C Wall

Bathroom lock - for turn and release locks, select:

OUTSIDE lock - with the bathroom turn and release is fitted to

the outside of the door (Z)

- with the bathroom turn and release is fitted to INSIDE lock

the inside of the door (W)

NOTE: Directions for the turn and release locks apply (R/L)



Specially designed HALSPAN

board filling

44 mm [EI30] /

drop-down gasket with pressure adjustment by Allen key



Fixed door frame




Fire rated and smoke intumescent door gasket in red or black

STANDARD OBVERSE GLAZING



MADE TO ORDER REVERSE GLAZING:



G plain side; M ornamented matt side;



Useful four hinges; ∅16, 3D adjustable

CONCEALED MAGNETIC STOPS NEW



chrome glossy, chrome satin, brass glossy, colourless, white semi-matt, black semi-matt

We assemble the magnetic door stop in a special place milled for this purpose on our own.

Product delivered as a separate assortment.

Caution (important information in case of underfloor heating): the floor element should be placed in the \varnothing 14mm hole, 45 mm deep.

METAL CAPS FOR HINGES



Brushed nickel, patina, glossy chrome, glossy brass, white matt and black matt

Cap sizes:

- ID 16 mm for HERSE SET and FORTECA door types and fire-rated LEDA AND HYPERION
- ID 15 mm for panel and stile doors
- length 47 mm

VENTILATION



Plastic sleeves for FINISH colour group

Plastic woodgrain sleeves for STILE doors with GREKO, PREMIUM and CPL decors




Square and round metal sleeves



Grilles

VENTILATION

Ventilation door cut not available in non-rebated door leaves for wall-mounted and pocket sliding doors.



ELECTRIC DOOR STRIKE

(Available for fixed and adjustable door frames for rebated doors, see p. 161-163, but unavailable for the door frames used with the GRAF glass panes and double-leaf doors)



Types of electric door strikes:

- basic 12 V - switch operated 24 V - basic 24 V - reverse 12 V - reverse 24 V

BASIC - no SWITCH OPERATED - sa

– normally closed, and opened when voltage is fed

- same operation as in the basic strike, but with an option to be switched off by moving the springbolt

REVERSE - closed when voltage is fed, opened when not

The reverse and switch operated electric door strikes unavailable for

the fire doors

CUTTING THE DOOR LEAVES

Cutting the door leaves to size by customer acc. to Polish standard, up to 50 mm, or up to 80 mm for the HERSE SET door leaves (unless pre-cut), as well as in the panel door leaves, is possible if an additional lower strip has been fitted by the manufacturer.

(NOTE: cutting the door leaves to size by customer is not allowed for the FRAGI doors, double-leaf and fire doors, non-rebated leaves for sliding systems, glass GRAF doors, FORTECA RC2 and FORTECA RC3 burglar-proof doors, and stile doors acc. to the CZ standard).


The door leaf height made acc. to the so-called CZ standard is lower than the PL standard by $47\,\mathrm{mm}$.

CLEANING, REVITALISATION & REGENERATION KIT FOR OTTI-MO DOORS



HARDWARE

DEADBOLT LOCKS



LOCK PZ CENTRES:

- 1. For rebated door leaves, the PZ centre of the key operated deadbolt lock, toilet lock and core lock is 72 mm.
- 2. For non-rebated and reverse door leaves, the PZ centre of the magnetic lock is:
 - -90 mm (key operated and toilet locks)
 - -85 mm (core locks)

The toilet locks have a square-shaped bolt hole:

- -acc. to PL standard: 4 mm
- -acc. to CZ standard: 6 mm

STANDARD "OBVERSE" GLAZING

"REVERSE" GLAZING MADE TO ORDER



• plain side (M) matt side with decoration or colourless side with decoration

FROSTED and BLACK VSG 221, 331, 441 LAMINATED GLASS

for STILE and panel doors



CLEARANCE UNDER DOOR LEAF AFTER INSTALLATION

Please check the lower clearance dimensions on all products prior to installation, as the allowable deviation due to frame dimensional tolerance is +- 3mm

GLAZING TRANSLUCENCY ILLUSTRATION



GRAF 1 tempered, painted glass



GRAF 12 tempered, painted glass



GRAF 8 decormat



GRAF 9 transparent



GRAF 26 dark grey



GRAF 29 laminated glass



Tempered glass decormat frosted



Transparent tempered glass



Black VSG



Frosted VSG

FACTORY-DRILLED HANDLE OPENINGS NEW



Drilling of openings for the handle in stile doors in the PREMIUM and ST CPL laminates for handles with a split face plate available in the Erkado offer.

NON-REBATED HARDWARE



Concealed hinge




Magnetic catch



Adjustable magnetic catch strike

INSTALLATION OF FRAME FOR NON-REBATED DOOR FRAMES



 $oldsymbol{A}$ Drill holes for metal screws of min length 80 mm x \varnothing 6 mm

Apart from installation foam, mounting anchors are required when installing the door frame. Drill the holes for screws under the gasket so that it hides them.



Concealed hinge, black



Magnetic lock, black



Adjustable magnetic catch strike, black





Door leaf flush with the frame




DOOR FRAME EXTENSION PANELS

WALL-MOUNTED





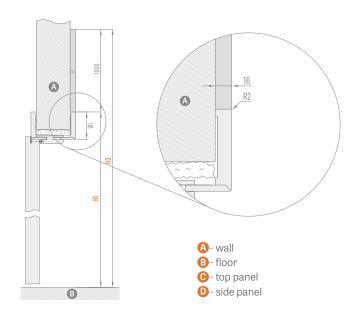

INTE	RNA	LDOC	DRS 1)				
Frame type	H1	Н3	Width	S 1			
			"60"	786			
Adiantalila da o Casas			"70"	886			
Adjustable door frame rebated	2109	3109	"80"	986			
Tobacou			"90"	1086			
			"100"	1186			
			"60"	811			
Adiantalia da o Casa			"70"	911			
Adjustable door frame NON-REBATED	2122	3122	"80"	1011			
11011 1125/1125			"90"	1111			
			"100"	1211			
	2122		"60"	791			
DEVEDOS DOOD EDAME		3122	"70"	891			
REVERSE DOOR FRAME (flush side with the leaf)			"80"	991			
(nach chac men enc roar)			"90"	1091			
			"100"	1191			
			"60"	834			
			"70"	934			
REVERSE DOOR FRAME	2144	3144	"80"	1034			
			"90"	1134			
			"100"	1234			
TOP PANEL (1000 x S1) 1)							

FROM 1 DOOK (pariets on the staffcase side door operfing inwards)											
Frame type	H1	H3	Width	S1			S	3			
			"80"	986	1186	1236	1286	1386	1486	1586	
Adjustable door frame HERSE	2109	3109	"90"	1086	1286	1336	1386	1486	1586	1686	
HEROE			"100"	1186	1386	1436	1486	1586	1686	1786	
			"80N"	1012	1212	1262	1312	1412	1512	1612	
Fixed door frame	2142	3142	"80"	1052	1252	1302	1352	1452	1552	1652	
HERSE "clip"	2142	3142	"90"	1152	1352	1402	1452	1552	1652	1752	
			"100"	1252	1452	1502	1552	1652	1762	1852	
			"80N"	1012	1212	1262	1312	1412	1512	1612	
Fixed door frame	2147	3147	"80"	1056	1256	1306	1356	1456	1556	1656	
FORTECA "clip"			"90"	1156	1356	1406	1456	1556	1656	1756	
			"100"	1256	1456	1506	1556	1656	1756	1856	
	2136		"80N"	990	1190	1240	1290	1390	1490	1590	
Adjustable fixed frame FORTECA		3136	"80"	1034	1234	1284	1334	1434	1534	1634	
(on the panels side)		3130	"90"	1134	1334	1384	1434	1534	1634	1734	
(, , , , , , , , , , , , , , , , , , ,			"100"	1234	1434	1484	1534	1634	1734	1834	
F1 11 6				"80"	1085	1285	1335	1385	1485	1585	1685
Fixed door frame LEDA. HYPERION "clip"	2147	3147	"90"	1185	1385	1435	1485	1585	1685	1785	
LLDA, IIII LIMON GIIP			"100"	1285	1485	1535	1585	1685	1785	1885	
Adjustable fixed frame			"80"	1063	1263	1313	1363	1463	1563	1663	
LEDA, HYPERION	2136	3136	"90"	1163	1363	1413	1463	1563	1663	1763	
(on the panels side)			"100"	1263	1463	1513	1563	1663	1763	1863	

FRONT DOOR (nanels on the staircase side door opening inwards

PANEL 200 PANEL 250 PANEL 300 2 X 2 X 2 X PANEL 250 PANEL 300

SINGLE-FACE SIDE PANEL DOUBLE-FACE SIDE PANEL

DOOR FRAME EXTENSION PANELS 2)

FINISH / GREKO

CPL0,2, ST CPL and PREMIUM

PAINTED

 $^{^{1)}}$ only top panels are available for interior door frames


 $^{^{\}rm 2)}$ the panels shall be edged on all four edges in a colour similar to that of the panel surface



SLIDING SYSTEMS

WALL-MOUNTED

WALL-MOUNTED SLIDING DOOR SYSTEM:



Price includes:

Aluminium track with a cover profile and door stop in the colour of the door leaf and length:

- · 210 cm for "100" leaves
- 200 cm for "90" leaves
- 180 cm for "80" leaves
- 150 cm for "70" "60" leaves

Available wall-mounted sliding system sets

- track with a cover profile and door stop with gasket (only SP1Nz & SP1Nb)
- track with a cover profile and tunnel door frame (only for SP2N)
- track with a cover profile and door stop + tunnel door frame (only SP1Nz & SP1Nb)
- track with a cover profile and door stop with gasket + tunnel door frame (only SP1Nz & SP1Nb)

The non-rebated door leaf for wall-mounted sliding system cannot be cut to size.

The cover profile is neither laminated nor paint coated on the inside.

ADDITIONAL CHARGES

tunnel type adjustable door frame for the price of the adjustable door frame

hook bolt lock with hardware

only for the single system

oval, rectangular or **round** pull handle; glossy chrome, brushed chrome, glossy brass, black matt; two pcs. of pull handles per set

synchronisation

simultaneous opening and closing of the door leaves using only one leaf; only for $\ensuremath{\mathsf{SP2N}}$

soft closing damper

automatic leaf damping during the final closing phase only for SP1Nz and SP1Nb

ROUND, OVAL AND RECTANGULAR PULL HANDLES

glossy chrome, brushed chrome, glossy brass, black matt



HOOK BOLT KEY LOCKS

glossy chrome, brushed chrome, glossy brass, black matt




Key only in silver

The hook bolt key lock comes with two pull handles to choose



WITH DOOR OPENING HOUSING

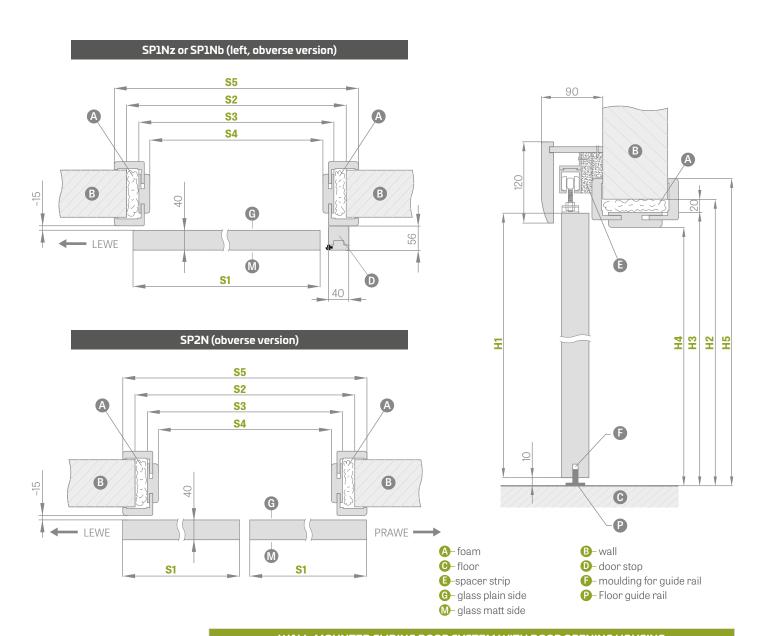

			WALL-MOUNTED SLIDING DOOR SYSTEM WITH DOOR OPENING HOUSING									
			SINGLE-LEAF DOORS					DOUBLE-LEAF DOORS				
		"60"	"70"	"80"	"90"	"100"	"60" x 2	"70" x 2	"80" x 2	"90" x 2	"100" x 2	
S1	Door leaf width	644	744	844	944	1044	1288	1488	1688	1888	2088	
S2	Opening width in the wall	688	788	888	988	1088	1288	1488	1688	1888	2088	
S3	Frame outer width	648	748	848	948	1048	1248	1448	1648	1848	2048	
S4	Frame opening width	604	704	804	904	1004	1204	1404	1604	1804	2004	
S5	Frame cover width Architraves 6 cm/Architraves 8cm	746 / 786	846 / 886	946 / 986	1046 / 1086	1146 / 1186	1346 / 1386	1546 / 1586	1746 / 1786	1946 / 1986	2146 / NA	
H1	Door leaf height	2030	2030	2030	2030	2030	2030	2030	2030	2030	2030	
H2	Opening height in the wall	2060	2060	2060	2060	2060	2060	2060	2060	2060	2060	
Н3	Frame outer height	2040	2040	2040	2040	2040	2040	2040	2040	2040	2040	
Н4	Frame opening height	2018	2018	2018	2018	2018	2018	2018	2018	2018	2018	
Н5	Frame cover height strip 6 cm /strip 8cm	2089 / 2109	2089 / 2109	2089 / 2109	2089 / 2109	2089 / 2109	2089 / 2109	2089 / 2109	2089 / 2109	2089 / 2109	2089 / NA	



LOFT STANDARD TYPE



Leaf BALDUR 7, laminate WHITE TITAN UV, black rectangular handle, handles INDUSTRIAL


The LOFT STANDARD single sliding system is available with all leaves in the SP1Nb standard wall mounted sliding system.

Double sliding system LOFT STANDARD consists of two single systems and a connecting element for rails.

Double LOFT STANDARD system is counted as 2 x single system + connecting element for rails. Choice of two handles holding the leaf: INDUSTRIAL and RETRO (page 138).

door closer on one side

connector for tracks (enables the use of the LOFT system in the double-leaf system)



		"60"	"70"	"80"	"90"	"100"
S1	Door leaf width	644	744	844	944	1044
S2	Opening width in the wall 1)	574	674	774	874	974
H1	Door leaf height	2030	2030	2030	2030	2030
H2	Opening height in the wall	1962	1962	1962	1962	1962
Н3	Overall system height	2170	2170	2170	2170	2170

GUIDE RAIL FOR SINGLE SYSTEM LENGTH:

- 200 cm for "60" "70" "80" leaves - 250 cm for "90" "100" leaves

B 52	\$2	S2
E	유	0

		"120"	"140"	"160"	"180"	"200"
S1	Door leaf width	2 x 644	2 x 744	2 x 844	2 x 944	2 x 1044
S2	Opening width in the wall 1)	1202	1402	1602	1802	2002
S3	Guide width	1500	1500	2000	2000	2200
S4	Total guide width 2)	3000	3000	4000	4000	4400
H1	Door leaf height	2030	2030	2030	2030	2030
H2	Opening height in the wall	1962	1962	1962	1962	1962
Н3	Overall system height	2170	2170	2170	2170	2170

B-wall C-floor D-wall mounted buffer



 $^{^{\}mbox{\tiny 1)}}$ the leaf in the closed position overlaps 35 mm on each side

 $^{^{\}rm 2)}$ a guide for double-leaf system consists of two guides connected with a connector



LOFT Type



LOFT TILES, laminate OAK ST CPL, round handles, RETRO handles

LOFT Type wall-mounted sliding door system is available in black and comes complete with the LOFT Type plain door leaf. The LOFT door leaf comes with the stabilising "honeycomb" filling as standard or solid core for extra charge. The door leaf features a non-rebated edge. The system is designed for clear finished opening, without a tunnel.

The complete system includes the sliding LOFT system + LOFT door leaf + pull handle + door closer on one or both side(s).

The double LOFT system is counted as 2 x single system + connecting rail element. Choice of two handles holding the leaf: INDUSTRIAL and RETRO.

LOFT sliding door system

oval, rectangular or round pull handle


solid core filling

round and square metal ventilation sleeves (4 pieces); black matt

door closer on one side

connector for tracks (enables the use of the LOFT system in the double-leaf system)

black door leaf edge finish



		"60"	"70"	"80"	"90"	"100"
S1	Door leaf width	644	744	844	944	1044
S2	Opening width in the wall	574	674	774	874	974
H1	Door leaf height	2150	2150	2150	2150	2150
H2	Opening height in the wall	2082	2082	2082	2082	2082

B-wall G- floor D- wall mounted buffer

WHITE TITANIUM UV PREMIUM / CPL **CPL 0.2** GREY MAPLE PREMIUM WALNUT PREMIUM OAK PREMILIM WHITE BARK PREMIUM GRAPHITE ASH PREMIUM CONCRETE PREMIUM HORIZONTAL LARCH NATUR OAK PREMIUM WHITE PREMIUM 1) WHITE TITANIUM UV OAK ST CPL GREY OAK ST CPL VENGE ST CPL GREY PINE ST CPL WHITE ST CPL^{1) 2)} NEW CAPPUCCINO ST CPL² LIGHT-GREY ST CPL² BLACK ST CPL²

ANTHRACITE CPI 0.2

OAK CPI 0.2

1) plain white laminate imitating a painted surface

ASH GREY CPL 0,2

ROUND, OVAL, RECTANGULAR PULL HANDLES

glossy chrome, brushed chrome, glossy brass, black matt



GUIDE RAIL LENGTHS:

- -200 cm for "60" "70" "80" leaves
- 250 cm for "90" "100" leaves

LEAF-HOLDING HANDLES



WHITE CPL 0,2

²⁾ special AntiFinger coating to reduce dirt and fingerprints



MAGIC Type



MAGIC LEAF, laminate OAK PREMIUM, oval pull handle

MAGIC Type wall-mounted sliding door system is available complete with the MAGIC Type plain door leaf only. The MAGIC door leaf comes with the stabilising "honeycomb" filling as standard or solid core for extra charge. The door leaf features a non-rebated edge. The system is designed for clear finished opening, without a tunnel.

The complete system includes the sliding MAGIC system + MAGIC door leaf + pull handle. The system is only available as a complete set (system + leaf).

MAGIC SLIDING DOOR SYSTEM


oval, rectangular or round pull handle

solid core filling

round and square metal sleeves (4 pcs); glossy chrome, brushed chrome, black matt


black door leaf edge finish

	MAGIC DOOR LEAF	
PREMIUM/CPL	CPL 0.2	WHITE TITANIUM UV PAINT

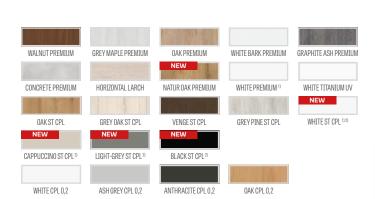

 $^{^{\}mbox{\scriptsize 1)}}$ plain white laminate imitating a painted surface



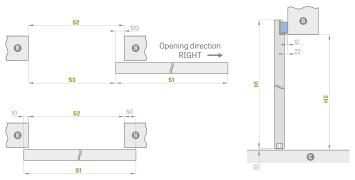

MAGIC WALL-MOUNTED SLIDING DOOR SYSTEM										
	"60"	"70"	"80"	"90"	"100"					
Door leaf width	644	744	844	944	1044					
Opening width in the wall	584	684	784	884	984					
Transition light	464	564	664	764	864					
Door leaf height	2150	2150	2150	2150	2150					
Opening height in the wall	2100	2100	2100	2100	2100					
	Door leaf width Opening width in the wall Transition light Door leaf height	Door leaf width 644 Opening width in the wall 584 Transition light 464 Door leaf height 2150	"60" "70" Door leaf width 644 744 Opening width in the wall 584 684 Transition light 464 564 Door leaf height 2150 2150	"60" "70" "80" Door leaf width 644 744 844 Opening width in the wall 584 684 784 Transition light 464 564 664 Door leaf height 2150 2150 2150	"60" "70" "80" "90" Door leaf width 644 744 844 944 Opening width in the wall 584 684 784 884 Transition light 464 564 664 764 Door leaf height 2150 2150 2150 2150					



ROUND, OVAL, RECTANGULAR PULL HANDLES

glossy chrome, brushed chrome, glossy brass, black matt





BLACK PLAIN DOOR LEAF EDGE FINISH



BLACK HORIZONTAL DOOR LEAF EDGE FINISH

²⁾ special AntiFinger coating to reduce dirt and fingerprints



GRAF GLASS DOORS



GRAF 38 SYSTEM

Sliding system for glass doors with a silver anodised aluminium or back matt powder-painted cover.

This system is complete and designed for fitting in a clear finished opening, as the tunnel is not available. The system range includes all GRAF glass panes, see p. 58/-59 and go to our website: www.erkado.pl and the B2B panel.

The complete system includes: sliding SYSTEM GRAF + glass pane SYSTEM GRAF + pull handle + door closer on one side

GLASS DOOR SLIDING SYSTEM

- silver anode
- black matt NEW


double-sided round pull handle, stainless steel

double-sided round pull handle, stainless steel, black matt

"90" glass pane extra charge

closer

	WALL-MOUNTED GLASS DOOR SLIDING SYSTEM										
		"60"	"70"	"80"	"90"						
S1	Door leaf width	662	762	862	962						
S2	Opening width in the wall	602	702	802	902						
S3	Guide rail length	1500	1500 1500		2000						
H1	Door leaf height		20	36							
H2	Opening height in the wall		max 2020								
Н3	Overall system height	2114									



PULL HANDLE stainless steel, matt black











SLIDING SYSTEMS

POCKET SYSTEMS

ERKADO pocket door system range includes:

	BASIC TUNNEL INSTALLATION									
SP1C.100	SP1C	Single "100" pocket sliding system Only available for STILE doors, painted doors and ALTAMURA 1, UNO PREMIUM and UNO LUX models								
SP2C.100	SP2C	Double "100" pocket sliding system Only available for STILE doors and ALTAMURA 1, UNO PREMIUM and UNO LUX models								
SP1C.125	SP1C	Single "125" pocket sliding system								
SP2C.125	SP2C	Double "125" pocket sliding system								
ZN1	ZNI	One-sided supplementary basic in-wall installation for SP1C.100 or SP1C.125 system								
ZN2	ZN2	One-sided supplementary basic in-wall installation for SP2C.100 or SP2C.125 system								

Not available for CPLO.2 & CPLO.7 laminates



Standard single/double pocket sliding system includes:

- aluminium case [LEON] SP1
- aluminium case [LEON] SP2
- non-rebated door leaf / two non-rebated door leaves price for standard door leaf / price for two door leaves
- · basic tunnel installation (see table above)
- tunnel installation ZN1 or ZN 2 see table on the next page

ROUND, OVAL AND RECTANGULAR PULL HANDLES

glossy chrome, brushed chrome, glossy brass, black matt



HOOK BOLT KEY LOCKS

glossy chrome, brushed chrome, glossy brass, black matt



Key only in silver

The hook bolt key lock comes with two pull handles to choose

ADDITIONAL CHARGES

frame joints at 90 degrees

hook bolt lock with hardware

only available for: SP1C.100, SP1C.125

${\color{red} \textbf{oval}, \textbf{rectangular}} \ \text{or} \ {\color{red} \textbf{round}} \ \text{pull handle}$

glossy chrome, brushed chrome, glossy brass, black matt Available for SP1C.100, SP2C.100, SP1C.125, SP2C.125 Pull handle set includes two pcs.

finger pull

glossy chrome, brushed chrome, glossy brass, black matt

synchronisation

simultaneous opening and closing of the door leaves using only one leaf only available for: SP2C.100, SP2C125

Soft closing damper

automatic soft close in the final closing phase; available for SP1C.100, SP1C125 only



One-sided adjustment range for the basic wall min-max (mm)
0-40;
40-60;
60-80;
80-100;
100-120;
120-140
140-160;
160-180;
180-200
200-220;
220-240
240-260;
260-280
280-300;
300-320
320-340;
340-360

• The system of one-sided in-wall installation for double doors ZN2 + 30% extra of the prices in table above

			SINGLE SLIDING SYSTEMS AND DOUBLE POCKET SYSTEMS									
		"60"	"70"	"80"	"90"	"100"	2 x "60"	2 x "70"	2 x "80"	2 x "90"	2 x "100"	
S 1	Door width	644	744	844	944	1044	1288	1488	1688	1888	2088	
S2	Frame opening width	602	702	802	902	1002	1202	1402	1602	1802	2002	
S 3	Pocket width	1318	1518	1718	1918	2118	2538	2938	3338	3738	4138	
S4	Frame cover width Architraves 6cm/Architraves 8cm	744 / 784	844 / 884	944/ 984	1044/ 1084	1144 / 1184	1344 / 1384	1544 / 1584	1744 / 1784	1944 / 1984	2144/ NA	
S5	Opening width in the pocket	655	755	855	955	1055	1255	1455	1655	1855	2055	
S6	Opening width in the wall	1338	1538	1738	1938	2138	2558	2958	3358	3758	4158	
H1	Door height	2030	2030	2030	2030	2030	2030	2030	2030	2030	2030	
H2	Frame cover height Architraves 6cm /Architraves 8cm	2092 / 2112	2092 / 2112	2092 / 2112	2092 / 2112	2092 / 2112	2092 / 2112	2092 / 2112	2092 / 2112	2092 / 2112	2092 / NA	
Н3	Pocket height	2115	2115	2115	2115	2115	2115	2115	2115	2115	2115	
H4	Frame opening height	2021	2021	2021	2021	2021	2021	2021	2021	2021	2021	
Н5	Opening height in the wall	2125	2125	2125	2125	2125	2125	2125	2125	2125	2115	





Photo: Wall-mounted sliding system

Photo: Pocket sliding system




SINGLE AND DOUBLE SYSTEMS

POCKET SYSTEMS

SP1C.100 (left, AWERS obverse glazing)

Fixed range of 100 mm

Pocket thickness before gypsum board installation – 75 mm




For UNO PREMIUM, UNO LUX, ALTAMURA 1 only, and for all stile door leaves. The system does not come with dust brushes (not required).

SP1C.125 (left, AWERS obverse glazing)


Fixed range of 125 mm

Pocket thickness before gypsum board installation – 100 mm



Only for use with panel door leaves which are supplied with a glass frame. The system includes gray dust brushes.

ZN1one-sided basic in-wall installation for **SP1C.100** and **SP1C.125**

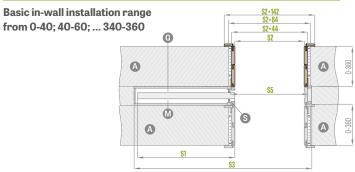


The drawing shows the basic in-wall installation ZN1 + ZN1.

SP2C.125 (AWERS obverse glazing)

Fixed range of 125 mm

Pocket thickness before gypsum board installation - 100 mm



Only for use with panel door leaves which are supplied with a glass frame. The system includes gray dust brushes.


SP2C.100 (AWERS obverse glazing)


Fixed range of 100 mm

Pocket thickness before gypsum board installation – 75 mm



For UNO PREMIUM, UNO LUX, ALTAMURA 1 only, and for all stile door leaves. The system does not come with dust brushes (not required).






A-wall

G- glass plain side M- glass matt side 1 gypsum boardS dust brushes

ZN2 one-sided basic in-wall installation for **SP2C.100** and **SP2C.125**

Basic in-wall installation range from 0-40; 40-60; ... 340-360



The drawing shows the basic in-wall installation ZN2 + ZN2.



REBATED AND NON-REBATED

USEFUL INFORMATION

DOUBLE-LEAF DOORS



- The double-leaf doors are supplied with a solid core filling for extra charge.
- The double-leaf doors are made according to available models of the flush single leaf doors, STILE doors with respective features: colour, finish (STANDARD, SOFT), glazing etc.
- Double-leaf doors available in CPL 0.2 & CPL 0.7
- · Passive doors use pull latches.
- Under "60" width passive door available in the full plain version only side panel (see drawing below).
- Side panels are made in the STANDARD edge flush technology.
 Available with the "honeycomb" filling as standard or solid core for extra charge. Grain direction of the side panels is vertical.
- · Both active and inactive door leaves come with lippings.
- · Lippings in CPL 0.7 door leaves are laminated with CPL 0.2
- The double-leaf doors in non-rebated technology is available with a magnetic lock only.
- Double non-rebated leaf doors come with an adjustable door frame only.
- Electric door strike is not available for the double-leaf doors.


AVAILABLE DOOR LEAF WIDTHS

 Panel and stile DOUBLE-LEAF DOORS from "120" to "190"** and mixes with full plain side panels

$60 + 30^{*}$ $70 + 30^{*}$ $80 + 30^{*}$	90 + 30*	100 + 30*
60 + 40* 70 + 40* 80 + 40*	90 + 40*	100 + 40*
$60 + 50^{\circ}$ $70 + 50^{\circ}$ $80 + 50^{\circ}$	90 + 50*	100 + 50*

- * Side panel available in standard technology only as a full plain version
- ** For "180" non-rebated doors

DOUBLE-LEAF DOOR PRICE:

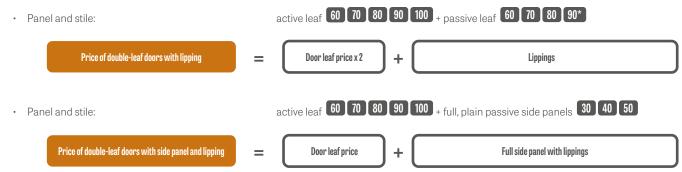


• Prices of fixed and adjustable door frames for double-leaf doors + 30%




DOUBLE-LEAF DOORS

NON-REBATED

NON-REBATED DOUBLE-LEAF DOORS WITH ADJUSTABLE DOOR FRAME

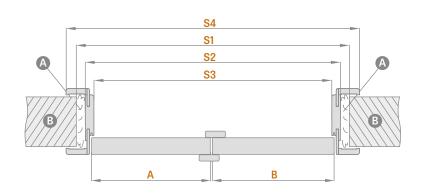









	A Produkt Joseffers		NON-REBATED DOUBLE-LEAF DOORS									
	Adjustable door frame	"90"	"100"	"110"	"120"	"130"	"140"	"150"	"160"	"170"	"180"	
A+B	Door leaf width	988	1088	1188	1288	1388	1488	1588	1688	1788	1888	
S1	Opening width in the wall	1061	1161	1261	1361	1461	1561	1661	1761	1861	1961	
S2	Frame outer width	1021	1121	1221	1321	1421	1521	1621	1721	1821	1921	
S 3	Frame opening width	977	1077	1177	1277	1377	1477	1577	1677	1777	1877	
S4	Frame cover width Strip 6 cm/Strip 8 cm	1119 / 1159	1219 / 1259	1319 / 1359	1419 / 1459	1519 / 1559	1619 / 1659	1719 / 1759	1819 / 1859	1919 / 1959	2019 / 2059	
H1	Door leaf height	2030	2030	2030	2030	2030	2030	2030	2030	2030	2030	
H2	Opening height in the wall	2073	2073	2073	2073	2073	2073	2073	2073	2073	2073	
Н3	Frame outer height	2053	2053	2053	2053	2053	2053	2053	2053	2053	2053	
H4	Frame opening height	2031	2031	2031	2031	2031	2031	2031	2031	2031	2031	
Н5	Frame cover height Strip 6 cm/Strip 8 cm	2102 / 2122	2102 / 2122	2102 / 2122	2102 / 2122	2102 / 2122	2102 / 2122	2102 / 2122	2102 / 2122	2102 / 2122	2102 / 2122	

DOUBLE-LEAF DOORS -SYMMETRIC



DOUBLE-LEAF DOORS -ASYMMETRIC



DOUBLE-LEAF DOORS
-WITH PLAIN SIDE PANEL









DOUBLE-LEAF DOORS

REBATED

REBATED DOUBLE-LEAF DOORS

WITH ADJUSTABLE DOOR FRAME

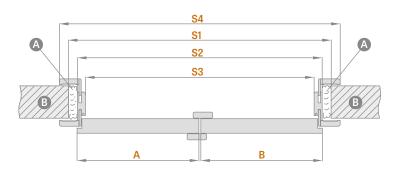





wall (C	– flooi
	wall C

	Adinotable desir forme	DOUBLE-LEAF DOORS										
	Adjustable door frame	"90"	"100"	"110"	"120"	"130"	"140"	"150"	"160"	"170"	"180"	"190"
A+B	Door leaf width	988	1088	1188	1288	1388	1488	1588	1688	1788	1888	1988
S1	Opening width in the wall	1034	1134	1234	1334	1434	1534	1634	1734	1834	1934	2034
S2	Frame outer width	994	1094	1194	1294	1394	1494	1594	1694	1794	1894	1994
S3	Frame opening width	950	1050	1150	1250	1350	1450	1550	1650	1750	1850	1950
S 4	Frame cover width Architraves 6 cm/Architraves 8 cm	1092 / 1132	1192 / 1232	1292 / 1332	1392 / 1432	1492 / 1532	1592 / 1632	1692 / 1732	1792 / 1832	1892 / 1932	1992 / 2032	2092 / 2132
H1	Door leaf height	2030	2030	2030	2030	2030	2030	2030	2030	2030	2030	2030
H2	Opening height in the wall	2060	2060	2060	2060	2060	2060	2060	2060	2060	2060	2060
НЗ	Frame outer height	2040	2040	2040	2040	2040	2040	2040	2040	2040	2040	2040
H4	Frame opening height	2018	2018	2018	2018	2018	2018	2018	2018	2018	2018	2018
Н5	Frame cover height Strip 6 cm /Strip 8 cm	2089 / 2109	2089 / 2109	2089 / 2109	2089 / 2109	2089 / 2109	2089 / 2109	2089 / 2109	2089 / 2109	2089 / 2109	2089 / 2109	2089 / 2109

REBATED DOUBLE-LEAF DOORS

WITH FIXED DOOR FRAME







Fixed door frame			DOUBLE-LEAF DOORS									
	Fixeu uvoi' il'aille		"100"	"110"	"120"	"130"	"140"	"150"	"160"	"170"	"180"	"190"
A+B	Door leaf width	988	1088	1188	1288	1388	1488	1588	1688	1788	1888	1988
S1	Opening width in the wall	1068	1168	1268	1368	1468	1568	1668	1768	1868	1968	2068
S2	Frame outer width	1038	1138	1238	1338	1438	1538	1638	1738	1838	1938	2038
S3	Frame opening width	950	1050	1150	1250	1350	1450	1550	1650	1750	1850	1950
H1	Door leaf height	2030	2030	2030	2030	2030	2030	2030	2030	2030	2030	2030
H2	Opening height in the wall	2077	2077	2077	2077	2077	2077	2077	2077	2077	2077	2077
НЗ	Frame outer height	2062	2062	2062	2062	2062	2062	2062	2062	2062	2062	2062
H4	Frame opening height	2018	2018	2018	2018	2018	2018	2018	2018	2018	2018	2018



FOLDING DOORS



CONSTRUCTION

- the door leaf is composed of two parts joined with concealed hinges
- MDF stile covered with two HDF boards or internal timber stile covered with two HDF boards for PREMIUM and cpl laminates
- honeycomb stabilising filling or solid core filling against an additional charge

FINISHING

- laminated HDF board
- STANDARD leaf edge
- the edge laminated in the same colour as the door leaf or, optionally, plain black edging NEW (transverse larch, black edge with a transverse structure)

HARDWARE

- three concealed hinges between leaves
- concealed guiding system in the top and bottom door sections
- A deadbolt lock, euro profile cylinder, economy lock or with a thumb


ADDITIONAL CHARGES

solid core filling

"100" door leaf

black door leaf edge finish NEW

FOLDING DOOR LEAF



Door width	A	В	C	E	F	G	Н
"60"	641	614	604	648	688	746*/786**	152.5
"70"	741	714	704	748	788	846*/886**	202.5
"80"	841	814	804	848	888	946*/986**	252.5
"90"	941	914	904	948	988	1046*/1086**	302.5
"100"	1041	1014	1004	1048	1088	1146*/1186**	352.5

^{*} Architraves 6 cm / ** Architraves 8 cm; joints at 45 degrees only

AVAILABLE DOOR LEAF WIDTHS

60 70 80 90 100





Installation vide https://youtu.be/tzccmzy7rvg

STANDARD WALNUT FINISH LIGHT ACACIA FINISH ACACIA FINISH WHITE GREKO 1) SNOW-WHITE GREKO 1) GREKO WALNUT SANREMO GREKO GREKO SONOMA MEDIUM GREKO OAK GRFKO FI M GOLDEN GREKO OAK GREKO GREY OAK GREKO WHITE PINE GREKO OAK WALNUT PREMIUM GREY MAPLE PREMIUM OAK PREMIUM WHITE BARK PREMIUM GRAPHITE ASH PREMIUM CONCRETE PREMIUM HORIZONTAL LARCH WHITE PREMIUM 13 NATUR OAK PREMIUM VENGE ST CPL GREY PINE ST CPL WHITE ST CPL 1) 2) OAK ST CPI GREY OAK ST CPI

BLACK ST CPL²⁾

min-max (mm)
80-100
100-120
120-140
140-160
160-180
180-200
200-220
220-240
240-260

Adjustment range min-max (mm)
260-280
260-300
280-300
300-320
320-340
340-360
360-380
380-400
400-420

CAPPUCCINO ST CPL²⁾

LIGHT-GREY ST CPL²⁾

¹⁾ plain white laminate imitating a painted surface

²⁾ special AntiFinger coating to reduce dirt and fingerprints



COVERT CONCEALED DOOR SYSTEM

OPENING INWARDS AND OUTWARDS



REBATED AND NON-REBATED DOOR LEAF

ALUMINIUM CONCEALED DOOR FRAME

CONSTRUCTION

- rebated or non-rebated door leaf
- wooden stile covered with two HDF boards
- honeycomb stabilising filling or solid core filling against an additional

FINISHING

- HDF board covered with PREMIUM laminate, UV paint or a laminate designed for subsequent paint coating or wallpapering
- door leaf edge made in rebated or non-rebated technology

HARDWARE

- required two mortise hinges in the door frame
- magnetic lock in the rebated and non-rebated leaf: with a key, thumb turn cylinder, economy or with a blockade

ADDITIONAL CHARGES

white door frame 3)

painted door leaf; WHITE TITANIUM UV

solid core filling

additional bottom bar (can be cut by customer up to max 8 cm)

round and square metal sleeves (4 pcs); Finish: brushed nickel, patina, white and black

plastic woodgrain sleeves (4 pcs)

ventilation door cut or grille

"100" door leaf

drop-down gasket 4)

magnetic stop (buffer) 4) NEW (available in six colours p. 132)



WALNUT PREMIUM



CONCRETE PREMIUM

WHITE PRIMER 2)



GREY MAPLE







OAK PREMIUM





GRAPHITE ASH PREMIUM

WHITE PREMIUM 1)

AVAILABLE DOOR LEAF WIDTHS














²⁾ used for wallpaper hanging and painting

³⁾ aluminium colour frame as standard

⁴⁾ the stop prevents application of a drop-down gasket and vice versa




COVERT CONCEALED DOOR SYSTEM

INWARDS OPENING REBATED DOOR LEAF

REBATED DOOR LEAF


ALUMINIUM CONCEALED DOOR FRAME

STANDARD DIMENSIONS FOR INWARDS OPENING REBATED DOOR LEAVES




Door leaf width	Construction opening width	Frame outer width	Clear opening width
Sd [mm]	So [mm]	Sz [mm]	Sp [mm]
620	700	690	605
720	800	790	705
820	900	890	805
920	1000	990	905
1020	1100	1090	1005


Door leaf height	Construction opening height	Frame outer height	Clear opening height
Hd [mm]	Ho [mm]	Hz [mm]	Hp [mm]
2030	2079	2072	2030




GYPSUM BOARD INSTALLATION



ALUMINIUM DOOR FRAME CROSS-SECTION



ENCLOSED IN WALL






COVERT CONCEALED DOOR SYSTEM

OUTWARDS OPENING NON-REBATED DOOR LEAF

NON-REBATED DOOR LEAF


ALUMINIUM CONCEALED DOOR FRAME

STANDARD DIMENSIONS FOR OUTWARDS OPENING NON-REBATED DOOR LEAVES




Door leaf width	Construction opening width	Frame outer width	Clear opening width
Sd [mm]	So [mm]	Sz [mm]	Sp [mm]
620	700	690	605
720	800	790	705
820	900	890	805
920	1000	990	905
1020	1100	1090	1005


Door leaf height	Construction opening height	Frame outer height	Clear opening height		
Hd [mm]	Ho [mm]	Hz [mm]	Hp [mm]		
2020	2069	2062	2020		




GYPSUM BOARD INSTALLATION



ALUMINIUM DOOR FRAME CROSS-SECTION



ENCLOSED IN WALL






GENRAL INFORMATION


The top and side lights are preassembled and glazed with the VSG 331 safety glass in a frosted or transparent variant. (Please state your choice of glass when placing orders)

AVAILABLE PRODUCT PACKAGES

SINGLE LEAF DOORS with top, side and corner lights



DOUBLE-LEAF DOORS with top, side and corner lights



- ** Ranges available as for the standard adjustable rebated door frames, see p. -163
- The matt VSG 331 or transparent VSG 331 safety glass is included and the price is the same for all laminates and ranges for rebated door frames.
- Prices apply to lights fitted on 6 and 8 cm architraves.
- To paint coated lights + 50% charge applies
- Fitting strips for lights are fixed with headless pins which are seen as small dark spots once nailed (especially in white laminates and paint coated lights).
- · Lighting not available in CPL 0.2 and CPL 0.7 laminates


LIGHTING CATEGORIES

FOR FIXED DOOR FRAMES

FOR ADJUSTABLE DOOR FRAMES

FOR SINGLE LEAF DOORS

FOR DOUBLE-LEAF DOORS

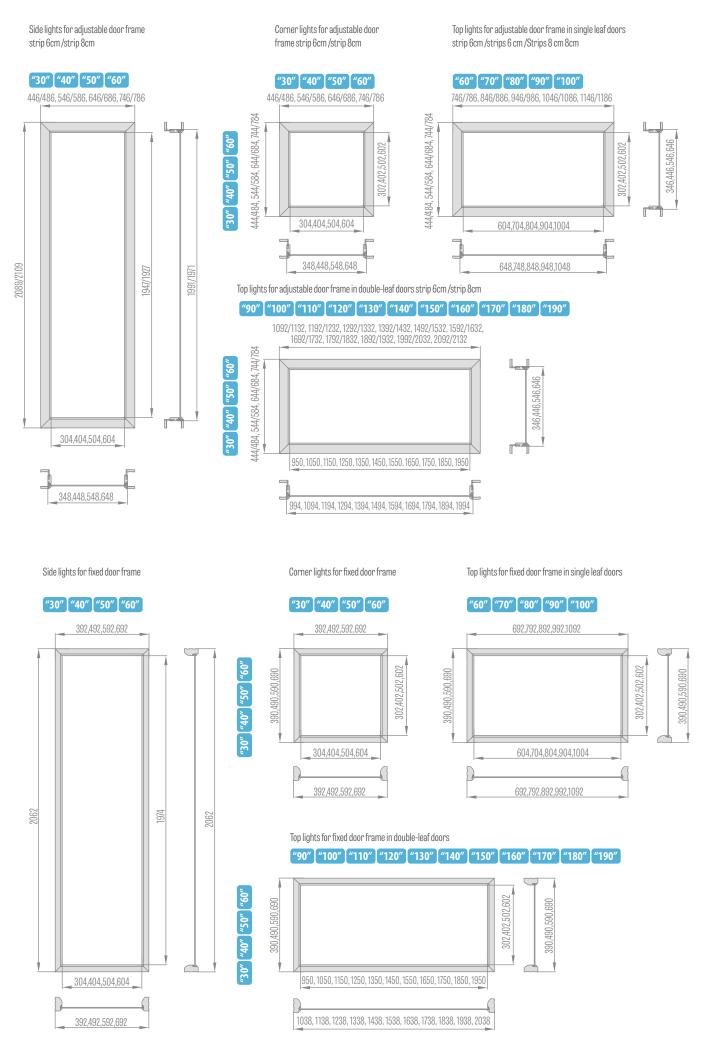

DOOR FRAMES

- The adjustable and fixed rebated door frames can be used for all types of ERKADO internal doors made in both flush and STILE technologies.
- The adjustable non-rebated door frames can be used for internal doors made in both flush and STILE technologies. These door frames are supplied
- The door frame is made with high quality MDF board and covered with durable wood grain film or coated with durable UV paint.
- Depending on the technology, the door frames are laminated with: FINISH, GREKO, CPL, PREMIUM and UV paint.
- The frames for STILE doors have a third hinge as standard.
- Each adjustable and fixed frame comes complete with disassembled frame components, hinges and screws. The components are supplied with predrilled holes for fixing.
- Each set is enclosed with assembly manual and warranty certificate.
- The fixed door frame for Herse collection is rectangular and its core is made of glulam timber.

ADJUSTABLE DOOR FRAME **REBATED DOOR LEAVES**



ADJUSTABLE OVERLAY DOOR FRAME

FOR STEEL DOOR FRAMES



ADJUSTABLE DOOR FRAME **NON-REBATED DOOR LEAVES**




STAND FIXED DOOR FRAME **REBATED DOOR LEAVES**




STANDARD SQUARE FOR ADJUSTABLE DOOR FRAME

Strip 6 cm / Strip 8 cm




SQUARE WITH EXTENDED TONGUE FOR ADJUSTABLE DOOR FRAME


Strip 6 cm / Strip 8 cm





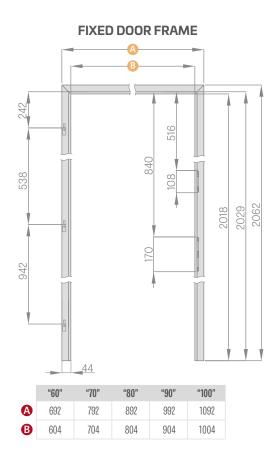


ADJUSTABLE DOOR FRAME

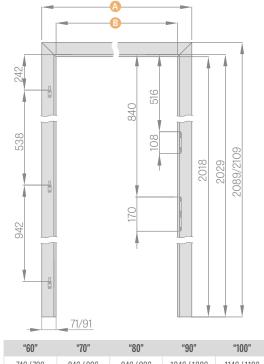

	"60"	"70"	"80"	"90"	"100"
A	746 / 786	846/886	946/986	1046/1086	1146 / 1186
B	604	704	804	904	1004

strip 6cm/strip 8cm


TUNNEL TYPE ADJUSTABLE DOOR FRAME



	"60"	"70"	"80"	"90"	"100"	"110"	"120"
A	746 / 786	846/886	946/986	1046/1086	1146 / 1186	1246 / 1286	1346 / 1386
B	604	704	804	904	1004	1104	1204
	"130"	"140"	"150"	"160"	"170"	"180"	"190"
A	"130" 1446 / 1486	"140" 1546 / 1586	"150" 1646/1686	"160" 1746 / 1786	"170" 1846/1886	"180" 1946/1986	"190" 2046 / 2086

strip 6cm/strip 8cm


CASING DOOR FRAME




	"60"	"70"	"80"	"90"	"100"
A	737	837	937	1037	1137
B	624	724	824	924	1024
Θ	564	664	764	864	964

FIXED DOOR FRAME FOR DOUBLE-LEAF DOORS

ADJUSTABLE DOOR FRAME FOR DOUBLE-LEAF DOORS




	"90"	"100"	"110"	"120"	"130"	"140"
A	1038	1138	1238	1338	1438	1538
B	950	1050	1150	1250	1350	1450
	"150"	"160"	"170"	"180"	"190"	
A	"150" 1638	"160" 1738	"170" 1838	"180" 1938	"190" 2038	

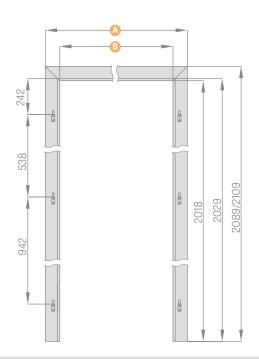

	"90"	"100"	"110"	"120"	"130"	"140"
A	1092/1132	1192/1232	1292/1332	1392/1432	1492/1532	1592/1632
B	950	1050	1150	1250	1350	1450
	"150"	"160"	"170"	"180"	"190"	
A	"150" 1692/1732	"160" 1792/1832	"170" 1892/1932	"180" 1992/2032	"190" 2092/2132	

strip 6cm/strip 8cm


FIXED DOOR FRAME FOR GLASS DOORS

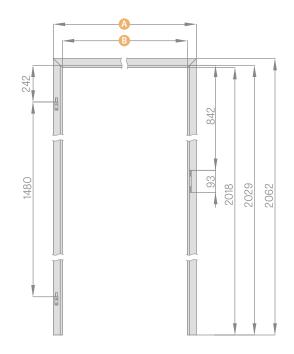

	"60"	"70"	"80"	"90"
A	692	792	892	992
B	604	704	804	904

10 mm pin hinge for glass panes frames

ADJUSTABLE DOOR FRAME FOR GLASS DOORS

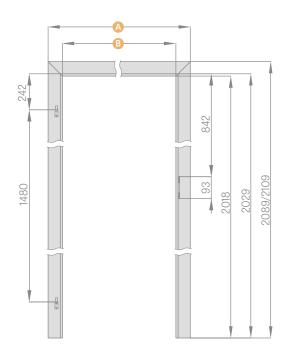

	"60"	"70"	"80"	"90"		
A	746/786	846/886	946/986	1046/1086		
B	604	704	804	904		

strip 6cm/strip 8cm



TUNNEL TYPE ADJUSTABLE DOOR FRAME

REBATED / NON-REBATED

TUNNEL TYPE DOOR FRAMES

The tunnel type door frames are adjustable door frames without any hardware. They are made with a top strip and two vertical strips.

They can be used to finish door openings and safeguard wall corners, but mainly are fitted for interior decoration effects.

The tunnel type adjustable rebated door frames are also used in the ERKADO sliding systems.

The tunnel type adjustable non-rebated door frames are not used in the sliding systems.

Depending on the system, we use the following rebated tunnels:

TUNNEL FOR SP1N	Wall-mounted single sliding system
TUNNEL FOR SP2N	Wall-mounted double sliding system
TUNNEL FOR SP1C.100	Single "100" pocket sliding system
TUNNEL FOR SP2C.100	Double "100" pocket sliding system
TUNNEL FOR SP1C.125	Single "125" pocket sliding system
TUNNEL FOR SP2C.125	Double "125" pocket sliding system
Encasing ZN1	Wall encasing for one side of the single leaf systems SP1C.100 and SP1C.125
Encasing ZN2	Wall encasing for one side of the double-leaf systems SP2C.100 i SP2C.125

		ADJUSTABLE REBATED TUNNELS												
	"60"	"70"	"80"	"90"	"100"	"110"	"120"	"130"	"140"	"150"	"160"	"170"	"180"	"190"
Opening width in the wall	688	788	888	988	1088	1188	1288	1388	1488	1588	1688	1788	1888	1988
Tunnel outer width	648	748	848	948	1048	1148	1248	1348	1448	1548	1648	1748	1848	1948
Tunnel opening width	604	704	804	904	1004	1104	1204	1304	1404	1504	1604	1704	1804	1904
Tunnel cover width Strip 6 cm /Strip 8 cm	746 / 786	846 / 886	946 / 986	1046 / 1086	1146 / 1186	1246 / 1286	1346 / 1386	1446 / 1486	1546 / 1586	1646 / 1686	1746 / 1786	1846 / 1886	1946 / 1986	2046 / 2086
Opening height in the wall	2060	2060	2060	2060	2060	2060	2060	2060	2060	2060	2060	2060	2060	2060
Tunnel outer height	2040	2040	2040	2040	2040	2040	2040	2040	2040	2040	2040	2040	2040	2040
Tunnel opening height	2018	2018	2018	2018	2018	2018	2018	2018	2018	2018	2018	2018	2018	2018
Tunnel cover height Strip 6 cm/Strip 8 cm	2089/2109	2089/2109	2089/2109	2089/2109	2089/2109	2089/2109	2089/2109	2089/2109	2089/2109	2089/2109	2089/2109	2089/2109	2089/2109	2089/2109

		ADJUSTABLE NON-REBATED TUNNELS											
	"60"	"70"	"80"	"90"	"100"	"110"	"120"	"130"	"140"	"150"	"160"	"170"	"180"
Opening width in the wall	713	813	913	1013	1113	1213	1313	1413	1513	1613	1713	1813	1913
Tunnel outer width	673	773	873	973	1073	1173	1273	1373	1473	1573	1673	1773	1873
Tunnel opening width	629	729	829	929	1029	1129	1229	1329	1429	1529	1629	1729	1829
Tunnel cover width strip 6 cm/strip 8 cm	771/ 811	871/ 911	971 / 1011	1071/ 1111	1171/ 1211	1271/ 1311	1371/ 1411	1471/ 1511	1571/ 1611	1671/ 1711	1771/ 1811	1871/ 1911	1971/ 2011
Opening height in the wall	2073	2073	2073	2073	2073	2073	2073	2073	2073	2073	2073	2073	2073
Tunnel outer height	2053	2053	2053	2053	2053	2053	2053	2053	2053	2053	2053	2053	2053
Tunnel opening height	2031	2031	2031	2031	2031	2031	2031	2031	2031	2031	2031	2031	2031
Tunnel cover height strip 6 cm/strip 8 cm	2102 / 2122	2102 / 2122	2102 / 2122	2102 / 2122	2102 / 2122	2102 / 2122	2102 / 2122	2102 / 2122	2102 / 2122	2102 / 2122	2102 / 2122	2102 / 2122	2102 / 2122




STEEL DOOR FRAME

FOR GRAF STILE, PANEL & GLASS DOOR LEAVES

ADJUSTABLE STEEL DOOR FRAME


(OVERLAPPING), 1.5 mm wide sheet metal 1.5 mm

Welded and coated in RAL 9010, 9016, 8003, 8017, 7016, 7047, 1001

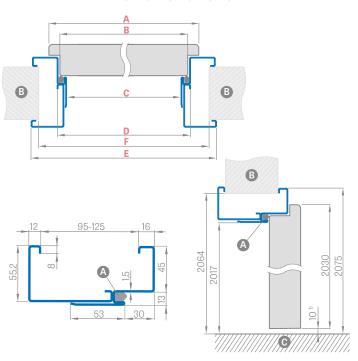

SQUARE STEEL DOOR FRAME (LARGE), sheet metal 1.2 mm

Welded and coated in RAL 9010, 9016, 8003, 8017, 7016, 7047, 1001

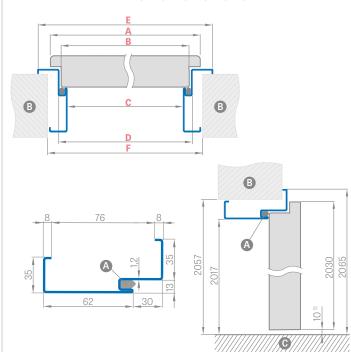

1) allowable deviation due to frame dimensional tolerance of +- 3mm (we recommend to check before installation)


Door width	A	В	C	D	E	F
"60"	644	617	601	627	717	695
"70"	744	717	701	727	817	795
"80"	844	817	801	827	917	895
"90"	944	917	901	927	1017	995
"100"	1044	1017	1001	1027	1117	1095

Adjustment Range min-max (mm)							
95-125							
125-155							
155-185							
185-215							
215-245							
245-275							
275-305							



Door width	A	В	C	D	E	F
"60"	644	617	601	627	697	681
"70"	744	717	701	727	797	781
"80"	844	817	801	827	897	881
"90"	944	917	901	927	997	981
"100"	1044	1017	1001	1027	1097	1081

FITTING THE SQUARE FRAME



ADDITIONAL CHARGES

A-gasket **G**–floor

electric door strike

door closer reinforcement

galvanised sheet steel

adjustable "100" door frame

fixed "100" door frame

door frame for double-leaf doors


non-typical RAL (intensive, pearly and metallic colours not included)



ADJUSTABLE OVERLAY DOOR FRAME

FOR STEEL DOOR FRAMES

HANDLE POSITION IN AN OVERLAY DOOR FRAME



- L distance between the handle centre line and the frame strip edge
- L = 23 mm for panel doors, SYDNEY or QUBIK handle, p. 124
- L = 28 mm for STILE frame doors (all interior door handles presented in the offer are available)

NOTE: Check the handle face plate dimensions before installation.

Adjustable overlay door frame of over 200 mm consists of two components, and a frame of over 320 mm consists of three elements.

AVAILABLE WIDTHS FOR OVERLAY FRAMES:











	Adjustment range min-max (mm)
	80-100
Ħ T	100-120
pone	120-140
COM	140-160
	160-180
	180-200
	200-220
nts	220-240
poone	240-260
com	260-280
- 20	280-300
	300-320
	320-340
ents	340-360
component	360-380
con	380-400
_	400-420
	420-440

OVERLAY DOOR FRAME DIAGRAM



Door width	A	В	C	D	E	F	G
"60"	644	624	618	564	592	598	737
"70"	744	724	718	664	692	698	837
"80"	844	824	818	764	792	798	937
"90"	944	924	918	864	892	898	1037
"100"	1044	1024	1018	964	992	998	1137

F - min dimension of the steel frame opening, on which to fit an overlay door frame. This dimension can exceed the recommended one by max 20 mm. For greater frame opening, ensure the architraves cover the wall appropriately.



- $^{1)}$ allowable deviation due to frame dimensional tolerance of +- 3mm (we recommend to check before installation)
- A-steel door frame

G-floor

B-wall D- handle


aluminium profilewith gasket

2-range from 80 mm to 255 mm


- 120 mm extension for overlay frame
- Standard square for an overlay frame
- Square with extended tongue
- Tunnel type door frame for widths of 60, 70, 80, 90, 100 are at the price of the adjustable overlay door frame.
- The tunnel is of the same dimensions as the overlay door frame and is not pre-drilled for hinge or door striker plate, but is supplied with a gasket.

REVERSE DOOR FRAME

REVERSE DOOR LEAVES

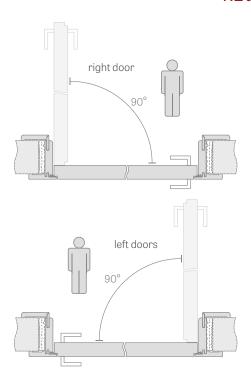



ADJUSTMENT RANGE FOR REVERSE DOOR FRAME



	Adjustment range min-max (mm)
	75-95
П	95-115
- 1	115-135
Ħ	135-155
)00	155-175
component	175-195
10	195-215
	215-235
Ц	235-255
.S.	255-275
nen	275-295
components	295-315
-2 α	315-335
	335-355

- The frame for reverse door leaves is available only with an 8 cm square joined at 45 degrees.
- The frame contains two so-called concealed hinges invisible when the leaf is closed
- Available decors within the colour group: GREKO, PREMIUM, CPL and WHITE TITANIUM UV varnish
- The UV WHITE TITAN varnished door frame is also available at an extra cost with an 8 cm corner joined at 90 degrees (not available for the 75-95 mm range) **NEW**





1) allowable deviation due to frame dimensional tolerance of +- 3mm (we recommend to check before installation)

Door width	A	В	C	D	E	F	G
"60"	624	644	652	696	736	834	791
"70"	724	744	752	796	836	934	891
"80"	824	844	852	896	936	1034	991
"90"	924	944	952	996	1036	1134	1091
"100"	1024	1044	1052	1096	1136	1234	1191

- A foam B wall C floor D rubber gasket
- Can be replaced with hinges and catch plate in black NEW

120 mm extension for reversible laminate frame

- Movable square with 2 cm leaf extension and standard corner for adjustable frames in all laminates
- The door frame above 255 mm is composed of two parts
 - Top panels can be glued to the wall for an additional charge page 134 NEW






ADJUSTABLE DOOR FRAME

NON-REBATED DOOR LEAVES

ADJUSTABLE DOOR FRAME RANGE 80-95mm

strip 6 cm / strip 8 cm

strip 6 cm / strip 8 cm



The square tongue is to be cut by customer to required size, for door frames within 80-95mm range

ADJUSTABLE DOOR FRAME RANGE


DOOR FRAME JOINTS



/80




ADJUSTABLE DOOR FRAME DIAGRAM




Door width	A	В	C	D	E	F
"60"	644	629	651	673	714	771*/811**
"70"	744	729	751	773	814	871*/911**
"80"	844	829	851	873	914	971*/1011**
"90"	944	929	951	973	1014	1071*/1111**
"100"	1044	1029	1051	1073	1114	1171*/ 1211**





max min.



1) allowable deviation due to frame dimensional tolerance of +- 3mm (we recommend to check before installation)




- Adjustable rebate-free door frame in CPLO.2 is also used in combination with doors in CPLO.7
- Can be replaced with hinges and catch plate in black NEW
- Joints at 90 degrees possible for door frames with the 8 cm architraves only. Additional charge - frame joints at 90°
- The door frame above 295 mm is composed of two parts
- Prices of adjustable door frames for double-leaf doors + 30%
- 120 mm extension for rebate-free, laminated door frame
- Movable square with 2 cm leaf extension and standard corner for adjustable frames in all laminates
- Tunnel type door frame for widths of 60, 70, 80, 90, 100 are at the price of the adjustable overlay door frame.
- Tunnel type door frame for widths of 110, 120, 130, 140, 150, 160, 170, 180, 190 are at the price of the adjustable door frame for rebated double-leaf doors (see Table p. 150)
- Top panels glued to the wall (only for frames with 8 cm corner) p. 134

FIXED DOOR FRAME

REBATED DOOR LEAVES

FIXED DOOR FRAME

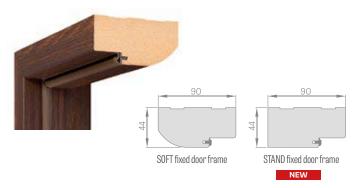


CLIP-ON SQUARE 6 cm and 8 cm (3 pcs. of clips supplied)





MASKING STRIP 8 mm





MASKING STRIP 16 mm






QUARTER ROUND



SOFT AND STAND FIXED DOOR FRAME DIAGRAM

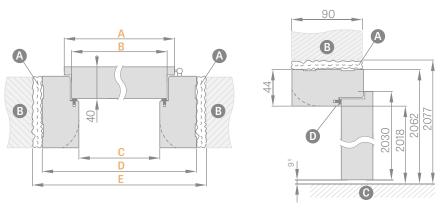


ELECTRIC DOOR STRIKE

 $^{1)}$ allowable deviation due to frame dimensional tolerance of +- 3mm (we recommend to check before installation)

SKIRTING BOARD length 2,40 mb





- The skirting board is made of moisture resistant MDF board. Available variants: WHITE TITANIUM UV paint, laminates: GREKO, ST CPL, PREMIUM and in base laminate to be paint coated.
- · Fitting method: bonding to wall

Door width	A	В	C	D	E
"60"	644	618	604	692	722
"70"	744	718	704	792	822
"80"	844	818	804	892	922
"90"	944	918	904	992	1022
"100"	1044	1018	1004	1092	1122

- Fixed door frame for double-leaf doors + 30%
- Non-rebated fixed door frame NA
- The fixed frame, architrave and clip-on square in CPL 0.2 are also used in the set for door leaves in CPL 0.7

A foam B wall G floor D rubber gasket



ADJUSTABLE DOOR FRAME


REBATED DOOR LEAVES




Adjustable door frame above 280 mm is composed of two parts (not within the 260-300mm range), and above 400 mm - three parts (they are not of equal size).

ADJUSTABLE DOOR FRAME RANGE


strip 6 cm / strip 8 cm



DOOR FRAME JOINTS




ADJUSTABLE DOOR FRAME DIAGRAM

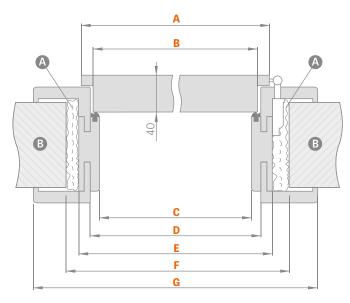

Door width	A	В	C	D	E	F	G
"60"	644	618	604	626	648	688	746*/786**
"70"	744	718	704	726	748	788	846*/886**
"80"	844	818	804	826	848	888	946*/986**
"90"	944	918	904	926	948	988	1046*/1086**
"100"	1044	1018	1004	1026	1048	1088	1146*/1186**

^{*} strip 6 cm / ** strip 8 cm



 $^{^{1)}}$ allowable deviation due to frame dimensional tolerance of +- 3mm (we recommend to check before installation)











	Adjustment range min-max (mm)
Г	80-100
	100-120
	120-140
	140-160
 -	160-180
ponen	180-200
1com	200-220
	220-240
	240-260
	260-280
L	260-300
Г	280-300
ts	300-320
omponen	320-340
2 com	340-360
	360-380
L	380-400
Γ	400-420
mponents	

- The CPL 0.2 adjustable rebated frame is also used with CPL 0.7 door leaves
- Joints at 90 degrees possible for door frames with the 8 cm strips only.
 Additional charge for joining at 90 degrees.
- · Electric door strike
- · Door closer reinforcement
- Prices of fixed and adjustable door frames for double-leaf doors + 30 %
- Movable square with 2 cm leaf extension and standard corner for adjustable frames in all laminates
- Extension 120 mm for adjustable frame, laminated and CPL 0.2 and lacquered
- It is possible to produce frames up to the range of 500-520 mm
- · Tunnel type door frame for both rebated and non-rebated door widths of 60, 70, 80, 90, 100 are at the price of the rebated adjustable door frames.
- Tunnel type door frame for both rebated and non-rebated door widths of 110, 120, 130, 140, 150, 160, 170, 180, 190 are at the price of the adjustable door frame for rebated double-leaf doors
- Top panels glued to the wall (only for frames with 8 cm corner) p. 134 NEW





The warranty certificate and assembly manual are attached with products.

This Product Guide is for reference only, and shows current prices and product availability.

The manufacturer reserves the right to modify prices and product availability without prior notice.

Actual colours in colour charts can differ from these indicated in this Product Guide. Please consult the colours with original colour charts available at our dealer centres.

The photos in the Product Guide are for reference only and dimensional proportions of some components can occur for different door leaf widths.

We reserve the right to printing mistakes.

The Product Guide is not an offer in legal terms and is published only for reference.

Edition I/2021/A applies as of 02/03/2021.

The door should be selected on the basis of a basic design of a facility, prepared considering all applicable standards and provisions of law, as well as frequency and conditions of use. ERKADO offers several variants, but leaves the final choice to the Buyer, because only the Buyer or their representatives knows the purpose and conditions of use for the product to be ordered.

Certificates can be downloaded from our website www.erkado.pl



The colours shown in the Product Guide can differ from the original.